



# ULTRA-CURE<sup>®</sup> TABER ABRASION SEALERS

FOR SOLID AND ENGINEERED WOOD FLOORING

- TABERGUARD™ 4083
- TABERSTRONG™ 4031
- TABERMAX™ 4081



**SHERWIN-WILLIAMS<sup>®</sup>**

visit [wood.sherwin-williams.com](http://wood.sherwin-williams.com)

10-20-21\_acc  
[Accessibility Statement](#)


# ULTRA-CURE® TABER ABRASION SEALERS

FOR SOLID AND ENGINEERED WOOD FLOORING

The line of Sherwin-Williams Ultra-Cure Taber Abrasion Sealers is three-tiered, providing a range of performance attributes to meet the various wear resistance demands for prefinished UV flooring. Infused with aluminum oxide technology, TaberGuard™, TaberStrong™ and TaberMax™ provide wear resistance against the rigors of daily life without sacrificing appearance.

## Ultra-Cure Taber Abrasion Sealers

TaberGuard 4083	TaberStrong 4031	TaberMax 4081
Ideal for entry level Taber performance requirements, typically ranging from 300-500 abrasion cycles	Delivers Taber abrasion performance of 1,000 abrasion cycles per coat over sealed wood	Highest performance abrasion sealer designed to meet 2,000-5,000+ abrasion cycles per coat over sealed wood
Apply at 13-20 grams per square meter	Apply at 20-30 grams per square meter	Apply at 25-35 grams per square meter
Preferred for an open grain look	Excellent build and flexibility Reduced coats for increased throughput	Reduced coats for increased throughput
Good performance, ideal for fundamental flooring system	Improved performance, ideal for high traffic residential flooring	Superior performance, ideal for commercial applications

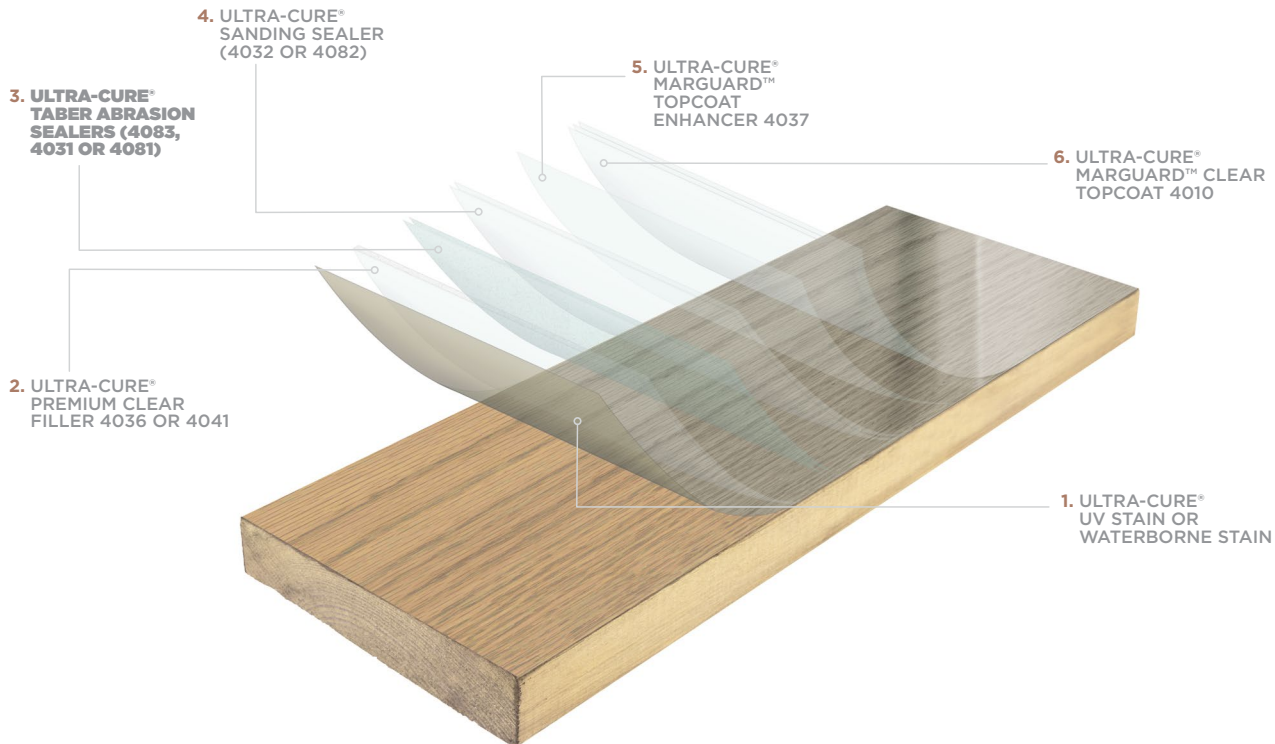

Since 1866, Sherwin-Williams has provided manufacturers and finishers with the coatings they need to make their products look better and last longer, while helping their operations meet productivity and sustainability goals. For the industrial wood market, our innovative solutions go beyond coatings to include knowledge, tools, equipment, supplies and industry-leading support. For a better finish, ask Sherwin-Williams.