



CERTIFICATION DOCUMENT

BS-RC-0034

Issued: 29th February 2024

Sherwin-Williams Protective & Marine Coatings

101 PROSPECT AVE,
CLEVELAND
OH, 44115-1093
US

The product has been assessed against the requirements of the UL Guide Category: CDXA

UL Certified Product

FIRETEX FX1003/FX2003

Copyright © 2024 UL Solutions.

UL solutions.

333 Pfingsten Road, Northbrook, IL 60062-2096 USA

UL LLC. authorizes the above named company to reproduce this document provided it is reproduced in its entirety.



CERTIFICATION of FIRETEX FX1003/FX2003 Sherwin-Williams Protective & Marine Coatings

This certification relates to the use of a reactive coating system known as FIRETEX FX1003/FX2003 for the fire protection of steel I-section beams and columns, hollow section columns and beams. The performance scope of the certification is given in Tables below which show the total dry film thickness of FIRETEX FX1003/FX2003 (excluding primer and top coat) required to provide fire resistance periods in accordance with BS 476: Part 21: 1987 within the range of 15 minutes to 150 minutes for the structural steel beams and columns, section factors and steel design temperatures.

This certification is designed to demonstrate compliance of the product or system specifically with Approved Document B (England and Wales), Section D of the technical Standard (Scotland), Technical Booklet E (Northern Ireland). If compliance is required to other regulatory or guidance documents there may be additional considerations or conflict to be taken into account.

The products are certified on the basis of:

- a) Initial type testing.
- b) Audit testing
- c) FUS-FPC
- d) Quality system – ISO 9001
- e) Performance assessment adopting the principles of the ASFP 'Yellow Book' 5th Edition as required by UL guide category CDXA.


The data given in the performance tables of this certificate is applicable to steel sections blast cleaned to ISO 8501-1 Sa 2½ or equivalent and optionally maybe primed with a suitable compatible primer. Specifications of primers and top coats are available from Sherwin-Williams Protective & Marine Coatings., whose responsibility it is to ensure that FIRETEX FX1003/FX2003 is compatible for use in respect of both ambient and fire conditions. The dry film thickness of primer and top coat should not exceed that tested.

The data given in the performance tables relates to steel design temperatures for the section type and size. Selection of the appropriate design temperature is dependent on the actual load conditions for the section and as such the design temperature should be provided by a suitably qualified structural engineer.


In the absence of an appropriate design temperature guidance may be obtained by reference to the current edition of the ASFP 'Yellow Book' clause relating to default limiting and critical temperatures.

It is acceptable to derive a protection thickness by linear interpolation between the temperatures given in the tables should the actual design or limiting critical temperature fall between two given temperatures.

This certification relates to ongoing production. Product and/or its immediate packaging are identified with the manufacturers name, the product name and the UL Certified label.

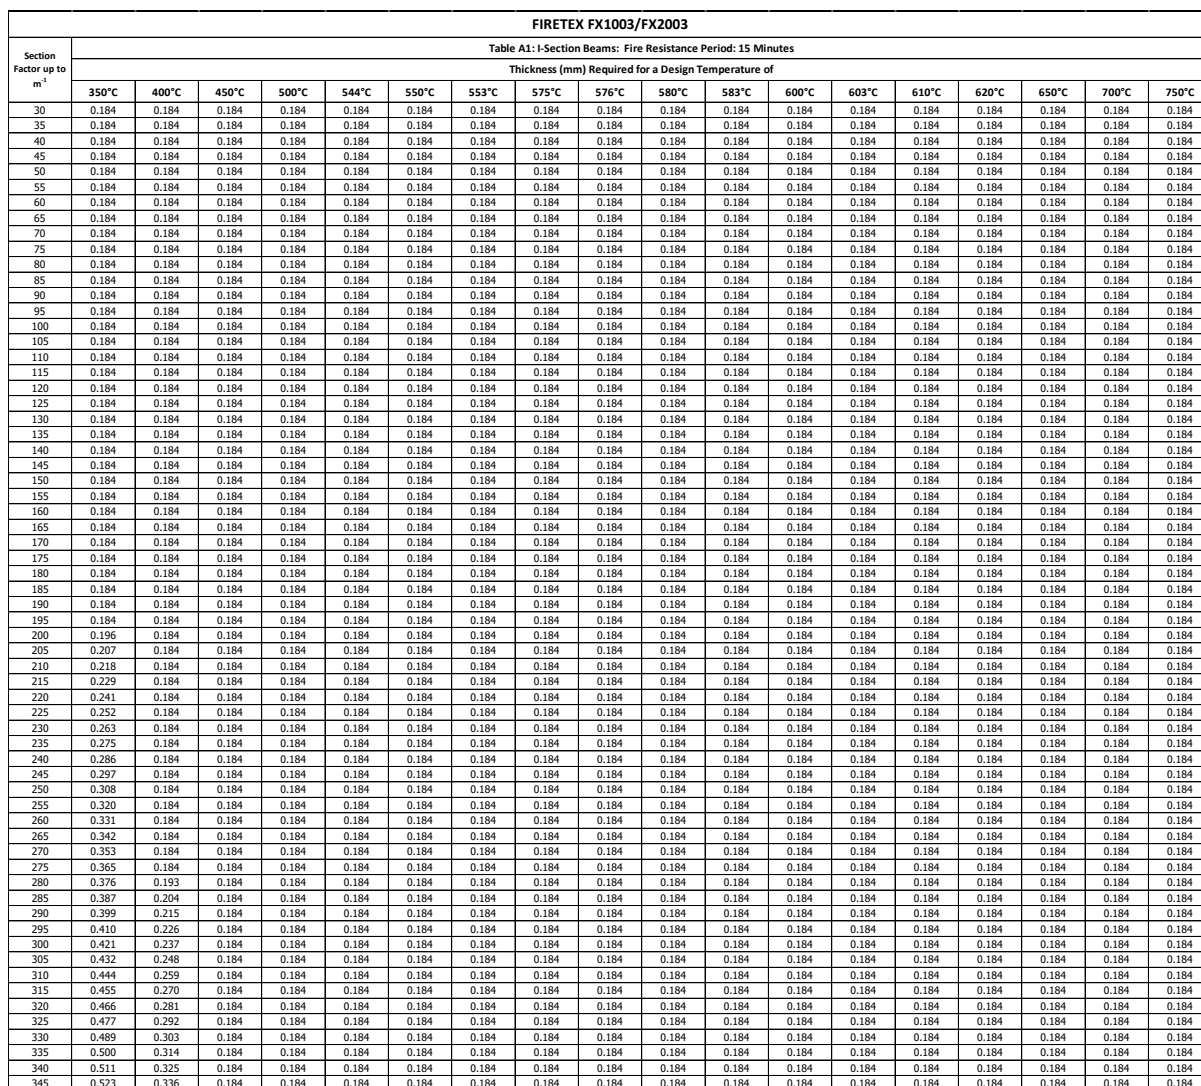

BS-RC-0034
Page 3 of 49

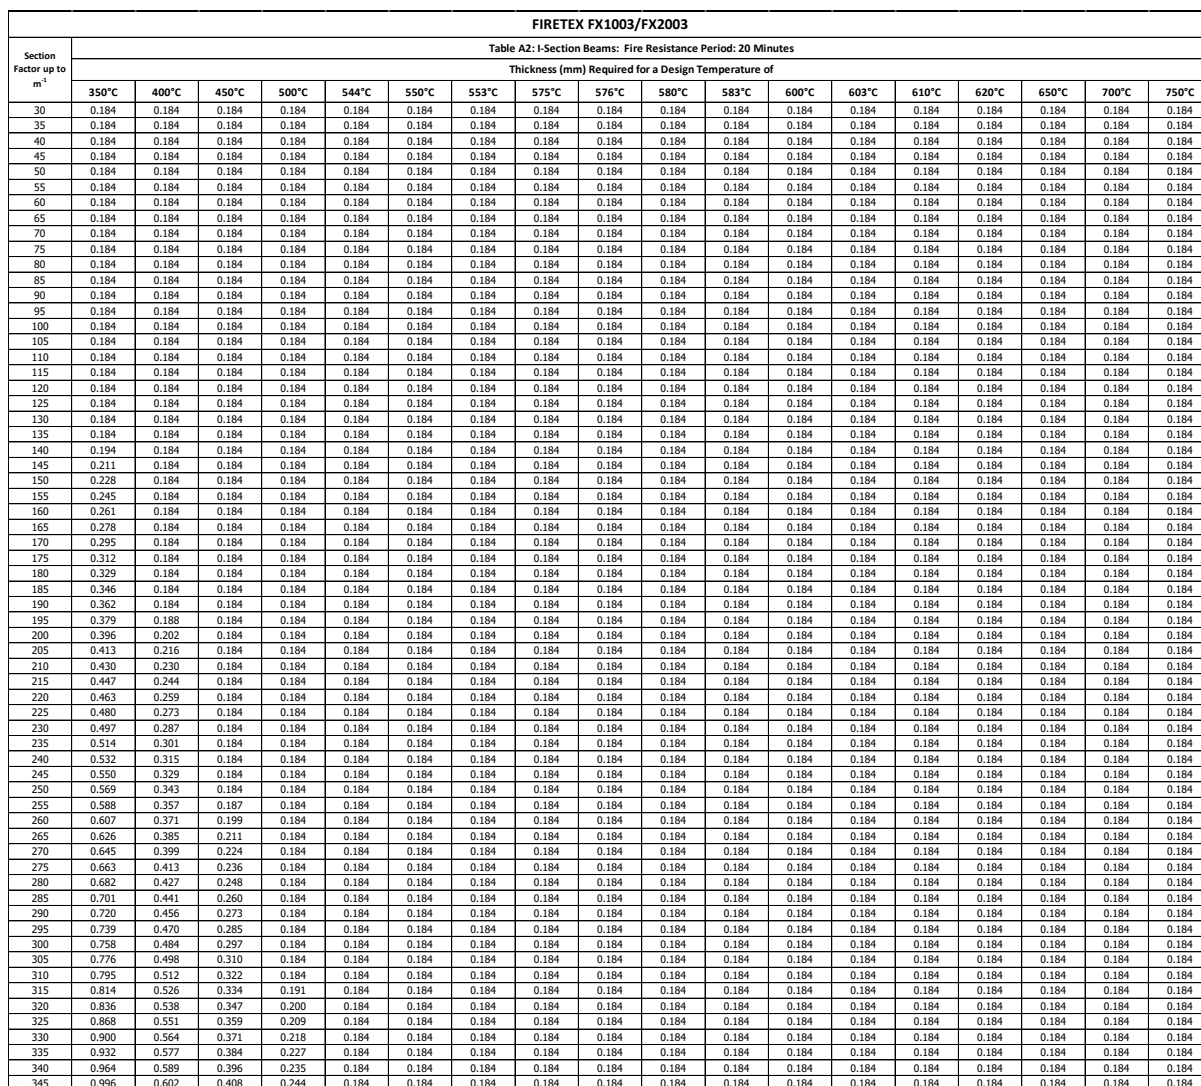



FIRETEX FX1003/FX2003																			
Section Factor up to m ²	Table A8: I-Section Beams: Fire Resistance Period: 105 Minutes																		
	Thickness (mm) Required for a Design Temperature of																		
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C	750°C	
30	2.762	1.437	0.858	0.689	0.536	0.524	0.519	0.482	0.480	0.474	0.469	0.438	0.433	0.423	0.408	0.362	0.293	0.184	
35	3.198	2.218	1.075	0.783	0.616	0.600	0.593	0.549	0.547	0.540	0.536	0.503	0.498	0.486	0.469	0.418	0.340	0.262	
40	-	2.668	1.376	0.900	0.696	0.675	0.666	0.605	0.603	0.594	0.587	0.553	0.548	0.538	0.526	0.474	0.387	0.305	
45	-	2.955	1.767	1.039	0.776	0.750	0.739	0.662	0.659	0.648	0.639	0.595	0.589	0.576	0.559	0.526	0.434	0.348	
50	-	3.243	2.158	1.178	0.864	0.826	0.812	0.719	0.716	0.701	0.691	0.638	0.630	0.613	0.592	0.547	0.481	0.390	
55	-	3.531	2.515	1.357	0.967	0.925	0.905	0.776	0.772	0.755	0.743	0.681	0.671	0.651	0.625	0.568	0.526	0.433	
60	-	3.819	2.730	1.538	1.070	1.026	1.004	0.836	0.828	0.808	0.794	0.723	0.713	0.688	0.657	0.590	0.561	0.476	
65	-	-	2.944	1.720	1.173	1.126	1.104	0.931	0.923	0.887	0.861	0.766	0.754	0.726	0.690	0.611	0.595	0.518	
70	-	-	3.158	1.902	1.247	1.214	1.198	1.026	1.018	0.983	0.957	0.808	0.795	0.763	0.723	0.633	0.629	0.535	
75	-	-	3.373	2.083	1.317	1.284	1.268	1.121	1.113	1.078	1.053	0.883	0.847	0.801	0.756	0.664	0.664	0.549	
80	-	-	3.587	2.265	1.387	1.354	1.337	1.208	1.202	1.173	1.149	0.987	0.953	0.858	0.789	0.698	0.698	0.563	
85	-	-	3.802	2.447	1.457	1.423	1.407	1.277	1.271	1.246	1.228	1.091	1.059	0.973	0.821	0.732	0.732	0.577	
90	-	-	-	2.628	1.527	1.493	1.476	1.346	1.340	1.314	1.297	1.192	1.165	1.088	0.932	0.767	0.767	0.591	
95	-	-	-	2.810	1.597	1.563	1.546	1.415	1.409	1.383	1.365	1.260	1.241	1.196	1.066	0.801	0.801	0.605	
100	-	-	-	2.992	1.667	1.632	1.615	1.484	1.478	1.452	1.434	1.328	1.308	1.263	1.193	0.835	0.835	0.619	
105	-	-	-	3.173	1.736	1.702	1.685	1.553	1.546	1.521	1.503	1.396	1.376	1.331	1.260	0.870	0.870	0.632	
110	-	-	-	3.355	1.806	1.772	1.754	1.621	1.615	1.589	1.571	1.464	1.444	1.398	1.327	0.904	0.904	0.646	
115	-	-	-	3.536	1.876	1.841	1.824	1.690	1.684	1.658	1.640	1.531	1.511	1.465	1.394	0.938	0.938	0.660	
120	-	-	-	3.718	1.946	1.911	1.893	1.759	1.753	1.727	1.708	1.599	1.579	1.533	1.461	1.228	0.973	0.674	
125	-	-	-	-	2.016	1.980	1.963	1.828	1.822	1.796	1.777	1.667	1.647	1.600	1.528	1.294	1.007	0.688	
130	-	-	-	-	2.086	2.050	2.033	1.897	1.891	1.864	1.845	1.735	1.715	1.667	1.595	1.360	1.041	0.702	
135	-	-	-	-	2.156	2.120	2.102	1.966	1.959	1.933	1.914	1.803	1.782	1.734	1.662	1.426	1.076	0.716	
140	-	-	-	-	2.226	2.189	2.172	2.035	2.028	2.002	1.983	1.870	1.850	1.802	1.729	1.492	1.110	0.730	
145	-	-	-	-	2.296	2.259	2.241	2.104	2.097	2.071	2.051	1.938	1.918	1.869	1.796	1.558	1.144	0.744	
150	-	-	-	-	2.366	2.329	2.311	2.172	2.166	2.139	2.120	2.006	1.985	1.936	1.863	1.624	1.178	0.758	
155	-	-	-	-	2.436	2.398	2.380	2.241	2.235	2.208	2.188	2.074	2.053	2.004	1.930	1.690	1.236	0.771	
160	-	-	-	-	2.602	2.468	2.450	2.310	2.304	2.277	2.257	2.142	2.121	2.071	1.997	1.756	1.300	0.785	
165	-	-	-	-	2.887	2.646	2.579	2.379	2.373	2.346	2.325	2.209	2.188	2.138	2.064	1.821	1.365	0.799	
170	-	-	-	-	3.172	2.834	2.740	2.448	2.441	2.414	2.394	2.277	2.256	2.206	2.131	1.887	1.429	0.813	
175	-	-	-	-	3.456	3.022	2.901	2.516	2.508	2.482	2.462	2.345	2.324	2.273	2.198	1.953	1.494	0.827	
180	-	-	-	-	3.741	3.210	3.062	2.583	2.573	2.539	2.519	2.413	2.392	2.340	2.265	2.019	1.558	1.117	
185	-	-	-	-	-	3.398	3.224	2.650	2.638	2.597	2.574	2.479	2.459	2.407	2.332	2.085	1.623	1.242	
190	-	-	-	-	-	3.586	3.385	2.717	2.703	2.655	2.629	2.534	2.516	2.465	2.399	2.151	1.687	1.312	
195	-	-	-	-	-	3.774	3.546	2.784	2.768	2.713	2.683	2.588	2.571	2.529	2.466	2.217	1.752	1.382	
200	-	-	-	-	-	3.708	2.851	2.833	2.817	2.770	2.738	2.642	2.625	2.583	2.522	2.283	1.816	1.452	
205	-	-	-	-	-	-	3.869	2.918	2.898	2.828	2.793	2.696	2.679	2.637	2.576	2.349	1.881	1.521	
210	-	-	-	-	-	-	-	2.985	2.963	2.886	2.847	2.751	2.733	2.691	2.630	2.415	1.945	1.591	
215	-	-	-	-	-	-	-	3.052	3.028	2.943	2.902	2.805	2.788	2.745	2.684	2.479	2.010	1.661	
220	-	-	-	-	-	-	-	3.119	3.093	3.001	2.957	2.859	2.842	2.800	2.738	2.534	2.074	1.731	
225	-	-	-	-	-	-	-	3.186	3.158	3.059	3.011	2.913	2.896	2.854	2.792	2.589	2.138	1.801	
230	-	-	-	-	-	-	-	3.253	3.223	3.117	3.066	2.968	2.950	2.908	2.846	2.643	2.203	1.871	
235	-	-	-	-	-	-	-	3.320	3.287	3.174	3.121	3.022	3.005	2.962	2.900	2.698	2.267	1.941	
240	-	-	-	-	-	-	-	3.387	3.352	3.232	3.175	3.076	3.059	3.016	2.954	2.752	2.332	2.011	
245	-	-	-	-	-	-	-	3.454	3.417	3.290	3.230	3.130	3.113	3.070	3.009	2.807	2.396	2.081	
250	-	-	-	-	-	-	-	3.521	3.482	3.347	3.284	3.185	3.167	3.125	3.063	2.861	2.461	2.151	
255	-	-	-	-	-	-	-	3.588	3.547	3.405	3.339	3.239	3.222	3.179	3.117	2.916	2.518	2.220	
260	-	-	-	-	-	-	-	3.656	3.612	3.463	3.394	3.293	3.276	3.233	3.171	2.970	2.574	2.290	
265	-	-	-	-	-	-	-	3.723	3.677	3.521	3.448	3.347	3.330	3.287	3.225	3.025	2.629	2.360	
270	-	-	-	-	-	-	-	3.790	3.742	3.578	3.503	3.402	3.384	3.341	3.279	3.079	2.684	2.430	
275	-	-	-	-	-	-	-	3.857	3.807	3.636	3.558	3.456	3.439	3.396	3.333	3.134	2.740	2.491	
280	-	-	-	-	-	-	-	3.924	3.872	3.694	3.612	3.510	3.493	3.450	3.387	3.188	2.795	2.536	
285	-	-	-	-	-	-	-	-	3.937	3.752	3.667	3.564	3.547	3.504	3.441	3.243	2.851	2.581	
290	-	-	-	-	-	-	-	-	-	3.809	3.722	3.619	3.601	3.558	3.495	3.298	2.906	2.626	
295	-	-	-	-	-	-	-	-	-	3.867	3.776	3.673	3.656	3.612	3.549	3.352	2.962	2.671	
300	-	-	-	-	-	-	-	-	-	3.925	3.831	3.727	3.710	3.666	3.604	3.407	3.017	2.717	
305	-	-	-	-	-	-	-	-	-	3.885	3.781	3.721	3.704	3.660	3.598	3.401	3.011	2.762	
310	-	-	-	-	-	-	-	-	-	3.940	3.836	3.818	3.775	3.712	3.650	3.453	3.063	2.814	
315	-	-	-	-	-	-	-	-	-	-	3.890	3.873	3.829	3.766	3.704	3.507	3.117	2.868	
320	-	-	-	-	-	-	-	-	-	-	3.944	3.927	3.883	3.820	3.758	3.561	3.171	2.922	
325	-	-	-	-	-	-	-	-	-	-	-	-	3.937	3.874	3.812	3.615	3.225	2.976	
330	-	-	-	-	-	-	-	-	-	-	-	-	-	3.928	3.866	3.669	3.279	3.030	
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.919	3.722	3.332	3.083	
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.910	3.713	3.323	
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.901	3.704	3.314	

Table applies to beams with protection to three sides and a concrete slab. Thickness is intumescent only.




FIRETEX FX1003/FX2003																		
Section Factor up to m ²	Table A9: I-Section Beams: Fire Resistance Period: 120 Minutes																	
	Thickness (mm) Required for a Design Temperature of																	
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C	750°C
30	3.379	2.576	1.308	0.918	0.753	0.733	0.724	0.613	0.610	0.599	0.590	0.543	0.536	0.523	0.506	0.458	0.384	0.313
35	-	2.965	2.008	1.101	0.873	0.846	0.832	0.733	0.729	0.713	0.701	0.639	0.630	0.610	0.584	0.529	0.446	0.371
40	-	3.354	2.567	1.347	1.011	0.980	0.965	0.854	0.849	0.827	0.813	0.736	0.724	0.697	0.663	0.586	0.508	0.430
45	-	-	2.846	1.646	1.148	1.114	1.097	0.977	0.972	0.949	0.933	0.833	0.818	0.785	0.741	0.642	0.547	0.489
50	-	-	3.125	1.945	1.276	1.276	1.249	1.100	1.095	1.070	1.054	0.954	0.935	0.889	0.820	0.699	0.578	0.545
55	-	-	3.404	2.244	1.471	1.471	1.439	1.233	1.225	1.193	1.175	1.074	1.056	1.011	0.940	0.756	0.609	0.599
60	-	-	3.684	2.538	1.666	1.666	1.629	1.388	1.379	1.340	1.317	1.191	1.176	1.133	1.064	0.812	0.652	0.652
65	-	-	-	2.814	1.861	1.861	1.819	1.544	1.532	1.487	1.460	1.262	1.251	1.226	1.188	0.933	0.705	0.705
70	-	-	-	3.089	2.057	2.057	2.010	1.699	1.686	1.634	1.603	1.332	1.321	1.295	1.257	1.082	0.759	0.759
75	-	-	-	3.365	2.252	2.252	2.200	1.855	1.839	1.782	1.746	1.403	1.391	1.365	1.326	1.206	0.812	0.812
80	-	-	-	3.640	2.447	2.447	2.390	2.010	1.993	1.929	1.889	1.473	1.462	1.435	1.394	1.272	0.866	0.866
85	-	-	-	-	2.642	2.642	2.580	2.166	2.146	2.076	2.032	1.544	1.532	1.504	1.463	1.339	0.919	0.919
90	-	-	-	-	2.838	2.838	2.771	2.321	2.300	2.223	2.175	1.614	1.602	1.574	1.532	1.405	0.972	0.972
95	-	-	-	-	3.033	3.033	2.961	2.477	2.453	2.370	2.318	1.685	1.672	1.643	1.601	1.471	1.219	1.026
100	-	-	-	-	3.228	3.228	3.151	2.632	2.607	2.517	2.461	1.755	1.743	1.713	1.670	1.538	1.281	1.079
105	-	-	-	-	3.506	3.423	3.342	2.788	2.760	2.664	2.604	1.826	1.813	1.783	1.739	1.604	1.343	1.132
110	-	-	-	-	-	3.619	3.532	2.943	2.914	2.811	2.747	1.896	1.883	1.852	1.808	1.671	1.405	1.186
115	-	-	-	-	-	3.814	3.722	3.099	3.067	2.958	2.890	1.967	1.954	1.922	1.876	1.737	1.468	1.237
120	-	-	-	-	-	-	-	3.254	3.221	3.105	3.033	2.037	2.024	1.992	1.945	1.803	1.530	1.289
125	-	-	-	-	-	-	-	3.410	3.374	3.252	3.176	2.108	2.094	2.061	2.014	1.870	1.592	1.341
130	-	-	-	-	-	-	-	3.565	3.528	3.399	3.319	2.178	2.164	2.131	2.083	1.936	1.654	1.393
135	-	-	-	-	-	-	-	3.721	3.681	3.546	3.462	2.249	2.235	2.201	2.152	2.002	1.717	1.445
140	-	-	-	-	-	-	-	3.876	3.835	3.693	3.605	2.319	2.305	2.270	2.221	2.069	1.779	1.496
145	-	-	-	-	-	-	-	-	3.840	3.749	3.659	2.390	2.375	2.340	2.290	2.135	1.841	1.548
150	-	-	-	-	-	-	-	-	-	3.892	3.792	2.460	2.445	2.410	2.358	2.202	1.903	1.600
155	-	-	-	-	-	-	-	-	-	-	3.905	2.514	2.493	2.457	2.405	2.248	1.946	1.652
160	-	-	-	-	-	-	-	-	-	-	3.942	2.570	2.549	2.513	2.461	2.294	1.989	1.704
165	-	-	-	-	-	-	-	-	-	-	-	3.527	3.008	2.987	2.941	2.774	2.469	2.185
170	-	-	-	-	-	-	-	-	-	-	-	-	3.266	2.852	2.827	2.660	2.355	2.071
175	-	-	-	-	-	-	-	-	-	-	-	-	-	3.523	3.014	2.989	2.822	2.517
180	-	-	-	-	-	-	-	-	-	-	-	-	-	3.781	3.177	3.152	2.985	2.680
185	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.340	2.925	2.899	2.732
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.503	3.088	3.062	2.895
195	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.666	3.253	3.227	3.060
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.828	3.440	3.414	3.247
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.912	2.570	2.270
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.976	2.622	2.322
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.039	2.675	2.375
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.103	2.727	2.427
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.167	2.779	2.479
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.230	2.831	2.531
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.294	2.884	2.584
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.357	2.936	2.636
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.421	2.988	2.688
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.484	3.041	2.741
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.548	3.093	2.793
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.612	3.145	2.846
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.675	3.198	2.899
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.739	3.250	2.952
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.802	3.302	3.006
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.866	3.355	3.059
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.929	3.407	3.112
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.459	3.065
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.512	3.118
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.564	3.171
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.616	3.224
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.669	3.277
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.721	3.331
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.773	3.384
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.826	3.437
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.878	3.490
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.930	3.543
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.596
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.649

Table applies to beams with protection to three sides and a concrete slab. Thickness is intumescent only.



FIRETEX FX1003/FX2003																		
Section Factor up to m ²	Table A10: I-Section Beams: Fire Resistance Period: 150 Minutes																	
	Thickness (mm) Required for a Design Temperature of																	
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C	750°C
30	-	-	2.936	2.350	1.276	1.198	1.178	1.082	1.078	1.061	1.054	0.987	0.975	0.948	0.907	0.782	0.574	0.503
35	-	-	3.355	2.746	1.849	1.716	1.656	1.333	1.323	1.283	1.259	1.160	1.148	1.118	1.076	0.940	0.686	0.571
40	-	-	-	3.070	2.422	2.234	2.146	1.654	1.637	1.572	1.535	1.372	1.350	1.304	1.248	1.111	0.799	0.633
45	-	-	-	3.394	2.747	2.635	2.574	1.975	1.950	1.862	1.811	1.591	1.562	1.499	1.426	1.263	0.981	0.694
50	-	-	-	3.717	3.048	2.935	2.877	2.296	2.264	2.151	2.087	1.810	1.773	1.695	1.604	1.400	1.188	0.756
55	-	-	-	-	3.348	3.236	3.179	2.630	2.591	2.441	2.363	2.030	1.984	1.891	1.782	1.538	1.284	0.818
60	-	-	-	-	3.649	3.536	3.481	2.980	2.945	2.805	2.705	2.249	2.196	2.086	1.961	1.676	1.381	0.880
65	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
70	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
75	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
80	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
85	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
95	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
105	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
110	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
115	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
120	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
130	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
135	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
140	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
155	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
165	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
170	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
180	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
185	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
195	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to beams with protection to three sides and a concrete slab. Thickness is intumescent only.

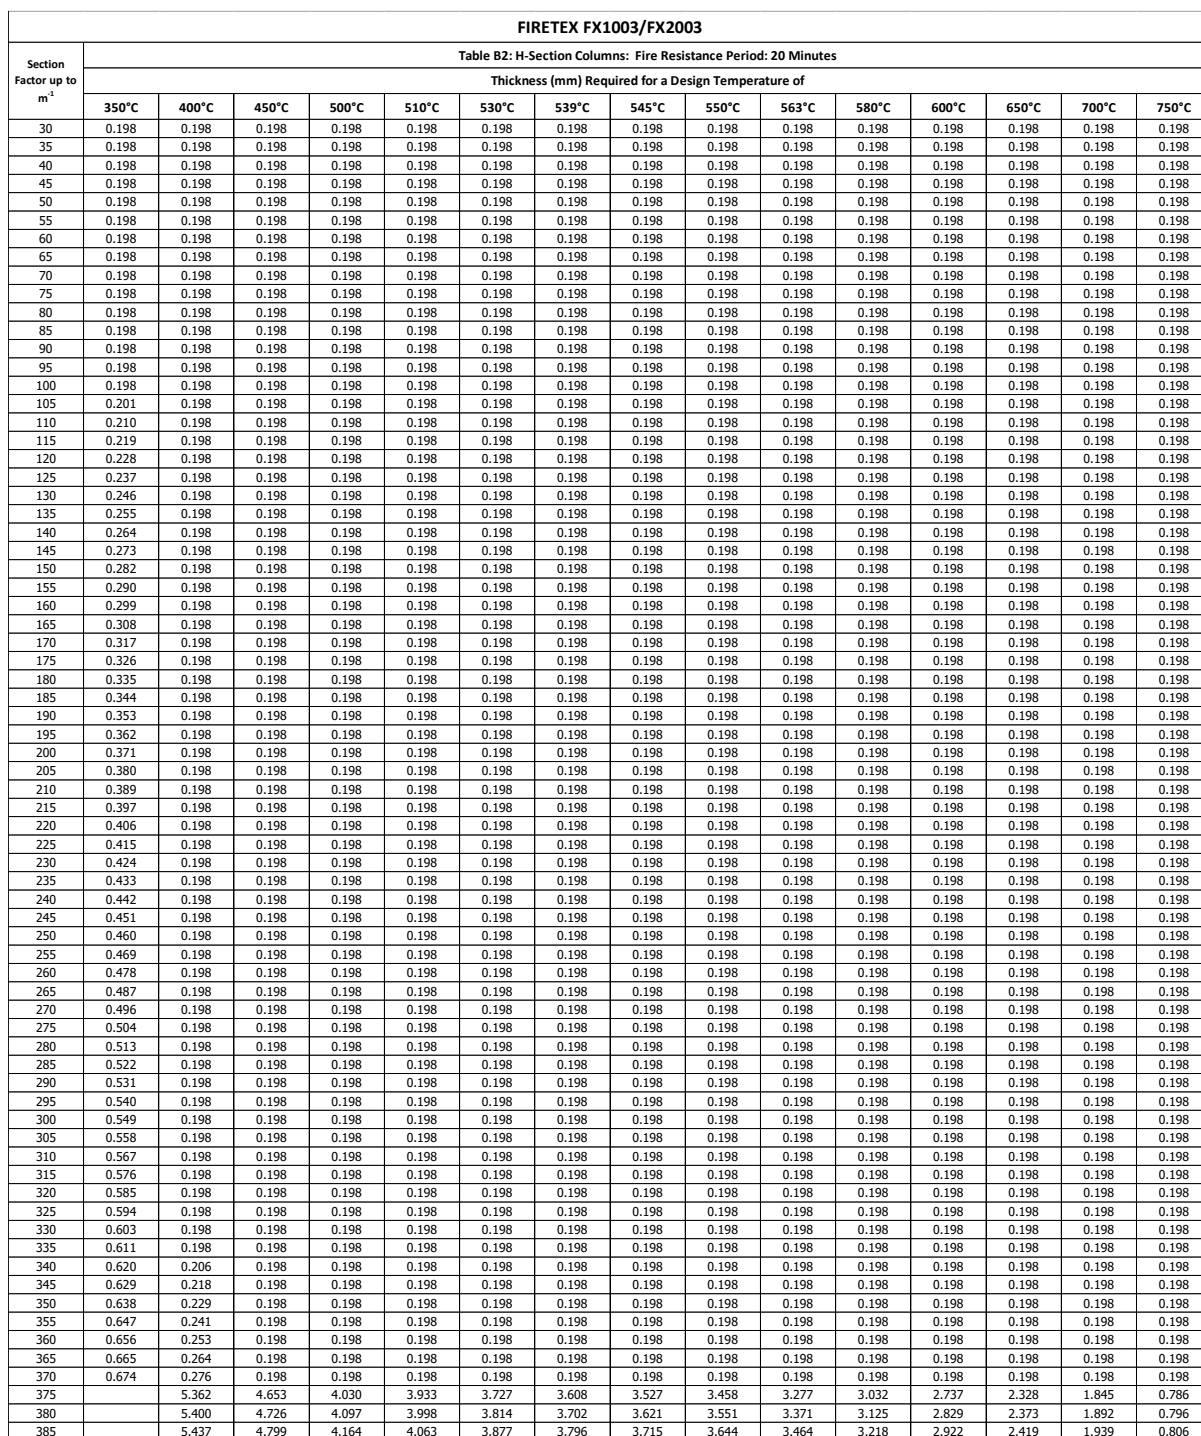

BS-RC-0034
Page 14 of 49



FIRETEX FX1003/FX2003														
Section Factor up to m ²	Table B8: H-Section Columns: Fire Resistance Period: 105 Minutes													
	Thickness (mm) Required for a Design Temperature of													
	350°C	400°C	450°C	500°C	510°C	530°C	539°C	545°C	550°C	563°C	580°C	600°C	650°C	700°C
30	2.613	1.391	0.881	0.667	0.631	0.562	0.532	0.512	0.495	0.453	0.399	0.273	0.198	0.198
35	3.060	1.762	1.100	0.789	0.746	0.665	0.630	0.607	0.587	0.538	0.475	0.349	0.263	0.217
40	3.481	2.134	1.290	0.913	0.861	0.768	0.728	0.701	0.679	0.623	0.551	0.424	0.310	0.245
45	3.869	2.505	1.470	1.038	0.973	0.867	0.825	0.796	0.771	0.708	0.628	0.500	0.357	0.274
50	4.155	2.880	1.651	1.167	1.086	0.961	0.911	0.881	0.857	0.792	0.704	0.575	0.403	0.303
55	4.441	3.258	1.831	1.347	1.221	1.055	0.998	0.964	0.936	0.869	0.781	0.651	0.450	0.331
60	4.727	3.636	2.012	1.526	1.388	1.148	1.084	1.046	1.015	0.941	0.851	0.726	0.496	0.360
65	5.013	3.852	2.192	1.706	1.556	1.289	1.179	1.128	1.094	1.013	0.916	0.802	0.543	0.389
70	5.299	3.946	2.373	1.885	1.723	1.433	1.312	1.240	1.183	1.085	0.981	0.865	0.589	0.417
75	-	4.040	2.553	2.065	1.891	1.576	1.444	1.365	1.302	1.157	1.046	0.924	0.636	0.446
80	-	4.134	2.816	2.245	2.059	1.720	1.577	1.490	1.421	1.224	1.111	0.984	0.683	0.475
85	-	4.228	3.411	2.424	2.226	1.863	1.709	1.616	1.540	1.292	1.176	1.043	0.729	0.503
90	-	4.322	3.814	2.604	2.394	2.007	1.842	1.741	1.659	1.359	1.240	1.103	0.776	0.532
95	-	4.416	3.858	2.783	2.561	2.150	1.974	1.866	1.778	1.426	1.305	1.162	0.822	0.561
100	-	4.510	3.902	2.963	2.729	2.294	2.107	1.992	1.898	1.494	1.370	1.225	0.867	0.589
105	-	4.604	3.946	3.143	2.896	2.438	2.239	2.117	2.017	1.561	1.435	1.287	0.912	0.618
110	-	4.698	3.991	3.322	3.064	2.581	2.372	2.242	2.136	1.628	1.500	1.349	0.956	0.646
115	-	4.792	4.035	3.502	3.231	2.725	2.504	2.368	2.255	1.695	1.565	1.412	1.001	0.675
120	-	4.886	4.079	3.681	3.399	2.868	2.637	2.493	2.374	1.763	1.630	1.474	1.046	0.704
125	-	4.980	4.123	3.811	3.566	3.012	2.769	2.618	2.493	1.830	1.695	1.536	1.090	0.732
130	-	5.074	4.167	3.847	3.734	3.156	2.901	2.744	2.612	1.897	1.760	1.599	1.135	0.761
135	-	5.167	4.211	3.882	3.821	3.299	3.034	2.869	2.731	1.965	1.825	1.661	1.187	0.790
140	-	5.261	4.256	3.918	3.857	3.443	3.166	2.994	2.851	2.032	1.890	1.723	1.245	0.818
145	-	5.355	4.300	3.954	3.893	3.586	3.299	3.120	2.970	2.099	1.955	1.786	1.302	0.924
150	-	5.449	4.344	3.990	3.929	3.730	3.431	3.245	3.089	2.166	2.020	1.848	1.360	1.030
155	-	5.543	4.388	4.025	3.965	3.818	3.564	3.370	3.208	2.234	2.085	1.910	1.418	1.136
160	-	-	4.432	4.061	4.001	3.856	3.696	3.496	3.327	2.301	2.150	1.973	1.475	1.194
165	-	-	4.477	4.097	4.037	3.894	3.807	3.621	3.446	2.368	2.215	2.035	1.533	1.242
170	-	-	4.521	4.133	4.074	3.931	3.846	3.746	3.565	2.436	2.280	2.097	1.591	1.290
175	-	-	4.565	4.168	4.110	3.969	3.885	3.822	3.684	2.503	2.344	2.159	1.648	1.338
180	-	-	4.609	4.204	4.146	4.007	3.924	3.862	3.800	2.570	2.409	2.222	1.706	1.386
185	-	-	4.653	4.240	4.182	4.044	3.963	3.902	3.841	2.637	2.474	2.284	1.764	1.434
190	-	-	4.698	4.275	4.218	4.082	4.002	3.941	3.882	2.747	2.539	2.346	1.821	1.482
195	-	-	4.742	4.311	4.254	4.120	4.041	3.981	3.923	3.260	2.604	2.409	1.879	1.530
200	-	-	4.786	4.347	4.291	4.158	4.080	4.021	3.964	3.773	2.669	2.471	1.937	1.578
205	-	-	4.830	4.383	4.327	4.195	4.119	4.061	4.005	3.840	2.796	2.533	1.994	1.626
210	-	-	4.874	4.418	4.363	4.233	4.158	4.101	4.046	3.884	2.974	2.596	2.052	1.674
215	-	-	4.918	4.454	4.399	4.271	4.197	4.141	4.087	3.928	3.152	2.658	2.110	1.722
220	-	-	4.963	4.490	4.435	4.308	4.236	4.181	4.128	3.972	3.330	2.728	2.168	1.770
225	-	-	5.007	4.526	4.471	4.346	4.275	4.221	4.169	4.017	3.508	2.811	2.225	1.818
230	-	-	5.051	4.561	4.507	4.384	4.314	4.261	4.210	4.061	3.686	2.894	2.283	1.867
235	-	-	5.095	4.597	4.544	4.422	4.353	4.301	4.251	4.105	3.817	2.978	2.341	1.915
240	-	-	5.139	4.633	4.580	4.459	4.392	4.341	4.292	4.149	3.868	3.061	2.398	1.963
245	-	-	5.184	4.669	4.616	4.497	4.431	4.381	4.333	4.193	3.919	3.144	2.456	2.011
250	-	-	5.228	4.704	4.652	4.535	4.470	4.420	4.374	4.237	3.969	3.228	2.514	2.059
255	-	-	5.272	4.740	4.688	4.572	4.509	4.460	4.415	4.281	4.020	3.311	2.571	2.107
260	-	-	5.316	4.776	4.724	4.610	4.548	4.500	4.456	4.325	4.071	3.394	2.629	2.155
265	-	-	5.360	4.812	4.761	4.648	4.587	4.540	4.497	4.369	4.122	3.477	2.687	2.203
270	-	-	5.405	4.847	4.797	4.686	4.626	4.580	4.538	4.413	4.173	3.561	2.767	2.251
275	-	-	5.449	4.883	4.833	4.723	4.665	4.620	4.579	4.457	4.223	3.644	2.854	2.299
280	-	-	5.493	4.919	4.869	4.761	4.704	4.660	4.620	4.502	4.274	3.727	2.941	2.347
285	-	-	5.537	4.955	4.905	4.799	4.743	4.700	4.661	4.546	4.325	3.809	3.027	2.395
290	-	-	-	4.990	4.941	4.837	4.782	4.740	4.702	4.590	4.376	3.877	3.114	2.443
295	-	-	-	5.026	4.977	4.874	4.821	4.780	4.743	4.634	4.427	3.946	3.201	2.491
300	-	-	-	5.062	5.014	4.912	4.860	4.820	4.784	4.678	4.477	4.015	3.287	2.539
305	-	-	-	5.098	5.050	4.950	4.899	4.860	4.825	4.722	4.528	4.084	3.374	2.587
310	-	-	-	5.133	5.086	4.987	4.937	4.899	4.866	4.766	4.579	4.152	3.461	2.635
315	-	-	-	5.169	5.122	5.025	4.976	4.939	4.907	4.810	4.630	4.221	3.547	2.683
320	-	-	-	5.205	5.158	5.063	5.015	4.979	4.948	4.854	4.681	4.290	3.634	2.782
325	-	-	-	5.241	5.194	5.101	5.054	5.019	4.989	4.898	4.731	4.358	3.721	2.905
330	-	-	-	5.276	5.230	5.138	5.093	5.059	5.030	4.942	4.782	4.427	3.806	3.027
335	-	-	-	5.312	5.267	5.176	5.132	5.099	5.071	4.986	4.833	4.496	3.882	3.149
340	-	-	-	5.348	5.303	5.214	5.171	5.139	5.112	5.031	4.884	4.565	3.958	3.272
345	-	-	-	5.384	5.339	5.251	5.210	5.179	5.153	5.075	4.935	4.633	4.034	3.394
350	-	-	-	5.419	5.375	5.289	5.249	5.219	5.194	5.119	4.985	4.702	4.111	3.517
355	-	-	-	5.455	5.411	5.327	5.288	5.259	5.235	5.163	5.036	4.771	4.187	3.639
360	-	-	-	5.491	5.447	5.365	5.327	5.299	5.276	5.207	5.087	4.840	4.263	3.762
365	-	-	-	5.527	5.484	5.402	5.366	5.339	5.317	5.251	5.138	4.908	4.339	3.847
370	-	-	-	-	5.520	5.440	5.405	5.378	5.358	5.295	5.188	4.977	4.415	3.916
375	-	-	-	-	-	5.478	5.444	5.418	5.399	5.339	5.239	5.046	4.491	3.986
380	-	-	-	-	-	5.515	5.483	5.458	5.440	5.383	5.290	5.115	4.567	4.055
385	-	-	-	-	-	5.553	5.522	5.498	5.481	5.427	5.341	5.183	4.643	4.124

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 4.249 mm.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table B9: H-Section Columns: Fire Resistance Period: 120 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	510°C	530°C	539°C	545°C	550°C	563°C	580°C	600°C	650°C	700°C	750°C
30	3.279	2.289	1.326	0.936	0.888	0.807	0.774	0.752	0.734	0.687	0.627	0.558	0.392	0.198	0.198
35	3.805	2.761	1.675	1.122	1.057	0.952	0.910	0.884	0.864	0.811	0.742	0.662	0.474	0.293	0.211
40	4.301	3.183	2.023	1.310	1.224	1.097	1.046	1.014	0.989	0.928	0.854	0.765	0.557	0.359	0.257
45	4.796	3.604	2.372	1.499	1.389	1.292	1.197	1.144	1.115	1.044	0.961	0.866	0.639	0.424	0.303
50	-	3.918	2.723	1.687	1.553	1.522	1.415	1.347	1.294	1.165	1.067	0.966	0.722	0.489	0.349
55	-	4.142	3.107	1.875	1.751	1.751	1.632	1.557	1.497	1.353	1.186	1.065	0.804	0.555	0.395
60	-	4.365	3.492	2.064	1.980	1.980	1.850	1.767	1.700	1.541	1.355	1.169	0.888	0.620	0.441
65	-	4.588	3.818	2.252	2.209	2.209	2.068	1.977	1.903	1.729	1.524	1.316	0.972	0.685	0.487
70	-	4.811	3.917	2.440	2.438	2.438	2.285	2.187	2.106	1.917	1.694	1.462	1.056	0.751	0.533
75	-	5.034	4.015	2.668	2.668	2.668	2.503	2.397	2.309	2.105	1.863	1.609	1.139	0.816	0.579
80	-	5.257	4.113	3.146	2.897	2.897	2.720	2.607	2.512	2.293	2.032	1.756	1.206	0.895	0.626
85	-	5.480	4.211	3.803	3.126	3.126	2.938	2.817	2.715	2.481	2.202	1.903	1.268	0.974	0.672
90	-	5.704	4.310	3.857	3.805	3.355	3.156	3.027	2.918	2.669	2.371	2.050	1.330	1.054	0.718
95	-	-	4.408	3.911	3.852	3.585	3.373	3.237	3.121	2.857	2.540	2.196	1.393	1.133	0.764
100	-	-	4.506	3.965	3.900	3.801	3.591	3.447	3.324	3.045	2.710	2.343	1.455	1.194	0.810
105	-	-	4.604	4.019	3.947	3.838	3.800	3.657	3.527	3.233	2.879	2.490	1.518	1.247	0.897
110	-	-	4.702	4.073	3.995	3.874	3.836	3.810	3.730	3.421	3.048	2.637	1.580	1.301	0.994
115	-	-	4.801	4.127	4.043	3.911	3.873	3.847	3.823	3.609	3.218	2.784	1.642	1.355	1.091
120	-	-	4.899	4.181	4.090	3.948	3.909	3.883	3.859	3.797	3.387	2.930	1.705	1.409	1.170
125	-	-	4.997	4.235	4.138	3.985	3.946	3.920	3.896	3.835	3.556	3.077	1.767	1.462	1.217
130	-	-	5.095	4.289	4.185	4.022	3.982	3.956	3.933	3.872	3.726	3.224	1.830	1.516	1.263
135	-	-	5.194	4.343	4.233	4.059	4.019	3.993	3.969	3.909	3.820	3.371	1.892	1.570	1.309
140	-	-	5.292	4.397	4.281	4.095	4.055	4.029	4.006	3.946	3.857	3.518	1.954	1.623	1.355
145	-	-	5.390	4.451	4.328	4.132	4.092	4.066	4.043	3.983	3.895	3.664	2.017	1.677	1.401
150	-	-	5.488	4.505	4.376	4.169	4.128	4.102	4.080	4.020	3.933	3.802	2.079	1.731	1.447
155	-	-	-	4.559	4.423	4.206	4.164	4.139	4.116	4.057	3.970	3.841	2.142	1.784	1.493
160	-	-	-	4.613	4.471	4.243	4.201	4.175	4.153	4.094	4.008	3.879	2.204	1.838	1.540
165	-	-	-	4.667	4.519	4.279	4.237	4.212	4.190	4.131	4.045	3.918	2.266	1.892	1.586
170	-	-	-	4.721	4.566	4.316	4.274	4.249	4.226	4.168	4.083	3.957	2.329	1.946	1.632
175	-	-	-	4.775	4.614	4.353	4.310	4.285	4.263	4.205	4.120	3.996	2.391	1.999	1.678
180	-	-	-	4.829	4.662	4.390	4.347	4.322	4.300	4.242	4.158	4.035	2.454	2.053	1.724
185	-	-	-	4.883	4.709	4.427	4.383	4.358	4.336	4.279	4.196	4.074	2.516	2.107	1.770
190	-	-	-	4.937	4.757	4.464	4.419	4.395	4.373	4.316	4.233	4.113	2.578	2.160	1.816
195	-	-	-	4.991	4.804	4.500	4.456	4.431	4.410	4.353	4.271	4.152	2.641	2.214	1.863
200	-	-	-	5.045	4.852	4.537	4.492	4.468	4.446	4.390	4.308	4.190	2.726	2.268	1.909
205	-	-	-	5.099	4.900	4.574	4.529	4.504	4.483	4.427	4.346	4.229	3.088	2.322	1.955
210	-	-	-	5.153	4.947	4.611	4.565	4.541	4.520	4.464	4.384	4.268	3.449	2.375	2.001
215	-	-	-	5.207	4.995	4.648	4.602	4.577	4.557	4.501	4.421	4.307	3.800	2.429	2.047
220	-	-	-	5.261	5.042	4.684	4.638	4.614	4.593	4.538	4.459	4.346	3.848	2.483	2.093
225	-	-	-	5.315	5.090	4.721	4.675	4.650	4.630	4.575	4.496	4.385	3.896	2.536	2.140
230	-	-	-	5.369	5.138	4.758	4.711	4.687	4.667	4.612	4.534	4.424	3.944	2.590	2.186
235	-	-	-	5.423	5.185	4.795	4.747	4.723	4.703	4.649	4.572	4.463	3.992	2.644	2.232
240	-	-	-	5.477	5.233	4.832	4.784	4.760	4.740	4.686	4.609	4.501	4.040	2.697	2.278
245	-	-	-	5.531	5.281	4.869	4.820	4.796	4.777	4.723	4.647	4.540	4.088	2.774	2.324
250	-	-	-	-	5.328	4.905	4.857	4.833	4.813	4.760	4.684	4.579	4.136	2.851	2.370
255	-	-	-	-	5.376	4.942	4.893	4.869	4.850	4.797	4.722	4.618	4.184	2.928	2.416
260	-	-	-	-	5.423	4.979	4.930	4.906	4.887	4.834	4.759	4.657	4.232	3.005	2.463
265	-	-	-	-	5.471	5.016	4.966	4.942	4.923	4.871	4.797	4.696	4.280	3.082	2.509
270	-	-	-	-	5.519	5.053	5.002	4.979	4.960	4.908	4.835	4.735	4.327	3.159	2.555
275	-	-	-	-	5.566	5.089	5.039	5.015	4.997	4.945	4.872	4.774	4.375	3.236	2.601
280	-	-	-	-	-	5.126	5.075	5.052	5.034	4.982	4.910	4.812	4.423	3.313	2.647
285	-	-	-	-	-	5.163	5.112	5.088	5.070	5.019	4.947	4.851	4.471	3.390	2.693
290	-	-	-	-	-	5.200	5.148	5.125	5.107	5.056	4.985	4.890	4.519	3.467	2.787
295	-	-	-	-	-	5.237	5.185	5.161	5.144	5.093	5.023	4.929	4.567	3.544	2.887
300	-	-	-	-	-	5.274	5.221	5.198	5.180	5.130	5.060	4.968	4.615	3.621	2.986
305	-	-	-	-	-	5.310	5.258	5.234	5.217	5.167	5.098	5.007	4.663	3.698	3.086
310	-	-	-	-	-	5.347	5.294	5.271	5.254	5.204	5.135	5.046	4.711	3.776	3.186
315	-	-	-	-	-	5.384	5.330	5.307	5.290	5.241	5.173	5.085	4.759	3.855	3.285
320	-	-	-	-	-	5.421	5.367	5.344	5.327	5.278	5.210	5.123	4.807	3.935	3.385
325	-	-	-	-	-	5.458	5.403	5.380	5.364	5.315	5.248	5.162	4.855	4.016	3.485
330	-	-	-	-	-	5.494	5.440	5.417	5.400	5.352	5.286	5.201	4.903	4.096	3.584
335	-	-	-	-	-	5.531	5.476	5.453	5.437	5.389	5.323	5.240	4.951	4.177	3.684
340	-	-	-	-	-	-	5.513	5.490	5.474	5.426	5.361	5.279	4.999	4.257	3.784
345	-	-	-	-	-	-	-	5.526	5.511	5.463	5.398	5.318	5.047	4.338	3.859
350	-	-	-	-	-	-	-	-	-	5.500	5.436	5.357	5.095	4.418	3.930
355	-	-	-	-	-	-	-	-	-	5.537	5.474	5.396	5.143	4.499	4.000
360	-	-	-	-	-	-	-	-	-	-	5.511	5.434	5.191	4.579	4.071
365	-	-	-	-	-	-	-	-	-	-	5.549	5.473	5.239	4.660	4.142
370	-	-	-	-	-	-	-	-	-	-	-	5.512	5.287	4.740	4.213
375	-	-	-	-	-	-	-	-	-	-	-	5.551	5.334	4.821	4.284
380	-	-	-	-	-	-	-	-	-	-	-	-	5.382	4.901	4.355
385	-	-	-	-	-	-	-	-	-	-	-	-	5.430	4.982	4.426

Table applies to columns with protection to all sides. Thickness is intumescent only.


Table also applies to beams protected on four sides up to a maximum protection thickness of 4.249 mm.




FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table B10: H-Section Columns: Fire Resistance Period: 150 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	510°C	530°C	539°C	545°C	550°C	563°C	580°C	600°C	650°C	700°C	750°C
30	4.954	3.558	2.826	2.015	1.863	1.470	1.374	1.316	1.271	1.168	1.089	1.003	0.797	0.590	0.312
35	-	4.188	3.258	2.451	2.277	1.877	1.751	1.674	1.612	1.471	1.321	1.187	0.958	0.717	0.438
40	-	4.843	3.689	2.867	2.691	2.284	2.128	2.032	1.953	1.774	1.578	1.398	1.122	0.852	0.563
45	-	-	4.106	3.255	3.078	2.690	2.504	2.390	2.295	2.077	1.835	1.608	1.343	1.024	0.688
50	-	-	4.519	3.644	3.465	3.082	2.890	2.753	2.636	2.380	2.092	1.819	1.577	1.197	0.814
55	-	-	4.932	3.946	3.829	3.473	3.286	3.152	3.027	2.683	2.349	2.030	1.812	1.372	1.144
60	-	-	5.345	4.191	4.049	3.828	3.681	3.551	3.430	3.101	2.605	2.241	2.047	1.548	1.284
65	-	-	-	4.436	4.269	4.002	3.909	3.854	3.810	3.525	3.012	2.452	2.281	1.723	1.417
70	-	-	-	4.680	4.488	4.176	4.066	4.000	3.947	3.839	3.504	2.662	2.516	1.899	1.550
75	-	-	-	4.925	4.708	4.351	4.223	4.145	4.085	3.955	3.837	3.241	2.751	2.075	1.684
80	-	-	-	5.170	4.928	4.525	4.380	4.291	4.222	4.070	3.932	3.810	2.985	2.250	1.817
85	-	-	-	5.415	5.147	4.700	4.537	4.437	4.359	4.186	4.027	3.892	3.220	2.426	1.951
90	-	-	-	5.660	5.367	4.874	4.694	4.583	4.496	4.301	4.123	3.973	3.455	2.601	2.084
95	-	-	-	-	5.587	5.049	4.851	4.729	4.634	4.416	4.218	4.054	3.689	2.777	2.218
100	-	-	-	-	-	5.223	5.008	4.874	4.771	4.532	4.313	4.136	3.826	2.953	2.351
105	-	-	-	-	-	5.398	5.165	5.020	4.908	4.647	4.408	4.217	3.877	3.128	2.485
110	-	-	-	-	-	5.572	5.322	5.166	5.046	4.763	4.504	4.298	3.929	3.304	2.618
115	-	-	-	-	-	-	5.479	5.312	5.183	4.878	4.599	4.379	3.981	3.479	2.752
120	-	-	-	-	-	-	5.636	5.457	5.320	4.994	4.694	4.461	4.032	3.655	2.885
125	-	-	-	-	-	-	-	5.603	5.457	5.109	4.790	4.542	4.084	3.805	3.018
130	-	-	-	-	-	-	-	-	5.595	5.224	4.885	4.623	4.135	3.844	3.152
135	-	-	-	-	-	-	-	-	-	5.340	4.980	4.704	4.187	3.883	3.285
140	-	-	-	-	-	-	-	-	-	5.455	5.075	4.786	4.238	3.921	3.419
145	-	-	-	-	-	-	-	-	-	5.571	5.171	4.867	4.290	3.960	3.552
150	-	-	-	-	-	-	-	-	-	-	5.266	4.948	4.341	3.999	3.686
155	-	-	-	-	-	-	-	-	-	-	5.361	5.030	4.393	4.038	3.804
160	-	-	-	-	-	-	-	-	-	-	5.457	5.111	4.444	4.076	3.843
165	-	-	-	-	-	-	-	-	-	-	5.552	5.192	4.496	4.115	3.882
170	-	-	-	-	-	-	-	-	-	-	5.647	5.273	4.547	4.154	3.921
175	-	-	-	-	-	-	-	-	-	-	-	5.355	4.599	4.192	3.960
180	-	-	-	-	-	-	-	-	-	-	-	5.436	4.651	4.231	3.999
185	-	-	-	-	-	-	-	-	-	-	-	5.517	4.702	4.270	4.037
190	-	-	-	-	-	-	-	-	-	-	-	5.598	4.754	4.308	4.076
195	-	-	-	-	-	-	-	-	-	-	-	-	4.805	4.347	4.115
200	-	-	-	-	-	-	-	-	-	-	-	-	4.857	4.386	4.154
205	-	-	-	-	-	-	-	-	-	-	-	-	4.908	4.424	4.193
210	-	-	-	-	-	-	-	-	-	-	-	-	4.960	4.463	4.231
215	-	-	-	-	-	-	-	-	-	-	-	-	5.011	4.502	4.270
220	-	-	-	-	-	-	-	-	-	-	-	-	5.063	4.540	4.309
225	-	-	-	-	-	-	-	-	-	-	-	-	5.114	4.579	4.348
230	-	-	-	-	-	-	-	-	-	-	-	-	5.166	4.618	4.387
235	-	-	-	-	-	-	-	-	-	-	-	-	5.217	4.656	4.426
240	-	-	-	-	-	-	-	-	-	-	-	-	5.269	4.695	4.464
245	-	-	-	-	-	-	-	-	-	-	-	-	5.321	4.734	4.503
250	-	-	-	-	-	-	-	-	-	-	-	-	5.372	4.772	4.542
255	-	-	-	-	-	-	-	-	-	-	-	-	5.424	4.811	4.581
260	-	-	-	-	-	-	-	-	-	-	-	-	5.475	4.850	4.620
265	-	-	-	-	-	-	-	-	-	-	-	-	5.527	4.888	4.659
270	-	-	-	-	-	-	-	-	-	-	-	-	-	4.927	4.697
275	-	-	-	-	-	-	-	-	-	-	-	-	-	4.966	4.736
280	-	-	-	-	-	-	-	-	-	-	-	-	-	5.004	4.775
285	-	-	-	-	-	-	-	-	-	-	-	-	-	5.043	4.814
290	-	-	-	-	-	-	-	-	-	-	-	-	-	5.082	4.853
295	-	-	-	-	-	-	-	-	-	-	-	-	-	5.121	4.892
300	-	-	-	-	-	-	-	-	-	-	-	-	-	5.159	4.930
305	-	-	-	-	-	-	-	-	-	-	-	-	-	5.198	4.969
310	-	-	-	-	-	-	-	-	-	-	-	-	-	5.237	5.008
315	-	-	-	-	-	-	-	-	-	-	-	-	-	5.275	5.047
320	-	-	-	-	-	-	-	-	-	-	-	-	-	5.314	5.086
325	-	-	-	-	-	-	-	-	-	-	-	-	-	5.353	5.124
330	-	-	-	-	-	-	-	-	-	-	-	-	-	5.391	5.163
335	-	-	-	-	-	-	-	-	-	-	-	-	-	5.430	5.202
340	-	-	-	-	-	-	-	-	-	-	-	-	-	5.469	5.241
345	-	-	-	-	-	-	-	-	-	-	-	-	-	5.507	5.280
350	-	-	-	-	-	-	-	-	-	-	-	-	-	5.546	5.319
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.357
360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.396
365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.435
370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.474
375	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.513
380	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.552
385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.590

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 4.249 mm.

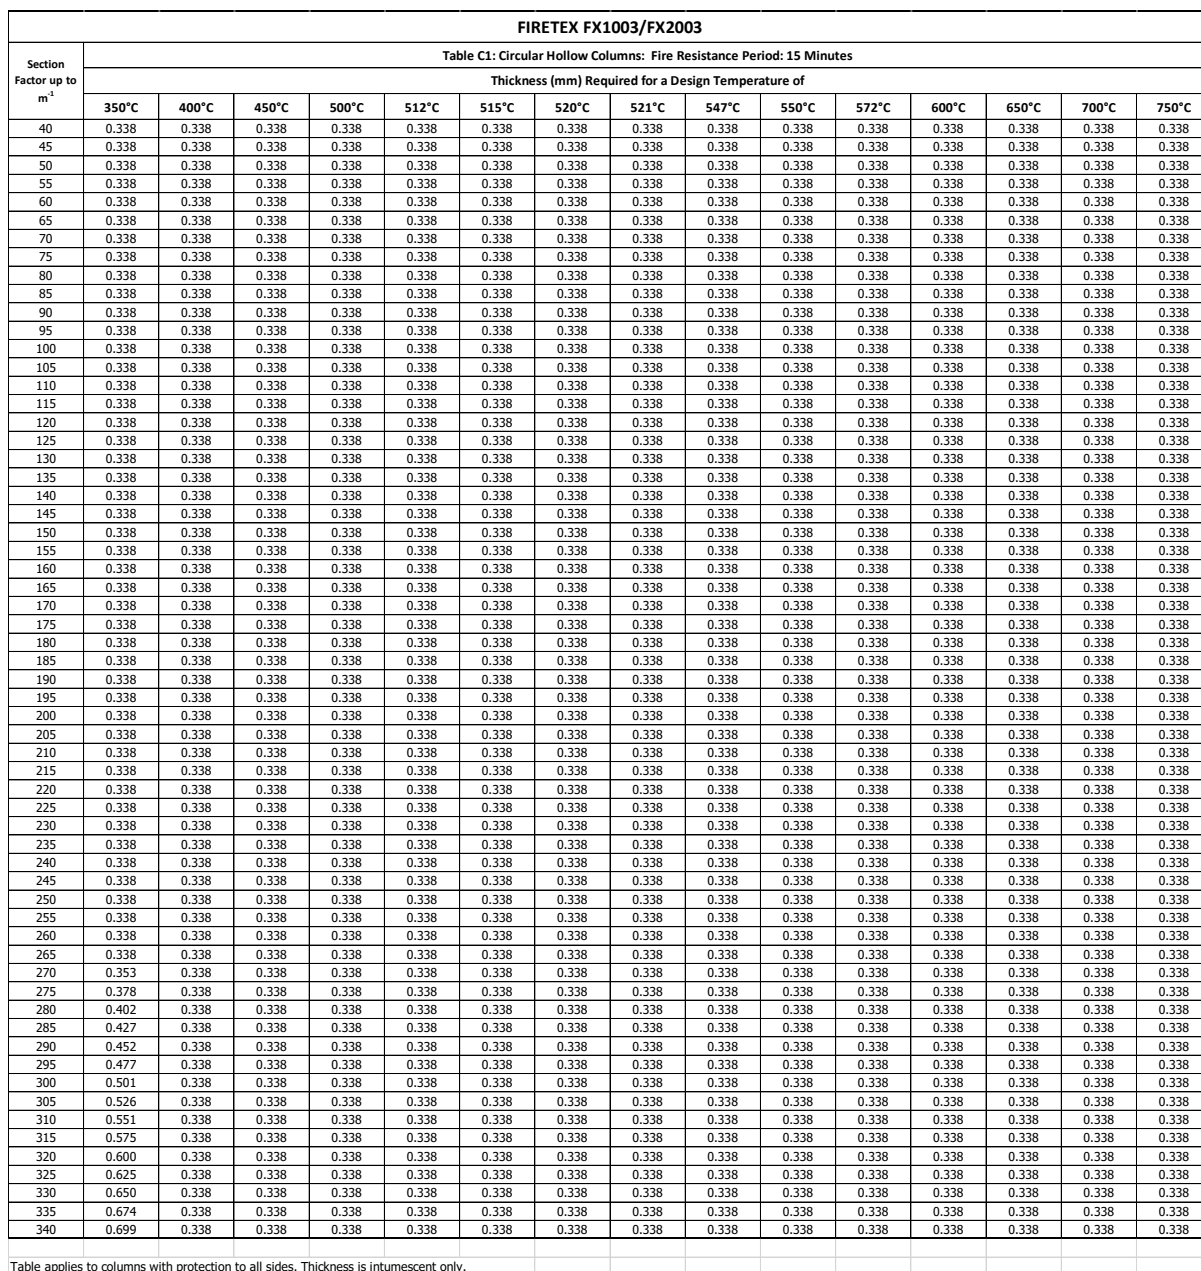

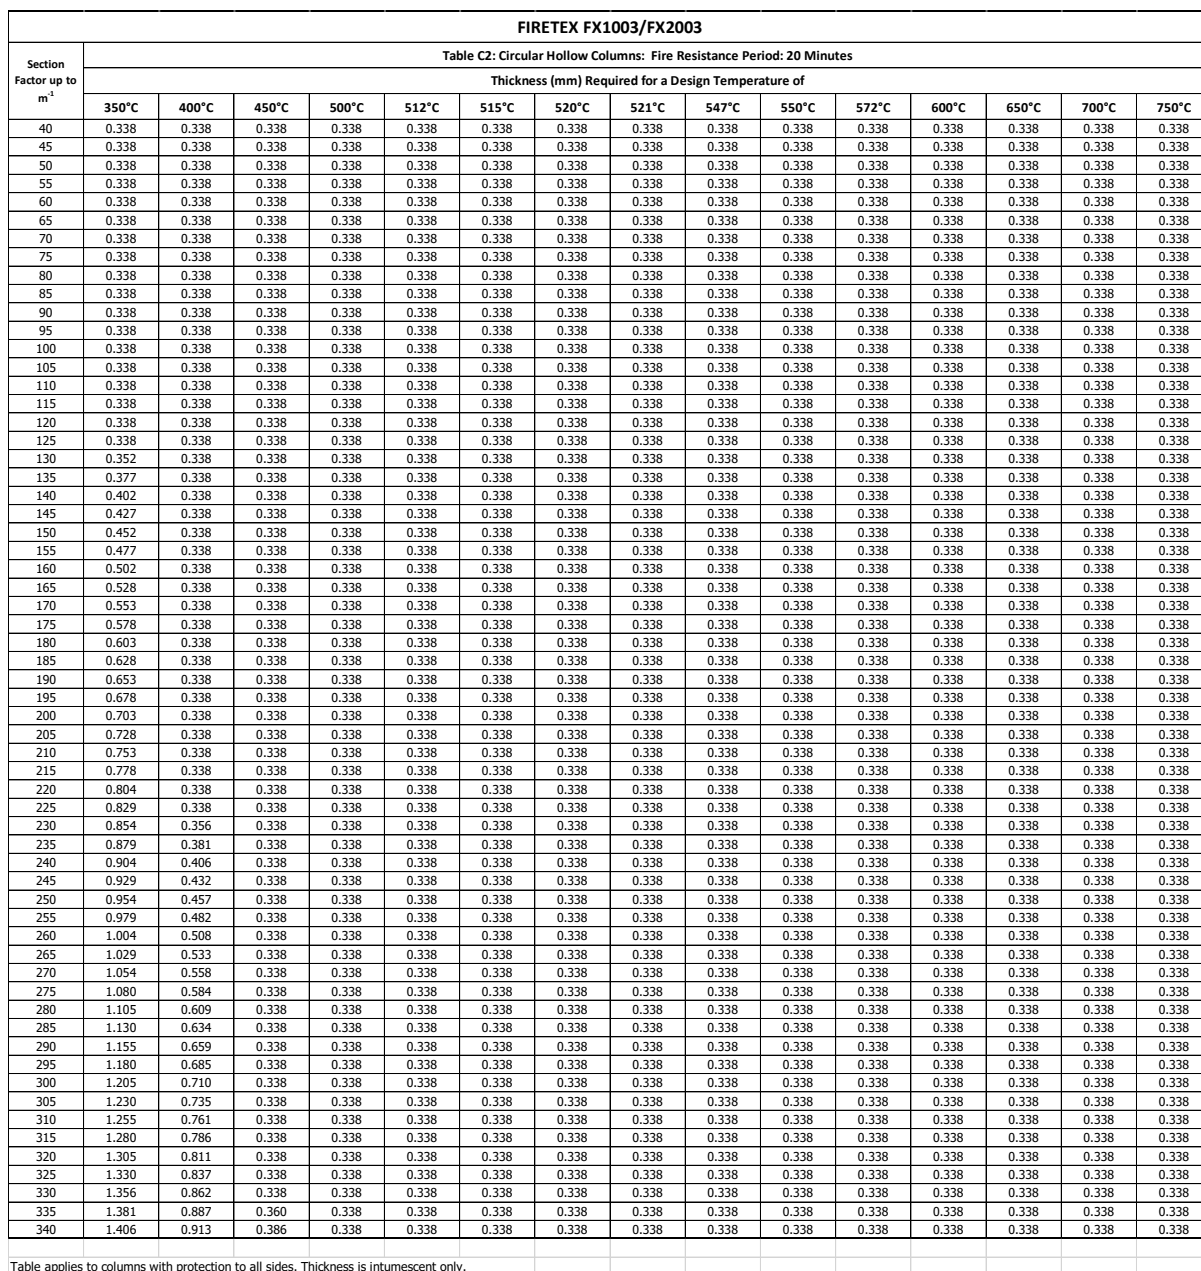



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C3: Circular Hollow Columns: Fire Resistance Period: 30 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
45	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
50	0.365	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
55	0.406	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
60	0.447	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
65	0.488	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
70	0.530	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
75	0.571	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
80	0.612	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
85	0.653	0.361	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
90	0.694	0.390	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
95	0.735	0.418	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
100	0.776	0.446	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
105	0.818	0.475	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
110	0.859	0.503	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
115	0.900	0.531	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
120	0.941	0.560	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
125	0.982	0.588	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
130	1.023	0.617	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
135	1.064	0.645	0.344	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
140	1.106	0.673	0.372	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
145	1.147	0.702	0.400	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
150	1.188	0.730	0.428	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
155	1.229	0.758	0.456	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
160	1.270	0.787	0.483	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
165	1.311	0.815	0.511	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
170	1.352	0.844	0.539	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
175	1.394	0.872	0.567	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
180	1.435	0.900	0.595	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
185	1.476	0.929	0.623	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
190	1.517	0.957	0.651	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
195	1.558	0.985	0.678	0.353	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
200	1.599	1.014	0.706	0.381	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
205	1.640	1.042	0.734	0.409	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
210	1.682	1.071	0.762	0.437	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
215	1.723	1.099	0.790	0.465	0.362	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
220	1.785	1.127	0.818	0.493	0.390	0.362	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
225	1.847	1.156	0.845	0.520	0.419	0.391	0.342	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
230	1.908	1.184	0.873	0.548	0.447	0.419	0.370	0.360	0.338	0.338	0.338	0.338	0.338	0.338	0.338
235	1.970	1.212	0.901	0.576	0.475	0.447	0.399	0.389	0.338	0.338	0.338	0.338	0.338	0.338	0.338
240	2.031	1.241	0.929	0.604	0.503	0.476	0.428	0.418	0.338	0.338	0.338	0.338	0.338	0.338	0.338
245	2.093	1.269	0.957	0.632	0.532	0.504	0.456	0.446	0.338	0.338	0.338	0.338	0.338	0.338	0.338
250	2.155	1.298	0.985	0.660	0.560	0.533	0.485	0.475	0.338	0.338	0.338	0.338	0.338	0.338	0.338
255	2.216	1.326	1.013	0.688	0.588	0.561	0.514	0.504	0.338	0.338	0.338	0.338	0.338	0.338	0.338
260	2.278	1.354	1.040	0.716	0.616	0.589	0.542	0.532	0.338	0.338	0.338	0.338	0.338	0.338	0.338
265	2.340	1.383	1.068	0.744	0.644	0.618	0.571	0.561	0.338	0.338	0.338	0.338	0.338	0.338	0.338
270	2.401	1.411	1.096	0.771	0.673	0.646	0.599	0.590	0.338	0.338	0.338	0.338	0.338	0.338	0.338
275	2.463	1.439	1.124	0.799	0.701	0.674	0.628	0.619	0.338	0.338	0.338	0.338	0.338	0.338	0.338
280	2.524	1.468	1.152	0.827	0.729	0.703	0.657	0.647	0.338	0.338	0.338	0.338	0.338	0.338	0.338
285	2.586	1.496	1.180	0.855	0.757	0.731	0.685	0.676	0.357	0.338	0.338	0.338	0.338	0.338	0.338
290	2.648	1.524	1.207	0.883	0.785	0.759	0.714	0.705	0.389	0.339	0.338	0.338	0.338	0.338	0.338
295	2.709	1.553	1.235	0.911	0.814	0.788	0.743	0.733	0.420	0.371	0.338	0.338	0.338	0.338	0.338
300	2.771	1.581	1.263	0.939	0.842	0.816	0.771	0.762	0.451	0.403	0.338	0.338	0.338	0.338	0.338
305	2.833	1.610	1.291	0.967	0.870	0.845	0.800	0.791	0.482	0.435	0.338	0.338	0.338	0.338	0.338
310	2.894	1.638	1.319	0.994	0.898	0.873	0.829	0.819	0.514	0.467	0.338	0.338	0.338	0.338	0.338
315	2.956	1.666	1.347	1.022	0.927	0.901	0.857	0.848	0.545	0.498	0.338	0.338	0.338	0.338	0.338
320	3.017	1.695	1.375	1.050	0.955	0.930	0.886	0.877	0.576	0.530	0.341	0.338	0.338	0.338	0.338
325	3.075	1.726	1.402	1.078	0.983	0.958	0.915	0.905	0.608	0.562	0.372	0.338	0.338	0.338	0.338
330	3.130	1.804	1.430	1.106	1.011	0.986	0.943	0.934	0.639	0.594	0.404	0.338	0.338	0.338	0.338
335	3.186	1.882	1.458	1.134	1.039	1.015	0.972	0.963	0.670	0.626	0.435	0.338	0.338	0.338	0.338
340	3.242	1.961	1.486	1.162	1.068	1.043	1.000	0.992	0.701	0.657	0.467	0.338	0.338	0.338	0.338

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C4: Circular Hollow Columns: Fire Resistance Period: 45 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	0.768	0.385	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
45	0.859	0.447	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
50	0.944	0.510	0.348	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
55	1.029	0.572	0.395	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
60	1.113	0.635	0.443	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
65	1.198	0.697	0.490	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
70	1.283	0.760	0.537	0.350	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
75	1.368	0.822	0.584	0.387	0.342	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
80	1.452	0.885	0.631	0.424	0.377	0.365	0.346	0.342	0.338	0.338	0.338	0.338	0.338	0.338	0.338
85	1.537	0.947	0.678	0.461	0.413	0.400	0.380	0.376	0.338	0.338	0.338	0.338	0.338	0.338	0.338
90	1.622	1.009	0.725	0.499	0.448	0.435	0.414	0.410	0.338	0.338	0.338	0.338	0.338	0.338	0.338
95	1.706	1.072	0.773	0.536	0.483	0.469	0.448	0.443	0.338	0.338	0.338	0.338	0.338	0.338	0.338
100	1.840	1.134	0.820	0.573	0.518	0.504	0.482	0.477	0.348	0.338	0.338	0.338	0.338	0.338	0.338
105	1.984	1.197	0.867	0.610	0.553	0.539	0.516	0.511	0.379	0.361	0.338	0.338	0.338	0.338	0.338
110	2.128	1.259	0.914	0.648	0.589	0.574	0.550	0.545	0.411	0.393	0.338	0.338	0.338	0.338	0.338
115	2.272	1.322	0.961	0.685	0.624	0.608	0.584	0.579	0.442	0.424	0.338	0.338	0.338	0.338	0.338
120	2.416	1.384	1.008	0.722	0.659	0.643	0.618	0.613	0.474	0.456	0.338	0.338	0.338	0.338	0.338
125	2.560	1.447	1.055	0.759	0.694	0.678	0.652	0.646	0.505	0.487	0.354	0.338	0.338	0.338	0.338
130	2.704	1.509	1.103	0.797	0.729	0.713	0.686	0.680	0.536	0.519	0.386	0.338	0.338	0.338	0.338
135	2.849	1.572	1.150	0.834	0.765	0.747	0.720	0.714	0.568	0.550	0.418	0.338	0.338	0.338	0.338
140	2.993	1.634	1.197	0.871	0.800	0.782	0.754	0.748	0.599	0.582	0.451	0.338	0.338	0.338	0.338
145	3.074	1.696	1.244	0.908	0.835	0.817	0.788	0.782	0.631	0.613	0.483	0.350	0.338	0.338	0.338
150	3.130	1.781	1.291	0.946	0.870	0.852	0.822	0.816	0.662	0.645	0.515	0.382	0.338	0.338	0.338
155	3.187	1.882	1.338	0.983	0.905	0.886	0.856	0.850	0.694	0.676	0.547	0.413	0.338	0.338	0.338
160	3.243	1.982	1.385	1.020	0.941	0.921	0.890	0.883	0.725	0.708	0.579	0.445	0.338	0.338	0.338
165	3.299	2.082	1.433	1.057	0.976	0.956	0.924	0.917	0.756	0.739	0.611	0.476	0.338	0.338	0.338
170	3.356	2.182	1.480	1.095	1.011	0.991	0.958	0.951	0.788	0.771	0.643	0.508	0.338	0.338	0.338
175	3.412	2.282	1.527	1.132	1.046	1.025	0.992	0.985	0.819	0.802	0.675	0.539	0.338	0.338	0.338
180	3.468	2.383	1.574	1.169	1.081	1.060	1.026	1.019	0.851	0.834	0.707	0.571	0.338	0.338	0.338
185	3.525	2.483	1.621	1.206	1.117	1.095	1.060	1.053	0.882	0.865	0.739	0.602	0.338	0.338	0.338
190	3.581	2.583	1.668	1.244	1.152	1.130	1.094	1.086	0.913	0.897	0.771	0.634	0.338	0.338	0.338
195	3.637	2.683	1.715	1.281	1.187	1.164	1.128	1.120	0.945	0.928	0.803	0.666	0.361	0.338	0.338
200	3.694	2.783	1.776	1.318	1.222	1.199	1.162	1.154	0.976	0.960	0.835	0.697	0.393	0.338	0.338
205	3.750	2.884	1.838	1.355	1.257	1.234	1.196	1.188	1.008	0.991	0.867	0.729	0.424	0.338	0.338
210	3.806	2.984	1.900	1.393	1.293	1.269	1.230	1.222	1.039	1.023	0.900	0.760	0.456	0.338	0.338
215	3.863	3.054	1.963	1.430	1.328	1.303	1.264	1.256	1.071	1.054	0.932	0.792	0.488	0.338	0.338
220	3.919	3.096	2.025	1.467	1.363	1.338	1.298	1.289	1.102	1.086	0.964	0.823	0.519	0.338	0.338
225	3.976	3.138	2.088	1.504	1.398	1.373	1.332	1.323	1.133	1.117	0.996	0.855	0.551	0.338	0.338
230	4.032	3.179	2.150	1.542	1.433	1.408	1.366	1.357	1.165	1.149	1.028	0.886	0.583	0.338	0.338
235	4.088	3.221	2.212	1.579	1.469	1.442	1.400	1.391	1.196	1.180	1.060	0.918	0.614	0.338	0.338
240	4.143	3.263	2.275	1.616	1.504	1.477	1.434	1.425	1.228	1.212	1.092	0.949	0.646	0.338	0.338
245	4.198	3.304	2.337	1.653	1.539	1.512	1.468	1.459	1.259	1.243	1.124	0.981	0.678	0.338	0.338
250	4.253	3.346	2.399	1.691	1.574	1.547	1.502	1.493	1.291	1.275	1.156	1.013	0.709	0.338	0.338
255	4.308	3.388	2.462	1.734	1.609	1.581	1.536	1.526	1.322	1.306	1.188	1.044	0.741	0.338	0.338
260	4.363	3.429	2.524	1.806	1.645	1.616	1.570	1.560	1.353	1.338	1.220	1.076	0.772	0.338	0.338
265	4.418	3.471	2.586	1.878	1.680	1.651	1.604	1.594	1.385	1.369	1.252	1.107	0.804	0.362	0.338
270	4.473	3.513	2.649	1.950	1.715	1.686	1.638	1.628	1.416	1.401	1.284	1.139	0.836	0.395	0.338
275	4.527	3.554	2.711	2.022	1.785	1.721	1.672	1.662	1.448	1.432	1.316	1.170	0.867	0.429	0.338
280	4.582	3.596	2.773	2.095	1.864	1.799	1.706	1.696	1.479	1.464	1.348	1.202	0.899	0.462	0.338
285	4.637	3.638	2.836	2.167	1.943	1.880	1.766	1.741	1.511	1.495	1.381	1.233	0.931	0.495	0.338
290	4.692	3.679	2.898	2.239	2.022	1.960	1.849	1.825	1.542	1.527	1.413	1.265	0.962	0.528	0.338
295	4.747	3.721	2.960	2.311	2.100	2.041	1.933	1.910	1.573	1.558	1.445	1.296	0.994	0.562	0.338
300	4.802	3.763	3.023	2.383	2.179	2.121	2.017	1.994	1.605	1.590	1.477	1.328	1.026	0.595	0.338
305	4.857	3.804	3.087	2.455	2.258	2.202	2.100	2.078	1.636	1.621	1.509	1.360	1.057	0.628	0.338
310	4.912	3.846	3.152	2.527	2.337	2.282	2.184	2.162	1.668	1.653	1.541	1.391	1.089	0.661	0.338
315	4.967	3.888	3.217	2.599	2.415	2.363	2.267	2.247	1.699	1.684	1.573	1.423	1.121	0.694	0.338
320	5.022	3.929	3.282	2.672	2.494	2.443	2.351	2.331	1.750	1.716	1.605	1.454	1.152	0.728	0.338
325	5.077	3.971	3.346	2.744	2.573	2.524	2.435	2.415	1.849	1.802	1.637	1.486	1.184	0.761	0.338
330	5.132	4.013	3.411	2.816	2.652	2.604	2.518	2.499	1.949	1.901	1.669	1.517	1.216	0.794	0.338
335	5.187	4.054	3.476	2.888	2.730	2.684	2.602	2.584	2.049	2.000	1.701	1.549	1.247	0.827	0.345
340	5.242	4.116	3.541	2.960	2.809	2.765	2.685	2.668	2.149	2.099	1.756	1.580	1.279	0.861	0.376

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C5: Circular Hollow Columns: Fire Resistance Period: 60 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	1.368	0.881	0.584	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338	0.338
45	1.414	0.971	0.660	0.430	0.400	0.392	0.382	0.379	0.338	0.338	0.338	0.338	0.338	0.338	0.338
50	1.544	1.072	0.737	0.493	0.460	0.452	0.440	0.437	0.372	0.365	0.338	0.338	0.338	0.338	0.338
55	1.674	1.174	0.814	0.555	0.520	0.511	0.498	0.495	0.425	0.417	0.358	0.338	0.338	0.338	0.338
60	1.926	1.275	0.890	0.618	0.580	0.570	0.556	0.553	0.477	0.469	0.406	0.338	0.338	0.338	0.338
65	2.247	1.376	0.967	0.681	0.640	0.629	0.614	0.611	0.530	0.521	0.454	0.364	0.338	0.338	0.338
70	2.568	1.478	1.044	0.744	0.700	0.689	0.672	0.669	0.582	0.572	0.502	0.407	0.338	0.338	0.338
75	2.890	1.579	1.120	0.807	0.760	0.748	0.730	0.727	0.634	0.624	0.550	0.451	0.338	0.338	0.338
80	3.098	1.681	1.197	0.870	0.820	0.807	0.788	0.784	0.687	0.676	0.598	0.494	0.338	0.338	0.338
85	3.215	1.838	1.274	0.933	0.880	0.867	0.846	0.842	0.739	0.728	0.645	0.538	0.338	0.338	0.338
90	3.332	2.033	1.350	0.995	0.940	0.926	0.905	0.900	0.792	0.780	0.693	0.581	0.352	0.338	0.338
95	3.449	2.229	1.427	1.058	1.000	0.985	0.963	0.958	0.844	0.831	0.741	0.625	0.390	0.338	0.338
100	3.567	2.424	1.504	1.121	1.060	1.045	1.021	1.016	0.897	0.883	0.789	0.668	0.427	0.338	0.338
105	3.684	2.619	1.581	1.184	1.120	1.104	1.079	1.074	0.949	0.935	0.837	0.712	0.465	0.338	0.338
110	3.801	2.815	1.657	1.247	1.180	1.163	1.137	1.132	1.001	0.987	0.885	0.755	0.503	0.338	0.338
115	3.918	3.010	1.749	1.310	1.240	1.223	1.195	1.189	1.054	1.039	0.933	0.799	0.541	0.338	0.338
120	4.035	3.089	1.921	1.372	1.300	1.282	1.253	1.247	1.106	1.091	0.981	0.843	0.578	0.338	0.338
125	4.110	3.153	2.092	1.435	1.360	1.341	1.311	1.305	1.159	1.142	1.029	0.886	0.616	0.338	0.338
130	4.159	3.217	2.264	1.498	1.420	1.401	1.369	1.363	1.211	1.194	1.076	0.930	0.654	0.338	0.338
135	4.207	3.280	2.435	1.561	1.480	1.460	1.427	1.421	1.264	1.246	1.124	0.973	0.692	0.355	0.338
140	4.256	3.344	2.607	1.624	1.540	1.519	1.486	1.479	1.316	1.298	1.172	1.017	0.730	0.392	0.338
145	4.305	3.407	2.778	1.687	1.600	1.578	1.544	1.536	1.369	1.350	1.220	1.060	0.767	0.428	0.338
150	4.354	3.471	2.950	1.787	1.660	1.638	1.602	1.594	1.421	1.402	1.268	1.104	0.805	0.464	0.338
155	4.403	3.535	3.060	1.936	1.720	1.697	1.660	1.652	1.473	1.453	1.316	1.147	0.843	0.500	0.338
160	4.452	3.598	3.111	2.085	1.855	1.800	1.718	1.710	1.526	1.505	1.364	1.191	0.881	0.536	0.338
165	4.500	3.662	3.163	2.234	1.993	1.935	1.844	1.825	1.578	1.557	1.412	1.234	0.918	0.572	0.338
170	4.549	3.725	3.215	2.382	2.131	2.070	1.974	1.954	1.631	1.609	1.460	1.278	0.956	0.608	0.349
175	4.598	3.789	3.266	2.531	2.269	2.204	2.104	2.083	1.683	1.661	1.507	1.321	0.994	0.644	0.384
180	4.647	3.853	3.318	2.680	2.407	2.339	2.234	2.213	1.750	1.713	1.555	1.365	1.032	0.681	0.419
185	4.696	3.916	3.370	2.828	2.545	2.473	2.364	2.342	1.856	1.807	1.603	1.408	1.070	0.717	0.454
190	4.745	3.980	3.422	2.977	2.683	2.608	2.494	2.471	1.962	1.911	1.651	1.452	1.107	0.753	0.488
195	4.794	4.043	3.473	3.061	2.821	2.742	2.625	2.600	2.069	2.014	1.699	1.495	1.145	0.789	0.523
200	4.842	4.105	3.525	3.104	2.959	2.877	2.755	2.730	2.175	2.118	1.767	1.539	1.183	0.825	0.558
205	4.891	4.164	3.577	3.148	3.054	3.011	2.885	2.859	2.281	2.222	1.852	1.582	1.221	0.861	0.593
210	4.940	4.223	3.628	3.192	3.099	3.071	3.015	2.988	2.388	2.325	1.937	1.626	1.258	0.897	0.628
215	4.989	4.282	3.680	3.236	3.144	3.117	3.073	3.064	2.494	2.429	2.022	1.669	1.296	0.933	0.663
220	5.038	4.341	3.732	3.280	3.189	3.162	3.119	3.110	2.600	2.533	2.107	1.713	1.334	0.970	0.697
225	5.087	4.400	3.783	3.324	3.234	3.208	3.165	3.156	2.706	2.636	2.193	1.777	1.372	1.006	0.732
230	5.135	4.459	3.835	3.368	3.279	3.253	3.212	3.203	2.813	2.740	2.278	1.846	1.410	1.042	0.767
235	5.184	4.518	3.887	3.411	3.324	3.299	3.258	3.249	2.919	2.844	2.363	1.916	1.447	1.078	0.802
240	5.233	4.577	3.938	3.455	3.369	3.344	3.304	3.295	3.025	2.947	2.448	1.985	1.485	1.114	0.837
245	-	4.636	3.990	3.499	3.414	3.390	3.350	3.342	3.081	3.042	2.533	2.054	1.523	1.150	0.872
250	-	4.695	4.042	3.543	3.459	3.435	3.396	3.388	3.133	3.095	2.619	2.124	1.561	1.186	0.906
255	-	4.754	4.097	3.587	3.504	3.481	3.443	3.434	3.185	3.148	2.704	2.193	1.598	1.222	0.941
260	-	4.813	4.163	3.631	3.549	3.526	3.489	3.481	3.237	3.200	2.789	2.262	1.636	1.259	0.976
265	-	4.872	4.229	3.675	3.594	3.572	3.535	3.527	3.288	3.253	2.874	2.332	1.674	1.295	1.011
270	-	4.931	4.295	3.718	3.639	3.617	3.581	3.573	3.340	3.306	2.960	2.401	1.712	1.331	1.046
275	-	4.990	4.361	3.762	3.684	3.663	3.627	3.620	3.392	3.359	3.042	2.470	1.781	1.367	1.081
280	-	5.049	4.427	3.806	3.729	3.708	3.673	3.666	3.444	3.411	3.104	2.540	1.862	1.403	1.115
285	-	5.108	4.493	3.850	3.774	3.754	3.720	3.713	3.495	3.464	3.166	2.609	1.942	1.439	1.150
290	-	5.167	4.559	3.894	3.819	3.799	3.766	3.759	3.547	3.517	3.228	2.678	2.023	1.475	1.185
295	-	5.226	4.625	3.938	3.864	3.845	3.812	3.805	3.599	3.569	3.290	2.748	2.104	1.511	1.220
300	-	5.285	4.691	3.982	3.909	3.890	3.858	3.852	3.651	3.622	3.352	2.817	2.184	1.548	1.255
305	-	5.344	4.757	4.026	3.954	3.936	3.904	3.898	3.702	3.675	3.414	2.886	2.265	1.584	1.290
310	-	-	4.823	4.069	3.999	3.981	3.951	3.944	3.754	3.727	3.476	2.956	2.346	1.620	1.324
315	-	-	4.889	4.160	4.044	4.027	3.997	3.991	3.806	3.780	3.538	3.025	2.426	1.656	1.359
320	-	-	4.954	4.265	4.101	4.072	4.043	4.037	3.858	3.833	3.600	3.106	2.507	1.692	1.394
325	-	-	5.020	4.370	4.205	4.166	4.101	4.088	3.910	3.885	3.662	3.188	2.588	1.738	1.429
330	-	-	5.086	4.474	4.308	4.269	4.203	4.190	3.961	3.938	3.724	3.270	2.668	1.827	1.464
335	-	-	5.152	4.579	4.412	4.372	4.304	4.291	4.013	3.991	3.786	3.352	2.749	1.917	1.499
340	-	-	5.218	4.684	4.516	4.475	4.406	4.392	4.065	4.044	3.848	3.434	2.830	2.006	1.533

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C6: Circular Hollow Columns: Fire Resistance Period: 75 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	2.584	1.392	0.999	0.721	0.672	0.659	0.642	0.638	0.482	0.475	0.428	0.338	0.338	0.338	0.338
45	2.584	1.429	1.082	0.813	0.759	0.745	0.726	0.722	0.560	0.552	0.497	0.435	0.338	0.338	0.338
50	2.810	1.566	1.193	0.904	0.846	0.831	0.810	0.805	0.639	0.629	0.566	0.498	0.375	0.338	0.338
55	3.154	1.704	1.305	0.995	0.933	0.917	0.894	0.889	0.717	0.706	0.635	0.561	0.429	0.338	0.338
60	3.372	2.079	1.416	1.087	1.020	1.003	0.978	0.973	0.796	0.783	0.703	0.624	0.484	0.338	0.338
65	3.589	2.489	1.528	1.178	1.107	1.089	1.062	1.056	0.874	0.861	0.772	0.687	0.539	0.355	0.338
70	3.807	2.898	1.639	1.270	1.194	1.175	1.146	1.140	0.953	0.938	0.841	0.751	0.593	0.404	0.338
75	4.024	3.120	1.804	1.361	1.281	1.261	1.230	1.223	1.031	1.015	0.910	0.814	0.648	0.453	0.338
80	4.242	3.250	2.123	1.452	1.368	1.347	1.314	1.307	1.110	1.092	0.979	0.877	0.702	0.501	0.338
85	-	3.380	2.441	1.544	1.455	1.433	1.398	1.391	1.188	1.169	1.048	0.940	0.757	0.550	0.338
90	-	3.509	2.760	1.635	1.542	1.519	1.482	1.474	1.267	1.246	1.117	1.003	0.812	0.599	0.338
95	-	3.639	3.045	1.734	1.629	1.605	1.566	1.558	1.345	1.323	1.186	1.066	0.866	0.647	0.344
100	-	3.769	3.122	1.975	1.716	1.692	1.650	1.641	1.424	1.401	1.255	1.129	0.921	0.696	0.390
105	-	3.899	3.200	2.216	1.931	1.865	1.755	1.731	1.502	1.478	1.323	1.192	0.975	0.745	0.435
110	-	4.028	3.278	2.458	2.154	2.086	1.976	1.952	1.581	1.555	1.392	1.255	1.030	0.793	0.481
115	-	4.113	3.356	2.699	2.377	2.307	2.197	2.174	1.660	1.632	1.461	1.319	1.085	0.842	0.527
120	-	4.168	3.434	2.940	2.600	2.528	2.418	2.395	1.769	1.709	1.530	1.382	1.139	0.891	0.573
125	-	4.223	3.512	3.073	2.823	2.748	2.640	2.617	1.995	1.912	1.599	1.445	1.194	0.939	0.619
130	-	4.279	3.590	3.138	3.037	2.969	2.861	2.839	2.221	2.139	1.668	1.508	1.248	0.988	0.665
135	-	4.334	3.668	3.203	3.101	3.079	3.047	3.041	2.448	2.366	1.770	1.571	1.303	1.037	0.711
140	-	4.389	3.746	3.268	3.165	3.142	3.110	3.103	2.674	2.593	1.994	1.634	1.357	1.085	0.757
145	-	4.444	3.824	3.334	3.230	3.206	3.173	3.166	2.900	2.819	2.218	1.697	1.412	1.134	0.803
150	-	4.499	3.902	3.399	3.294	3.270	3.235	3.229	3.057	3.037	2.441	1.833	1.467	1.183	0.848
155	-	4.555	3.979	3.464	3.358	3.334	3.298	3.291	3.115	3.094	2.665	2.015	1.521	1.231	0.894
160	-	4.610	4.057	3.529	3.422	3.398	3.361	3.354	3.173	3.152	2.888	2.197	1.576	1.280	0.940
165	-	4.665	4.127	3.594	3.486	3.461	3.424	3.416	3.231	3.209	3.052	2.379	1.630	1.329	0.986
170	-	4.720	4.193	3.659	3.550	3.525	3.486	3.479	3.289	3.266	3.107	2.561	1.685	1.378	1.032
175	-	4.776	4.259	3.724	3.615	3.589	3.549	3.541	3.346	3.324	3.161	2.743	1.762	1.426	1.078
180	-	4.831	4.325	3.789	3.679	3.653	3.612	3.604	3.404	3.381	3.216	2.925	1.887	1.475	1.124
185	-	4.886	4.391	3.854	3.743	3.717	3.675	3.666	3.462	3.439	3.270	3.054	2.011	1.524	1.170
190	-	4.941	4.457	3.919	3.807	3.780	3.737	3.729	3.520	3.496	3.325	3.105	2.135	1.572	1.216
195	-	4.996	4.523	3.984	3.871	3.844	3.800	3.791	3.578	3.554	3.379	3.157	2.259	1.621	1.262
200	-	5.052	4.589	4.049	3.935	3.908	3.863	3.854	3.636	3.611	3.434	3.208	2.383	1.670	1.307
205	-	5.107	4.655	4.117	4.000	3.972	3.926	3.916	3.694	3.668	3.488	3.260	2.508	1.718	1.353
210	-	5.162	4.721	4.188	4.064	4.036	3.988	3.979	3.752	3.726	3.543	3.311	2.632	1.793	1.399
215	-	-	4.787	4.259	4.133	4.101	4.051	4.041	3.810	3.783	3.597	3.362	2.756	1.870	1.445
220	-	-	4.853	4.330	4.203	4.172	4.118	4.107	3.867	3.841	3.651	3.414	2.880	1.946	1.491
225	-	-	4.919	4.401	4.274	4.243	4.188	4.177	3.925	3.898	3.706	3.465	3.004	2.023	1.537
230	-	-	4.985	4.471	4.345	4.313	4.259	4.248	3.983	3.956	3.760	3.516	3.074	2.100	1.583
235	-	-	5.051	4.542	4.415	4.384	4.329	4.318	4.041	4.013	3.815	3.568	3.127	2.177	1.629
240	-	-	5.117	4.613	4.486	4.454	4.399	4.388	4.103	4.071	3.869	3.619	3.179	2.253	1.675
245	-	-	5.183	4.684	4.556	4.525	4.470	4.459	4.173	4.138	3.924	3.671	3.232	2.330	1.721
250	-	-	5.249	4.755	4.627	4.595	4.540	4.529	4.243	4.208	3.978	3.722	3.285	2.407	1.785
255	-	-	5.315	4.825	4.698	4.666	4.611	4.599	4.312	4.278	4.033	3.773	3.338	2.483	1.849
260	-	-	-	4.896	4.768	4.736	4.681	4.670	4.382	4.347	4.090	3.825	3.390	2.560	1.914
265	-	-	-	4.967	4.839	4.807	4.751	4.740	4.452	4.417	4.164	3.876	3.443	2.637	1.979
270	-	-	-	5.038	4.910	4.877	4.822	4.810	4.522	4.487	4.237	3.927	3.496	2.714	2.043
275	-	-	-	5.108	4.980	4.948	4.892	4.881	4.591	4.556	4.311	3.979	3.548	2.790	2.108
280	-	-	-	5.179	5.051	5.018	4.962	4.951	4.661	4.626	4.385	4.030	3.601	2.867	2.173
285	-	-	-	5.250	5.122	5.089	5.033	5.022	4.731	4.696	4.459	4.083	3.654	2.944	2.237
290	-	-	-	5.321	5.192	5.159	5.103	5.092	4.801	4.765	4.533	4.168	3.707	3.020	2.302
295	-	-	-	5.392	5.263	5.230	5.174	5.162	4.871	4.835	4.607	4.253	3.759	3.098	2.367
300	-	-	-	-	5.333	5.301	5.244	5.233	4.940	4.905	4.681	4.338	3.812	3.176	2.431
305	-	-	-	-	5.404	5.371	5.314	5.303	5.010	4.974	4.754	4.423	3.865	3.254	2.496
310	-	-	-	-	-	-	5.385	5.373	5.080	5.044	4.828	4.508	3.918	3.332	2.560
315	-	-	-	-	-	-	-	-	5.150	5.113	4.902	4.593	3.970	3.409	2.625
320	-	-	-	-	-	-	-	-	5.219	5.183	4.976	4.678	4.023	3.487	2.690
325	-	-	-	-	-	-	-	-	5.289	5.253	5.050	4.763	4.076	3.565	2.754
330	-	-	-	-	-	-	-	-	5.359	5.322	5.124	4.848	4.171	3.643	2.819
335	-	-	-	-	-	-	-	-	5.429	5.392	5.197	4.933	4.269	3.721	2.884
340	-	-	-	-	-	-	-	-	-	5.462	5.271	5.018	4.367	3.799	2.948

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C7: Circular Hollow Columns: Fire Resistance Period: 90 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	3.427	2.589	1.426	1.098	1.036	1.021	0.998	0.993	0.878	0.866	0.778	0.679	0.461	0.338	0.338
45	3.427	2.589	1.456	1.173	1.116	1.102	1.081	1.077	0.967	0.956	0.870	0.765	0.535	0.412	0.338
50	3.750	2.804	1.597	1.293	1.232	1.217	1.194	1.189	1.071	1.058	0.965	0.851	0.609	0.476	0.338
55	4.050	3.174	1.786	1.414	1.348	1.332	1.307	1.302	1.174	1.160	1.060	0.937	0.683	0.540	0.354
60	4.824	3.403	2.342	1.534	1.464	1.447	1.420	1.414	1.278	1.263	1.155	1.023	0.757	0.604	0.413
65	-	3.631	2.897	1.654	1.580	1.562	1.533	1.527	1.381	1.365	1.249	1.109	0.832	0.667	0.473
70	-	3.860	3.155	1.921	1.697	1.677	1.646	1.640	1.484	1.467	1.344	1.195	0.906	0.731	0.532
75	-	4.810	3.315	2.371	2.054	1.976	1.855	1.830	1.588	1.570	1.439	1.282	0.980	0.795	0.592
80	-	-	3.476	2.821	2.478	2.391	2.258	2.232	1.691	1.672	1.534	1.368	1.054	0.859	0.651
85	-	-	3.636	3.090	2.902	2.805	2.661	2.634	1.971	1.900	1.629	1.454	1.128	0.922	0.711
90	-	-	3.796	3.197	3.100	3.076	3.040	3.034	2.324	2.246	1.728	1.540	1.202	0.986	0.770
95	-	-	3.957	3.305	3.196	3.170	3.130	3.123	2.677	2.592	2.031	1.626	1.276	1.050	0.830
100	-	-	4.093	3.412	3.292	3.264	3.220	3.212	3.030	2.939	2.333	1.712	1.351	1.114	0.889
105	-	-	4.151	3.519	3.389	3.358	3.310	3.301	3.103	3.084	2.636	1.942	1.425	1.178	0.949
110	-	-	4.210	3.627	3.485	3.452	3.399	3.389	3.173	3.154	2.939	2.189	1.499	1.241	1.008
115	-	-	4.268	3.734	3.581	3.546	3.489	3.478	3.243	3.223	3.080	2.437	1.573	1.305	1.068
120	-	-	4.326	3.841	3.678	3.640	3.579	3.567	3.313	3.293	3.148	2.684	1.647	1.369	1.127
125	-	-	4.384	3.949	3.774	3.734	3.669	3.656	3.383	3.363	3.216	2.932	1.721	1.433	1.186
130	-	-	4.443	4.056	3.870	3.828	3.758	3.745	3.453	3.433	3.284	3.073	1.975	1.496	1.246
135	-	-	4.501	4.128	3.967	3.922	3.848	3.834	3.523	3.502	3.352	3.141	2.229	1.560	1.305
140	-	-	4.559	4.190	4.063	4.016	3.938	3.923	3.593	3.572	3.420	3.208	2.483	1.624	1.365
145	-	-	4.617	4.251	4.133	4.101	4.028	4.012	3.663	3.642	3.488	3.276	2.738	1.688	1.424
150	-	-	4.675	4.313	4.198	4.166	4.108	4.096	3.733	3.711	3.556	3.343	2.992	1.808	1.484
155	-	-	4.734	4.375	4.262	4.232	4.175	4.163	3.803	3.781	3.624	3.411	3.085	1.991	1.543
160	-	-	4.792	4.437	4.327	4.297	4.242	4.230	3.873	3.851	3.692	3.478	3.147	2.175	1.603
165	-	-	4.850	4.499	4.391	4.362	4.309	4.298	3.943	3.921	3.760	3.546	3.209	2.359	1.662
170	-	-	4.908	4.561	4.456	4.428	4.376	4.365	4.014	3.990	3.828	3.613	3.270	2.543	1.722
175	-	-	4.967	4.623	4.520	4.493	4.443	4.433	4.084	4.060	3.896	3.681	3.332	2.726	1.826
180	-	-	5.025	4.685	4.585	4.559	4.510	4.500	4.165	4.138	3.964	3.748	3.394	2.910	1.931
185	-	-	5.083	4.746	4.649	4.624	4.578	4.568	4.246	4.218	4.032	3.816	3.455	3.052	2.036
190	-	-	5.141	4.808	4.714	4.689	4.645	4.635	4.327	4.299	4.103	3.883	3.517	3.111	2.141
195	-	-	5.200	4.870	4.779	4.755	4.712	4.703	4.407	4.380	4.182	3.951	3.579	3.169	2.246
200	-	-	-	4.932	4.843	4.820	4.779	4.770	4.488	4.460	4.261	4.019	3.641	3.227	2.350
205	-	-	-	4.994	4.908	4.886	4.846	4.838	4.569	4.541	4.340	4.087	3.702	3.285	2.455
210	-	-	-	5.056	4.972	4.951	4.913	4.905	4.650	4.622	4.419	4.163	3.764	3.343	2.560
215	-	-	-	5.118	5.037	5.016	4.980	4.973	4.730	4.702	4.498	4.239	3.826	3.401	2.665
220	-	-	-	5.180	5.101	5.082	5.047	5.040	4.811	4.783	4.577	4.315	3.888	3.459	2.770
225	-	-	-	5.241	5.166	5.147	5.114	5.107	4.892	4.864	4.656	4.391	3.949	3.517	2.874
230	-	-	-	-	5.230	5.213	5.181	5.175	4.973	4.944	4.735	4.467	4.011	3.576	2.979
235	-	-	-	-	5.295	5.278	5.249	5.242	5.054	5.025	4.814	4.543	4.073	3.634	3.062
240	-	-	-	-	-	-	5.316	5.310	5.134	5.106	4.893	4.620	4.142	3.692	3.121
245	-	-	-	-	-	-	-	-	5.215	5.186	4.972	4.696	4.212	3.750	3.180
250	-	-	-	-	-	-	-	-	5.296	5.267	5.051	4.772	4.282	3.808	3.239
255	-	-	-	-	-	-	-	-	5.377	5.348	5.130	4.848	4.353	3.866	3.298
260	-	-	-	-	-	-	-	-	-	-	5.209	4.924	4.423	3.924	3.357
265	-	-	-	-	-	-	-	-	-	-	5.288	5.000	4.493	3.983	3.416
270	-	-	-	-	-	-	-	-	-	-	5.367	5.076	4.563	4.041	3.475
275	-	-	-	-	-	-	-	-	-	-	5.446	5.152	4.633	4.105	3.534
280	-	-	-	-	-	-	-	-	-	-	-	5.228	4.703	4.182	3.593
285	-	-	-	-	-	-	-	-	-	-	-	5.304	4.774	4.259	3.652
290	-	-	-	-	-	-	-	-	-	-	-	5.380	4.844	4.336	3.711
295	-	-	-	-	-	-	-	-	-	-	-	-	4.914	4.413	3.770
300	-	-	-	-	-	-	-	-	-	-	-	-	4.984	4.490	3.829
305	-	-	-	-	-	-	-	-	-	-	-	-	5.054	4.567	3.888
310	-	-	-	-	-	-	-	-	-	-	-	-	5.124	4.643	3.947
315	-	-	-	-	-	-	-	-	-	-	-	-	5.195	4.720	4.006
320	-	-	-	-	-	-	-	-	-	-	-	-	5.265	4.797	4.065
325	-	-	-	-	-	-	-	-	-	-	-	-	5.335	4.874	4.150
330	-	-	-	-	-	-	-	-	-	-	-	-	5.405	4.951	4.243
335	-	-	-	-	-	-	-	-	-	-	-	-	5.475	5.028	4.337
340	-	-	-	-	-	-	-	-	-	-	-	-	-	5.105	4.430

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C8: Circular Hollow Columns: Fire Resistance Period: 105 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	3.671	3.385	2.671	1.476	1.405	1.388	1.362	1.356	1.225	1.211	1.112	0.995	0.800	0.613	0.338
45	4.276	3.385	2.671	1.496	1.438	1.424	1.402	1.397	1.285	1.273	1.186	1.079	0.892	0.697	0.453
50	4.986	3.703	2.877	1.641	1.579	1.564	1.540	1.535	1.414	1.401	1.306	1.190	0.989	0.780	0.528
55	-	4.008	3.239	2.033	1.720	1.704	1.678	1.673	1.543	1.529	1.426	1.302	1.086	0.863	0.603
60	-	4.949	3.498	2.730	2.378	2.292	2.156	2.130	1.671	1.656	1.547	1.414	1.183	0.946	0.678
65	-	-	3.758	3.140	3.035	2.944	2.790	2.762	2.067	1.993	1.667	1.526	1.280	1.029	0.753
70	-	-	4.017	3.329	3.209	3.180	3.135	3.126	2.633	2.550	1.993	1.637	1.377	1.112	0.828
75	-	-	4.276	3.519	3.383	3.351	3.299	3.290	3.073	3.051	2.492	1.826	1.474	1.195	0.903
80	-	-	-	3.708	3.556	3.521	3.464	3.453	3.208	3.183	2.990	2.250	1.571	1.279	0.978
85	-	-	-	3.897	3.730	3.692	3.628	3.616	3.343	3.315	3.136	2.674	1.667	1.362	1.053
90	-	-	-	4.086	3.904	3.862	3.793	3.779	3.478	3.447	3.249	3.047	1.867	1.445	1.128
95	-	-	-	4.288	4.077	4.032	3.957	3.943	3.614	3.580	3.362	3.140	2.197	1.528	1.203
100	-	-	-	4.490	4.165	4.132	4.095	4.089	3.749	3.712	3.475	3.233	2.527	1.611	1.278
105	-	-	-	4.692	4.251	4.206	4.155	4.149	3.884	3.844	3.588	3.326	2.857	1.694	1.353
110	-	-	-	4.894	4.338	4.279	4.215	4.209	4.019	3.976	3.701	3.418	3.067	1.883	1.428
115	-	-	-	5.096	4.424	4.352	4.275	4.269	4.113	4.093	3.814	3.511	3.138	2.124	1.503
120	-	-	-	5.298	4.511	4.425	4.334	4.329	4.175	4.155	3.927	3.604	3.210	2.365	1.578
125	-	-	-	-	4.597	4.498	4.394	4.389	4.236	4.216	4.040	3.697	3.281	2.605	1.653
130	-	-	-	-	4.684	4.572	4.454	4.449	4.297	4.278	4.121	3.789	3.353	2.846	1.740
135	-	-	-	-	4.770	4.645	4.514	4.509	4.359	4.339	4.185	3.882	3.424	3.050	1.953
140	-	-	-	-	4.857	4.718	4.574	4.569	4.420	4.401	4.249	3.975	3.496	3.123	2.166
145	-	-	-	-	4.943	4.791	4.634	4.629	4.481	4.463	4.313	4.068	3.567	3.196	2.378
150	-	-	-	-	5.030	4.864	4.694	4.689	4.543	4.524	4.377	4.140	3.639	3.269	2.591
155	-	-	-	-	5.116	4.938	4.754	4.749	4.604	4.586	4.441	4.209	3.710	3.341	2.804
160	-	-	-	-	5.203	5.011	4.814	4.809	4.665	4.647	4.505	4.278	3.782	3.414	3.017
165	-	-	-	-	5.289	5.084	4.874	4.869	4.726	4.709	4.569	4.347	3.853	3.487	3.093
170	-	-	-	-	-	5.157	4.934	4.929	4.788	4.771	4.633	4.416	3.925	3.560	3.159
175	-	-	-	-	-	5.230	4.994	4.989	4.849	4.832	4.698	4.486	3.996	3.633	3.224
180	-	-	-	-	-	-	5.054	5.049	4.910	4.894	4.762	4.555	4.068	3.706	3.289
185	-	-	-	-	-	-	5.114	5.109	4.972	4.955	4.826	4.624	4.144	3.779	3.354
190	-	-	-	-	-	-	5.174	5.169	5.033	5.017	4.890	4.693	4.220	3.852	3.419
195	-	-	-	-	-	-	-	5.229	5.094	5.079	4.954	4.762	4.297	3.925	3.484
200	-	-	-	-	-	-	-	-	5.156	5.140	5.018	4.831	4.374	3.998	3.550
205	-	-	-	-	-	-	-	-	5.217	5.202	5.082	4.901	4.451	4.071	3.615
210	-	-	-	-	-	-	-	-	-	-	5.146	4.970	4.528	4.143	3.680
215	-	-	-	-	-	-	-	-	-	-	5.210	5.039	4.604	4.214	3.745
220	-	-	-	-	-	-	-	-	-	-	5.274	5.108	4.681	4.285	3.810
225	-	-	-	-	-	-	-	-	-	-	-	5.177	4.758	4.357	3.876
230	-	-	-	-	-	-	-	-	-	-	-	5.246	4.835	4.428	3.941
235	-	-	-	-	-	-	-	-	-	-	-	5.316	4.912	4.499	4.006
240	-	-	-	-	-	-	-	-	-	-	-	-	4.988	4.571	4.071
245	-	-	-	-	-	-	-	-	-	-	-	-	5.065	4.642	4.140
250	-	-	-	-	-	-	-	-	-	-	-	-	5.142	4.713	4.210
255	-	-	-	-	-	-	-	-	-	-	-	-	5.219	4.785	4.280
260	-	-	-	-	-	-	-	-	-	-	-	-	5.296	4.856	4.349
265	-	-	-	-	-	-	-	-	-	-	-	-	5.372	4.927	4.419
270	-	-	-	-	-	-	-	-	-	-	-	-	-	4.999	4.489
275	-	-	-	-	-	-	-	-	-	-	-	-	-	5.070	4.559
280	-	-	-	-	-	-	-	-	-	-	-	-	-	5.141	4.628
285	-	-	-	-	-	-	-	-	-	-	-	-	-	5.213	4.698
290	-	-	-	-	-	-	-	-	-	-	-	-	-	5.284	4.768
295	-	-	-	-	-	-	-	-	-	-	-	-	-	5.355	4.837
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.907
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.977
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.047
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.116
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.186
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.256
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.325
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.395
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.465

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table C9: Circular Hollow Columns: Fire Resistance Period: 120 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
40	-	3.671	3.391	2.730	1.550	1.550	1.550	1.550	1.550	1.550	1.446	1.318	1.104	0.893	0.629
45	-	4.087	3.391	2.730	1.737	1.659	1.550	1.550	1.550	1.550	1.472	1.365	1.178	0.982	0.724
50	-	4.950	3.705	3.040	2.667	2.576	2.427	2.400	1.725	1.657	1.615	1.500	1.298	1.088	0.821
55	-	-	4.036	3.573	3.348	3.293	3.198	3.181	2.530	2.449	1.901	1.634	1.418	1.195	0.918
60	-	-	4.367	4.105	3.867	3.810	3.712	3.693	3.215	3.148	2.619	1.939	1.538	1.301	1.016
65	-	-	-	4.638	4.387	4.326	4.226	4.206	3.700	3.586	3.111	2.563	1.658	1.407	1.113
70	-	-	-	-	4.906	4.843	4.740	4.718	4.185	4.023	3.296	3.072	1.955	1.514	1.210
75	-	-	-	-	-	-	-	-	4.670	4.461	3.481	3.230	2.453	1.620	1.307
80	-	-	-	-	-	-	-	-	-	4.899	3.665	3.387	2.950	1.740	1.404
85	-	-	-	-	-	-	-	-	-	5.337	3.850	3.545	3.132	2.107	1.502
90	-	-	-	-	-	-	-	-	-	-	4.035	3.702	3.251	2.475	1.599
95	-	-	-	-	-	-	-	-	-	-	4.251	3.860	3.370	2.842	1.696
100	-	-	-	-	-	-	-	-	-	-	4.477	4.017	3.489	3.077	1.921
105	-	-	-	-	-	-	-	-	-	-	4.703	4.116	3.608	3.167	2.192
110	-	-	-	-	-	-	-	-	-	-	4.928	4.178	3.727	3.257	2.462
115	-	-	-	-	-	-	-	-	-	-	5.154	4.239	3.846	3.347	2.733
120	-	-	-	-	-	-	-	-	-	-	5.380	4.300	3.965	3.437	3.004
125	-	-	-	-	-	-	-	-	-	-	-	4.362	4.082	3.527	3.101
130	-	-	-	-	-	-	-	-	-	-	-	4.423	4.142	3.617	3.176
135	-	-	-	-	-	-	-	-	-	-	-	4.485	4.203	3.707	3.252
140	-	-	-	-	-	-	-	-	-	-	-	4.546	4.263	3.797	3.327
145	-	-	-	-	-	-	-	-	-	-	-	4.607	4.324	3.887	3.403
150	-	-	-	-	-	-	-	-	-	-	-	4.669	4.385	3.977	3.478
155	-	-	-	-	-	-	-	-	-	-	-	4.730	4.445	4.067	3.553
160	-	-	-	-	-	-	-	-	-	-	-	4.791	4.506	4.138	3.629
165	-	-	-	-	-	-	-	-	-	-	-	4.853	4.567	4.205	3.704
170	-	-	-	-	-	-	-	-	-	-	-	4.914	4.627	4.273	3.780
175	-	-	-	-	-	-	-	-	-	-	-	4.975	4.688	4.341	3.855
180	-	-	-	-	-	-	-	-	-	-	-	5.037	4.748	4.408	3.931
185	-	-	-	-	-	-	-	-	-	-	-	5.098	4.809	4.476	4.006
190	-	-	-	-	-	-	-	-	-	-	-	5.159	4.870	4.544	4.082
195	-	-	-	-	-	-	-	-	-	-	-	5.221	4.930	4.612	4.158
200	-	-	-	-	-	-	-	-	-	-	-	-	4.991	4.679	4.234
205	-	-	-	-	-	-	-	-	-	-	-	-	5.052	4.747	4.311
210	-	-	-	-	-	-	-	-	-	-	-	-	5.112	4.815	4.387
215	-	-	-	-	-	-	-	-	-	-	-	-	5.173	4.882	4.463
220	-	-	-	-	-	-	-	-	-	-	-	-	5.233	4.950	4.539
225	-	-	-	-	-	-	-	-	-	-	-	-	5.294	5.018	4.615
230	-	-	-	-	-	-	-	-	-	-	-	-	-	5.086	4.692
235	-	-	-	-	-	-	-	-	-	-	-	-	-	5.153	4.768
240	-	-	-	-	-	-	-	-	-	-	-	-	-	5.221	4.844
245	-	-	-	-	-	-	-	-	-	-	-	-	-	5.289	4.920
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.997
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.073
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.149
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.225
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.301
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.378
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.999
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.129
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.259
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.390
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.520
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.650
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.781
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	6.911
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.041
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.172
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.302
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.432
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.563

Table applies to columns with protection to all sides. Thickness is intumescent only.

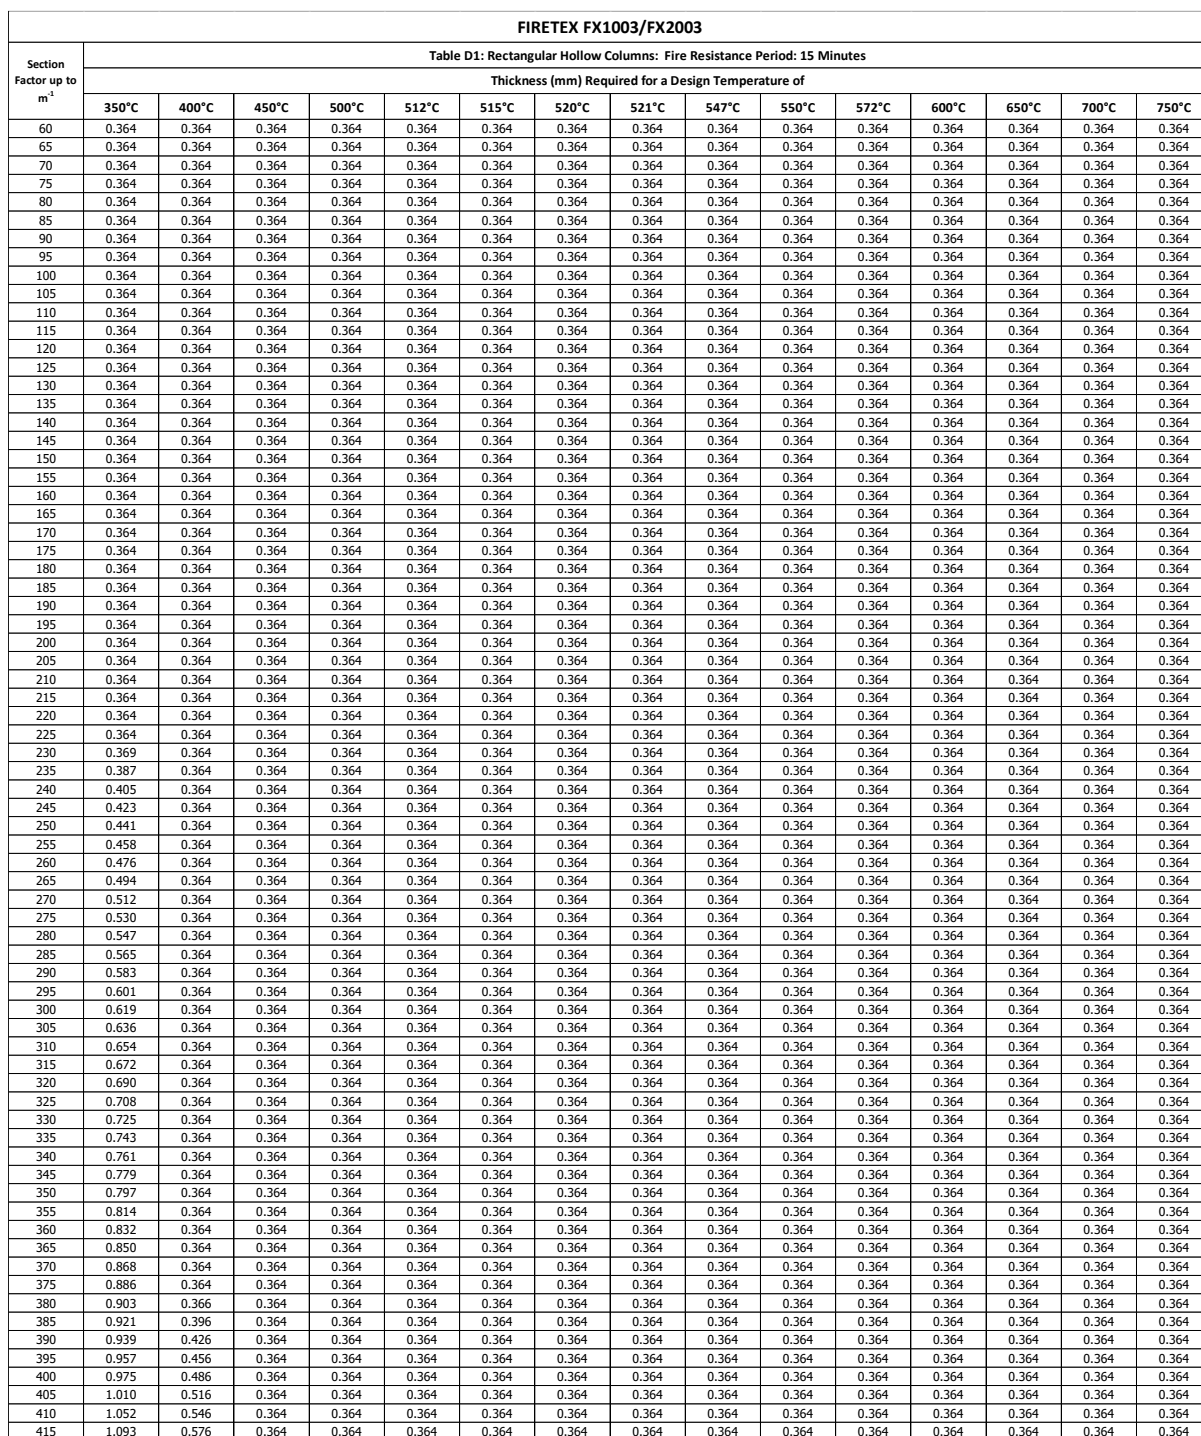


Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table D5: Rectangular Hollow Columns: Fire Resistance Period: 60 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
60	2.040	1.328	0.788	0.428	0.395	0.389	0.382	0.382	0.364	0.364	0.364	0.364	0.364	0.364	0.364
65	2.058	1.365	0.824	0.513	0.471	0.463	0.449	0.446	0.391	0.386	0.364	0.364	0.364	0.364	0.364
70	2.526	1.539	0.932	0.597	0.547	0.536	0.519	0.516	0.445	0.439	0.401	0.364	0.364	0.364	0.364
75	2.993	1.713	1.058	0.682	0.623	0.610	0.590	0.586	0.500	0.492	0.443	0.399	0.364	0.364	0.364
80	3.351	1.887	1.198	0.767	0.699	0.684	0.660	0.656	0.554	0.544	0.485	0.435	0.364	0.364	0.364
85	3.522	2.061	1.339	0.851	0.775	0.758	0.731	0.725	0.608	0.597	0.526	0.472	0.388	0.364	0.364
90	3.692	2.235	1.479	0.936	0.851	0.832	0.801	0.795	0.662	0.650	0.568	0.508	0.419	0.364	0.364
95	3.862	2.477	1.620	1.034	0.927	0.906	0.872	0.865	0.717	0.702	0.610	0.545	0.450	0.364	0.364
100	4.032	2.733	1.761	1.146	1.013	0.980	0.943	0.935	0.771	0.755	0.651	0.581	0.481	0.365	0.364
105	4.203	2.989	1.901	1.258	1.120	1.086	1.029	1.018	0.825	0.808	0.693	0.617	0.513	0.393	0.364
110	4.373	3.245	2.042	1.371	1.227	1.192	1.133	1.121	0.879	0.860	0.735	0.654	0.544	0.422	0.364
115	4.543	3.398	2.182	1.483	1.334	1.298	1.237	1.225	0.934	0.913	0.776	0.690	0.575	0.450	0.364
120	4.713	3.530	2.331	1.595	1.441	1.404	1.342	1.329	0.995	0.966	0.818	0.727	0.606	0.478	0.364
125	4.884	3.661	2.491	1.708	1.548	1.510	1.446	1.432	1.091	1.050	0.860	0.763	0.637	0.507	0.364
130	5.054	3.793	2.651	1.820	1.655	1.616	1.550	1.536	1.186	1.145	0.901	0.799	0.668	0.535	0.364
135	-	3.924	2.811	1.932	1.762	1.721	1.654	1.640	1.282	1.240	0.943	0.836	0.700	0.563	0.388
140	-	4.056	2.971	2.044	1.869	1.827	1.758	1.744	1.378	1.336	0.991	0.872	0.731	0.591	0.415
145	-	4.187	3.131	2.157	1.976	1.933	1.862	1.847	1.474	1.431	1.084	0.909	0.762	0.620	0.441
150	-	4.319	3.291	2.270	2.083	2.039	1.966	1.951	1.570	1.526	1.178	0.945	0.793	0.648	0.467
155	-	4.450	3.407	2.431	2.190	2.145	2.070	2.055	1.666	1.622	1.271	0.984	0.824	0.676	0.494
160	-	4.582	3.524	2.592	2.313	2.251	2.174	2.159	1.762	1.717	1.365	1.067	0.855	0.705	0.520
165	-	4.713	3.641	2.753	2.476	2.405	2.285	2.262	1.858	1.812	1.458	1.151	0.887	0.733	0.546
170	-	4.845	3.758	2.914	2.638	2.567	2.447	2.422	1.954	1.908	1.552	1.234	0.918	0.761	0.572
175	-	4.976	3.875	3.075	2.800	2.729	2.609	2.584	2.050	2.003	1.645	1.317	0.949	0.790	0.599
180	-	5.108	3.992	3.236	2.962	2.891	2.771	2.746	2.146	2.098	1.739	1.401	0.981	0.818	0.625
185	-	-	4.109	3.354	3.124	3.053	2.933	2.908	2.241	2.193	1.832	1.484	1.060	0.846	0.651
190	-	-	4.226	3.452	3.286	3.215	3.095	3.070	2.390	2.306	1.926	1.568	1.139	0.874	0.677
195	-	-	4.343	3.549	3.381	3.339	3.256	3.232	2.556	2.473	2.019	1.651	1.218	0.903	0.704
200	-	-	4.460	3.646	3.474	3.431	3.362	3.348	2.723	2.640	2.113	1.734	1.297	0.931	0.730
205	-	-	4.577	3.743	3.567	3.523	3.452	3.438	2.889	2.807	2.206	1.818	1.376	0.959	0.756
210	-	-	4.694	3.841	3.660	3.616	3.543	3.529	3.056	2.974	2.329	1.901	1.455	1.000	0.782
215	-	-	4.811	3.938	3.753	3.708	3.634	3.619	3.222	3.141	2.506	1.985	1.534	1.072	0.809
220	-	-	4.928	4.035	3.846	3.800	3.725	3.710	3.339	3.299	2.683	2.068	1.613	1.144	0.835
225	-	-	5.045	4.132	3.939	3.892	3.815	3.800	3.422	3.381	2.860	2.151	1.692	1.216	0.861
230	-	-	5.162	4.230	4.032	3.984	3.906	3.891	3.505	3.463	3.036	2.235	1.771	1.288	0.887
235	-	-	-	4.327	4.125	4.076	3.997	3.981	3.589	3.546	3.213	2.391	1.850	1.360	0.914
240	-	-	-	4.424	4.218	4.168	4.088	4.072	3.672	3.628	3.332	2.591	1.928	1.432	0.940
245	-	-	-	4.521	4.311	4.260	4.178	4.162	3.755	3.711	3.408	2.792	2.007	1.504	0.966
250	-	-	-	4.619	4.404	4.353	4.269	4.253	3.838	3.793	3.484	2.992	2.086	1.576	1.010
255	-	-	-	4.716	4.497	4.445	4.360	4.343	3.921	3.875	3.559	3.192	2.165	1.648	1.073
260	-	-	-	4.813	4.590	4.537	4.451	4.434	4.005	3.958	3.635	3.324	2.244	1.720	1.135
265	-	-	-	4.910	4.683	4.629	4.541	4.524	4.088	4.040	3.711	3.391	2.374	1.792	1.197
270	-	-	-	5.007	4.776	4.721	4.632	4.615	4.171	4.123	3.786	3.458	2.524	1.864	1.260
275	-	-	-	5.105	4.869	4.813	4.723	4.705	4.254	4.205	3.862	3.525	2.675	1.936	1.322
280	-	-	-	-	4.962	4.905	4.814	4.796	4.338	4.287	3.938	3.592	2.825	2.008	1.385
285	-	-	-	-	5.055	4.997	4.905	4.886	4.421	4.370	4.013	3.659	2.975	2.080	1.447
290	-	-	-	-	5.148	5.090	4.995	4.977	4.504	4.452	4.089	3.726	3.125	2.152	1.509
295	-	-	-	-	5.241	5.182	5.086	5.067	4.587	4.535	4.165	3.793	3.275	2.224	1.572
300	-	-	-	-	-	-	5.177	5.158	4.671	4.617	4.241	3.860	3.352	2.312	1.634
305	-	-	-	-	-	-	-	-	4.754	4.700	4.316	3.927	3.421	2.426	1.696
310	-	-	-	-	-	-	-	-	4.837	4.782	4.392	3.994	3.491	2.540	1.759
315	-	-	-	-	-	-	-	-	4.920	4.864	4.468	4.061	3.560	2.654	1.821
320	-	-	-	-	-	-	-	-	5.003	4.947	4.543	4.128	3.629	2.767	1.884
325	-	-	-	-	-	-	-	-	5.087	5.029	4.619	4.195	3.698	2.881	1.946
330	-	-	-	-	-	-	-	-	5.170	5.112	4.695	4.262	3.768	2.995	2.008
335	-	-	-	-	-	-	-	-	-	-	4.770	4.329	3.837	3.108	2.071
340	-	-	-	-	-	-	-	-	-	-	4.846	4.396	3.906	3.222	2.133
345	-	-	-	-	-	-	-	-	-	-	4.922	4.463	3.976	3.319	2.195
350	-	-	-	-	-	-	-	-	-	-	4.997	4.530	4.045	3.392	2.258
355	-	-	-	-	-	-	-	-	-	-	5.073	4.597	4.114	3.465	2.368
360	-	-	-	-	-	-	-	-	-	-	5.149	4.664	4.184	3.538	2.487
365	-	-	-	-	-	-	-	-	-	-	5.224	4.731	4.253	3.612	2.605
370	-	-	-	-	-	-	-	-	-	-	-	4.798	4.322	3.685	2.723
375	-	-	-	-	-	-	-	-	-	-	-	4.865	4.391	3.758	2.841
380	-	-	-	-	-	-	-	-	-	-	-	4.932	4.461	3.831	2.959
385	-	-	-	-	-	-	-	-	-	-	-	4.999	4.530	3.904	3.077
390	-	-	-	-	-	-	-	-	-	-	-	5.066	4.599	3.977	3.195
395	-	-	-	-	-	-	-	-	-	-	-	5.133	4.669	4.050	3.302
400	-	-	-	-	-	-	-	-	-	-	-	5.200	4.738	4.123	3.363
405	-	-	-	-	-	-	-	-	-	-	-	-	4.807	4.196	3.424
410	-	-	-	-	-	-	-	-	-	-	-	-	4.877	4.269	3.484
415	-	-	-	-	-	-	-	-	-	-	-	-	4.946	4.343	3.545

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm



FIRETEX FX1003/FX2003															
Section Factor up to m ⁻¹	Table D6: Rectangular Hollow Columns: Fire Resistance Period: 75 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
60	3.597	2.040	1.567	0.881	0.881	0.881	0.868	0.862	0.744	0.732	0.653	0.570	0.416	0.364	0.364
65	3.874	2.380	1.599	1.044	0.940	0.916	0.912	0.907	0.788	0.776	0.696	0.611	0.459	0.392	0.364
70	4.112	3.158	1.803	1.214	1.102	1.075	1.032	1.023	0.873	0.860	0.768	0.670	0.502	0.424	0.364
75	4.350	3.454	2.006	1.384	1.264	1.235	1.188	1.178	0.958	0.943	0.840	0.729	0.544	0.457	0.372
80	4.588	3.653	2.210	1.554	1.425	1.395	1.344	1.334	1.084	1.057	0.911	0.788	0.587	0.489	0.401
85	4.825	3.851	2.625	1.725	1.587	1.554	1.501	1.490	1.224	1.195	0.986	0.846	0.629	0.521	0.429
90	-	4.050	3.123	1.895	1.749	1.714	1.657	1.646	1.363	1.333	1.113	0.905	0.672	0.553	0.457
95	-	4.248	3.405	2.065	1.910	1.873	1.814	1.802	1.503	1.471	1.239	0.964	0.714	0.585	0.486
100	-	4.447	3.579	2.235	2.072	2.033	1.970	1.957	1.643	1.609	1.365	1.066	0.757	0.618	0.514
105	-	4.645	3.753	2.494	2.234	2.193	2.127	2.113	1.782	1.747	1.491	1.182	0.800	0.650	0.543
110	-	4.844	3.927	2.774	2.458	2.390	2.289	2.270	1.922	1.885	1.618	1.298	0.842	0.682	0.571
115	-	5.042	4.101	3.053	2.697	2.620	2.503	2.481	2.062	2.023	1.744	1.414	0.885	0.714	0.599
120	-	-	4.275	3.314	2.937	2.850	2.717	2.692	2.201	2.161	1.870	1.531	0.927	0.747	0.628
125	-	-	4.449	3.480	3.176	3.080	2.931	2.903	2.363	2.309	1.996	1.647	0.970	0.779	0.656
130	-	-	4.623	3.645	3.376	3.304	3.145	3.114	2.543	2.489	2.123	1.763	1.069	0.811	0.685
135	-	-	4.797	3.811	3.541	3.469	3.343	3.317	2.723	2.670	2.249	1.880	1.185	0.843	0.713
140	-	-	4.971	3.976	3.706	3.634	3.509	3.483	2.903	2.850	2.423	1.996	1.300	0.876	0.741
145	-	-	-	4.141	3.871	3.799	3.675	3.649	3.084	3.030	2.605	2.112	1.416	0.908	0.770
150	-	-	-	4.307	4.036	3.964	3.841	3.815	3.264	3.210	2.787	2.228	1.531	0.940	0.798
155	-	-	-	4.472	4.201	4.130	4.006	3.981	3.427	3.378	2.969	2.388	1.647	0.972	0.827
160	-	-	-	4.638	4.366	4.295	4.172	4.147	3.586	3.536	3.151	2.569	1.763	1.065	0.855
165	-	-	-	4.803	4.530	4.460	4.338	4.313	3.746	3.694	3.325	2.750	1.878	1.174	0.884
170	-	-	-	4.968	4.695	4.625	4.504	4.479	3.905	3.853	3.474	2.930	1.994	1.284	0.912
175	-	-	-	-	4.860	4.790	4.669	4.645	4.065	4.011	3.623	3.111	2.109	1.393	0.940
180	-	-	-	-	5.025	4.955	4.835	4.811	4.225	4.169	3.772	3.291	2.225	1.502	0.969
185	-	-	-	-	-	-	5.001	4.977	4.384	4.327	3.921	3.431	2.377	1.611	1.042
190	-	-	-	-	-	-	-	-	4.544	4.485	4.070	3.571	2.551	1.721	1.141
195	-	-	-	-	-	-	-	-	4.703	4.643	4.219	3.711	2.724	1.830	1.241
200	-	-	-	-	-	-	-	-	4.863	4.801	4.368	3.851	2.897	1.939	1.340
205	-	-	-	-	-	-	-	-	5.023	4.959	4.517	3.991	3.071	2.049	1.440
210	-	-	-	-	-	-	-	-	-	-	4.666	4.130	3.244	2.158	1.539
215	-	-	-	-	-	-	-	-	-	-	4.815	4.270	3.380	2.268	1.639
220	-	-	-	-	-	-	-	-	-	-	4.963	4.410	3.502	2.437	1.738
225	-	-	-	-	-	-	-	-	-	-	5.112	4.550	3.624	2.605	1.838
230	-	-	-	-	-	-	-	-	-	-	-	4.690	3.747	2.774	1.937
235	-	-	-	-	-	-	-	-	-	-	-	4.830	3.869	2.943	2.037
240	-	-	-	-	-	-	-	-	-	-	-	4.970	3.991	3.112	2.136
245	-	-	-	-	-	-	-	-	-	-	-	5.110	4.113	3.280	2.235
250	-	-	-	-	-	-	-	-	-	-	-	-	4.236	3.390	2.390
255	-	-	-	-	-	-	-	-	-	-	-	-	4.358	3.495	2.570
260	-	-	-	-	-	-	-	-	-	-	-	-	4.480	3.601	2.750
265	-	-	-	-	-	-	-	-	-	-	-	-	4.602	3.707	2.929
270	-	-	-	-	-	-	-	-	-	-	-	-	4.725	3.813	3.109
275	-	-	-	-	-	-	-	-	-	-	-	-	4.847	3.919	3.289
280	-	-	-	-	-	-	-	-	-	-	-	-	4.969	4.025	3.357
285	-	-	-	-	-	-	-	-	-	-	-	-	5.091	4.131	3.425
290	-	-	-	-	-	-	-	-	-	-	-	-	-	4.237	3.493
295	-	-	-	-	-	-	-	-	-	-	-	-	-	4.343	3.561
300	-	-	-	-	-	-	-	-	-	-	-	-	-	4.449	3.629
305	-	-	-	-	-	-	-	-	-	-	-	-	-	4.555	3.697
310	-	-	-	-	-	-	-	-	-	-	-	-	-	4.661	3.765
315	-	-	-	-	-	-	-	-	-	-	-	-	-	4.767	3.833
320	-	-	-	-	-	-	-	-	-	-	-	-	-	4.873	3.901
325	-	-	-	-	-	-	-	-	-	-	-	-	-	4.978	3.969
330	-	-	-	-	-	-	-	-	-	-	-	-	-	5.084	4.037
335	-	-	-	-	-	-	-	-	-	-	-	-	-	5.190	4.105
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.173
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.241
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.309
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.377
360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.445
365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.513
370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.581
375	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.649
380	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.717
385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.785
390	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.853
395	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.921
400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.989
405	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.057
410	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.125
415	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm



FIRETEX FX1003/FX2003															
Section Factor up to m ¹	Table D7: Rectangular Hollow Columns: Fire Resistance Period: 90 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
60	-	3.750	3.051	1.748	1.619	1.587	1.537	1.527	1.286	1.261	0.951	0.881	0.730	0.592	0.425
65	-	4.030	3.284	1.778	1.648	1.617	1.566	1.556	1.313	1.287	1.118	0.921	0.783	0.640	0.458
70	-	4.286	3.517	1.999	1.861	1.827	1.772	1.761	1.499	1.471	1.286	1.071	0.845	0.686	0.491
75	-	4.541	3.751	2.221	2.073	2.037	1.978	1.967	1.685	1.655	1.453	1.221	0.907	0.731	0.524
80	-	4.796	3.984	3.101	2.347	2.247	2.185	2.172	1.871	1.839	1.620	1.370	0.969	0.776	0.558
85	-	-	4.217	3.464	3.247	3.054	2.748	2.692	2.057	2.023	1.788	1.520	1.083	0.821	0.591
90	-	-	4.450	3.676	3.488	3.440	3.356	3.338	2.243	2.207	1.955	1.669	1.207	0.867	0.624
95	-	-	4.684	3.888	3.696	3.648	3.562	3.545	2.741	2.618	2.123	1.819	1.330	0.912	0.657
100	-	-	4.917	4.101	3.905	3.855	3.769	3.751	3.283	3.139	2.321	1.968	1.454	0.957	0.690
105	-	-	5.150	4.313	4.113	4.062	3.975	3.957	3.489	3.433	2.699	2.118	1.578	1.037	0.723
110	-	-	-	4.525	4.321	4.270	4.181	4.164	3.692	3.635	3.078	2.268	1.701	1.151	0.756
115	-	-	-	4.738	4.530	4.477	4.388	4.370	3.894	3.837	3.379	2.512	1.825	1.265	0.789
120	-	-	-	4.950	4.738	4.684	4.594	4.576	4.097	4.039	3.582	2.756	1.948	1.379	0.822
125	-	-	-	5.163	4.946	4.892	4.800	4.782	4.299	4.242	3.786	3.000	2.072	1.492	0.855
130	-	-	-	-	5.155	5.099	5.007	4.989	4.502	4.444	3.989	3.245	2.196	1.606	0.888
135	-	-	-	-	-	-	-	-	4.704	4.646	4.192	3.468	2.350	1.720	0.922
140	-	-	-	-	-	-	-	-	4.906	4.848	4.396	3.688	2.544	1.834	0.955
145	-	-	-	-	-	-	-	-	5.109	5.050	4.599	3.907	2.738	1.947	1.020
150	-	-	-	-	-	-	-	-	-	-	4.802	4.126	2.932	2.061	1.181
155	-	-	-	-	-	-	-	-	-	-	5.006	4.345	3.126	2.175	1.341
160	-	-	-	-	-	-	-	-	-	-	-	4.565	3.322	2.306	1.502
165	-	-	-	-	-	-	-	-	-	-	-	4.784	3.527	2.507	1.662
170	-	-	-	-	-	-	-	-	-	-	-	5.003	3.733	2.707	1.823
175	-	-	-	-	-	-	-	-	-	-	-	-	3.938	2.908	1.983
180	-	-	-	-	-	-	-	-	-	-	-	-	4.144	3.108	2.144
185	-	-	-	-	-	-	-	-	-	-	-	-	4.349	3.312	2.317
190	-	-	-	-	-	-	-	-	-	-	-	-	4.555	3.538	2.530
195	-	-	-	-	-	-	-	-	-	-	-	-	4.760	3.764	2.743
200	-	-	-	-	-	-	-	-	-	-	-	-	4.966	3.991	2.956
205	-	-	-	-	-	-	-	-	-	-	-	-	5.171	4.217	3.169
210	-	-	-	-	-	-	-	-	-	-	-	-	-	4.444	3.340
215	-	-	-	-	-	-	-	-	-	-	-	-	-	4.670	3.456
220	-	-	-	-	-	-	-	-	-	-	-	-	-	4.896	3.572
225	-	-	-	-	-	-	-	-	-	-	-	-	-	5.123	3.688
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.804
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.919
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.035
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.151
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.267
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.383
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.499
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.615
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.731
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.847
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.963
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.079
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.194
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
375	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
380	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
390	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
395	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
405	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
410	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
415	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm

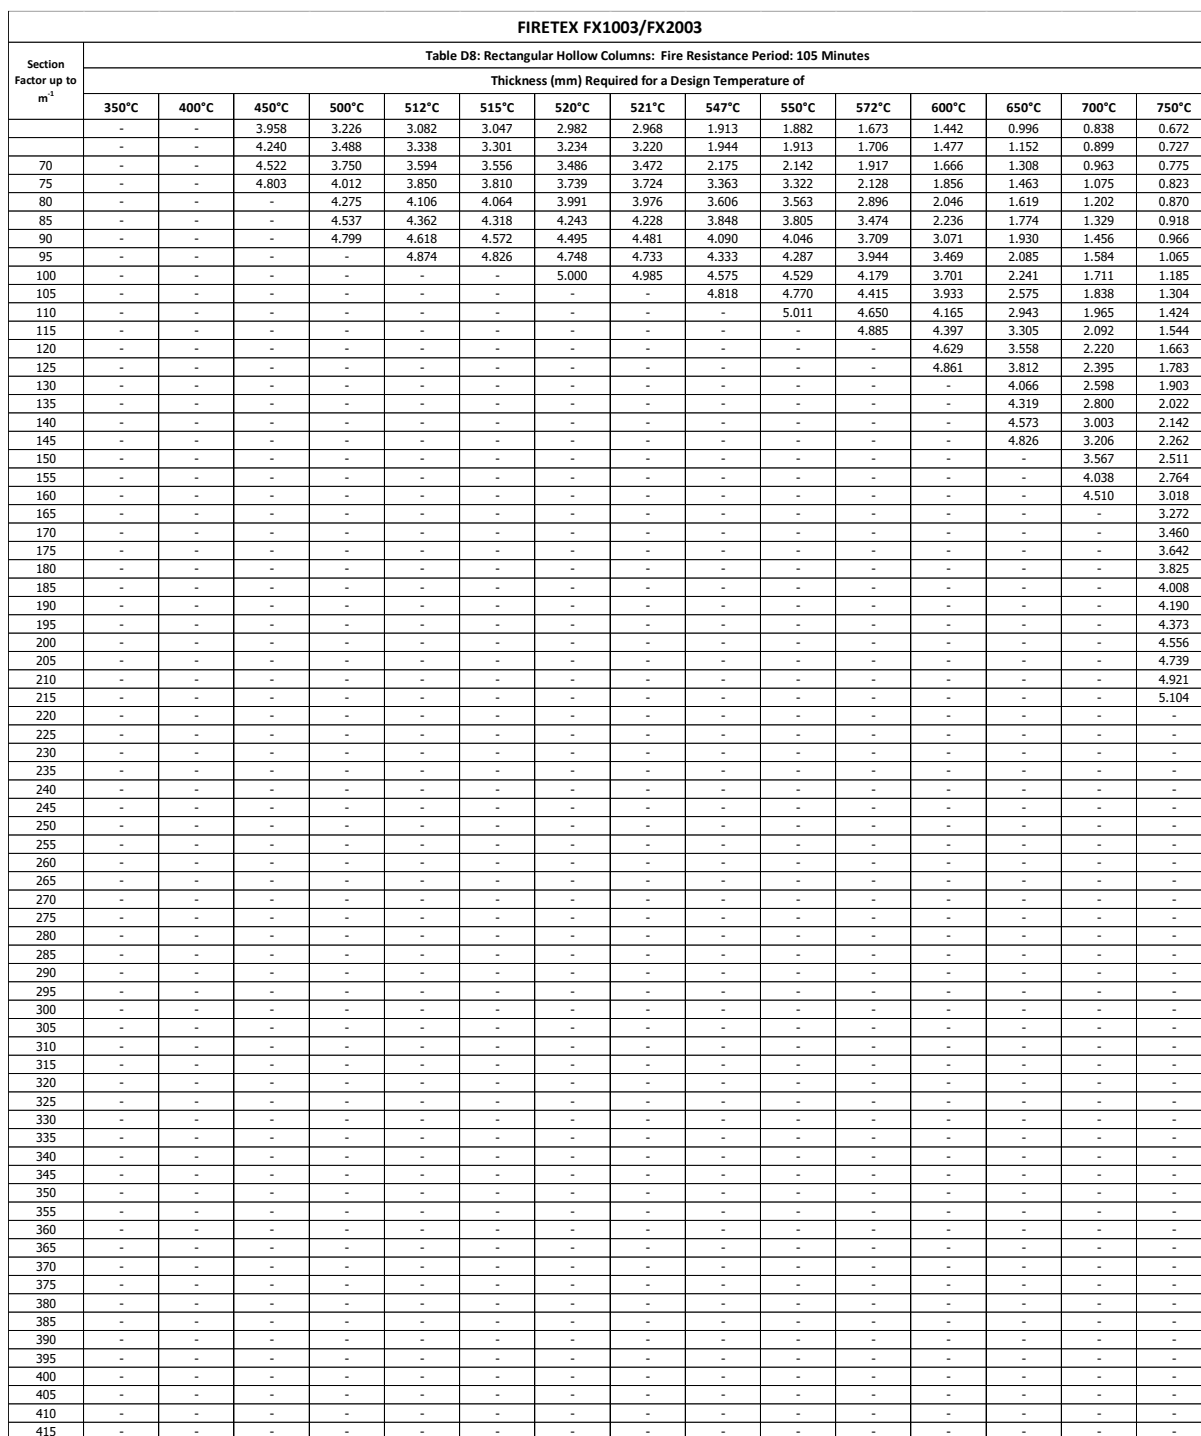


Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm



FIRETEX FX1003/FX2003															
Section Factor up to m ⁻¹	Table D9: Rectangular Hollow Columns: Fire Resistance Period: 120 Minutes														
	Thickness (mm) Required for a Design Temperature of														
	350°C	400°C	450°C	500°C	512°C	515°C	520°C	521°C	547°C	550°C	572°C	600°C	650°C	700°C	750°C
60	-	-	-	4.160	4.001	3.962	3.894	3.880	3.400	3.366	3.110	1.986	1.596	1.252	0.881
65	-	-	-	4.445	4.281	4.240	4.170	4.155	3.686	3.650	3.383	1.986	1.637	1.292	0.924
70	-	-	-	4.750	4.573	4.529	4.454	4.439	3.972	3.934	3.657	3.295	1.831	1.453	1.064
75	-	-	-	5.054	4.866	4.818	4.738	4.723	4.257	4.218	3.930	3.556	2.025	1.613	1.204
80	-	-	-	-	-	-	5.022	5.006	4.543	4.502	4.204	3.818	2.219	1.774	1.345
85	-	-	-	-	-	-	-	-	4.829	4.787	4.477	4.079	3.323	1.934	1.485
90	-	-	-	-	-	-	-	-	-	-	4.750	4.341	3.578	2.094	1.625
95	-	-	-	-	-	-	-	-	-	-	5.024	4.602	3.833	2.255	1.766
100	-	-	-	-	-	-	-	-	-	-	-	4.864	4.088	2.815	1.906
105	-	-	-	-	-	-	-	-	-	-	-	-	4.342	3.349	2.046
110	-	-	-	-	-	-	-	-	-	-	-	-	4.597	3.651	2.187
115	-	-	-	-	-	-	-	-	-	-	-	-	4.852	3.953	2.391
120	-	-	-	-	-	-	-	-	-	-	-	-	-	4.256	2.678
125	-	-	-	-	-	-	-	-	-	-	-	-	-	4.558	2.966
130	-	-	-	-	-	-	-	-	-	-	-	-	-	4.860	3.253
135	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.537
140	-	-	-	-	-	-	-	-	-	-	-	-	-	-	3.820
145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.103
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.386
155	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.669
160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4.952
165	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
170	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
180	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
185	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
195	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
370	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
375	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
380	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
390	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
395	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
400	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
405	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
410	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
415	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.

Table also applies to beams protected on four sides up to a maximum protection thickness of 2.890 mm



FIRETEX FX1003/FX2003																		
Section Factor up to m ²	Table E6: Rectangular Hollow Beams: Fire Resistance Period: 75 Minutes																	
	Thickness (mm) Required for a Design Temperature of																	
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C	750°C
45	1.271	0.913	0.626	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
50	1.440	1.026	0.760	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
55	-	1.189	0.895	0.467	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
60	-	1.352	1.029	0.607	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
65	-	1.515	1.163	0.747	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
70	-	-	1.297	0.887	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
75	-	-	1.431	1.027	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
80	-	-	1.570	1.167	0.507	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
85	-	-	1.722	1.307	0.700	0.554	0.449	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
90	-	-	1.874	1.447	0.893	0.760	0.669	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
95	-	-	2.026	1.562	1.086	0.967	0.889	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
100	-	-	2.178	1.644	1.279	1.174	1.109	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
105	-	-	2.330	1.726	1.472	1.380	1.329	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
110	-	-	2.482	1.808	1.561	1.539	1.531	0.788	0.753	0.622	0.536	0.448	0.448	0.448	0.448	0.448	0.448	0.448
115	-	-	2.634	1.890	1.609	1.585	1.575	1.313	1.275	1.129	1.028	0.551	0.486	0.448	0.448	0.448	0.448	0.448
120	-	-	-	1.972	1.658	1.631	1.619	1.546	1.544	1.533	1.520	0.958	0.881	0.714	0.511	0.448	0.448	0.448
125	-	-	-	2.054	1.707	1.676	1.663	1.581	1.578	1.566	1.557	1.366	1.275	1.080	0.838	0.448	0.448	0.448
130	-	-	-	2.136	1.755	1.722	1.707	1.616	1.612	1.598	1.588	1.544	1.536	1.446	1.165	0.599	0.448	0.448
135	-	-	-	2.218	1.804	1.767	1.751	1.650	1.646	1.631	1.620	1.572	1.565	1.548	1.492	0.837	0.448	0.448
140	-	-	-	2.300	1.853	1.813	1.795	1.685	1.680	1.663	1.651	1.601	1.594	1.577	1.551	1.075	0.465	0.448
145	-	-	-	2.383	1.901	1.859	1.839	1.719	1.715	1.696	1.683	1.630	1.623	1.605	1.579	1.313	0.605	0.448
150	-	-	-	2.465	1.950	1.904	1.883	1.754	1.749	1.728	1.714	1.659	1.651	1.634	1.608	1.529	0.745	0.448
155	-	-	-	2.547	1.998	1.950	1.927	1.788	1.783	1.761	1.746	1.688	1.680	1.662	1.636	1.556	0.886	0.448
160	-	-	-	2.629	2.047	1.995	1.972	1.823	1.817	1.794	1.777	1.717	1.709	1.691	1.664	1.584	1.026	0.521
165	-	-	-	2.711	2.096	2.041	2.016	1.857	1.851	1.826	1.808	1.745	1.738	1.719	1.692	1.611	1.166	0.631
170	-	-	-	-	2.144	2.086	2.060	1.892	1.885	1.859	1.840	1.774	1.766	1.748	1.720	1.639	1.306	0.742
175	-	-	-	-	2.193	2.132	2.104	1.926	1.919	1.891	1.871	1.803	1.795	1.777	1.749	1.666	1.447	0.852
180	-	-	-	-	2.241	2.178	2.148	1.961	1.954	1.924	1.903	1.832	1.824	1.805	1.777	1.694	1.538	0.963
185	-	-	-	-	2.290	2.223	2.192	1.995	1.988	1.956	1.934	1.861	1.853	1.834	1.805	1.721	1.564	1.073
190	-	-	-	-	2.339	2.269	2.236	2.030	2.022	1.989	1.966	1.890	1.881	1.862	1.833	1.749	1.591	1.184
195	-	-	-	-	2.387	2.314	2.280	2.064	2.056	2.022	1.997	1.919	1.910	1.891	1.861	1.777	1.618	1.294
200	-	-	-	-	2.436	2.360	2.324	2.099	2.090	2.054	2.028	1.947	1.939	1.919	1.890	1.804	1.644	1.405
205	-	-	-	-	2.485	2.405	2.369	2.134	2.124	2.087	2.060	1.976	1.968	1.948	1.918	1.832	1.671	1.515
210	-	-	-	-	2.533	2.451	2.413	2.168	2.158	2.119	2.091	2.005	1.996	1.976	1.946	1.859	1.698	1.549
215	-	-	-	-	2.582	2.497	2.457	2.203	2.193	2.152	2.123	2.034	2.025	2.005	1.974	1.887	1.725	1.574
220	-	-	-	-	2.630	2.542	2.501	2.237	2.227	2.184	2.154	2.063	2.054	2.033	2.002	1.914	1.751	1.599
225	-	-	-	-	2.679	2.588	2.545	2.272	2.261	2.217	2.186	2.092	2.083	2.062	2.031	1.942	1.778	1.624
230	-	-	-	-	2.728	2.633	2.589	2.306	2.295	2.249	2.217	2.121	2.111	2.090	2.059	1.969	1.805	1.649
235	-	-	-	-	-	2.679	2.633	2.341	2.329	2.282	2.248	2.149	2.140	2.119	2.087	1.997	1.831	1.674
240	-	-	-	-	-	2.725	2.677	2.375	2.363	2.315	2.280	2.178	2.169	2.147	2.115	2.024	1.858	1.699
245	-	-	-	-	-	-	2.721	2.410	2.397	2.347	2.311	2.207	2.198	2.176	2.143	2.052	1.885	1.724
250	-	-	-	-	-	-	-	2.444	2.432	2.380	2.343	2.236	2.226	2.204	2.172	2.079	1.911	1.749
255	-	-	-	-	-	-	-	2.479	2.466	2.412	2.374	2.265	2.255	2.233	2.200	2.107	1.938	1.774
260	-	-	-	-	-	-	-	2.513	2.500	2.445	2.406	2.294	2.284	2.262	2.228	2.134	1.965	1.799
265	-	-	-	-	-	-	-	2.548	2.534	2.477	2.437	2.323	2.313	2.290	2.256	2.162	1.992	1.824
270	-	-	-	-	-	-	-	2.582	2.568	2.510	2.468	2.351	2.341	2.319	2.284	2.189	2.018	1.849
275	-	-	-	-	-	-	-	2.617	2.602	2.543	2.500	2.380	2.370	2.347	2.313	2.217	2.045	1.874
280	-	-	-	-	-	-	-	2.652	2.637	2.575	2.531	2.409	2.399	2.376	2.341	2.244	2.072	1.899
285	-	-	-	-	-	-	-	2.686	2.671	2.608	2.563	2.438	2.428	2.404	2.369	2.272	2.098	1.924
290	-	-	-	-	-	-	-	-	2.705	2.640	2.594	2.467	2.456	2.433	2.397	2.299	2.125	1.949
295	-	-	-	-	-	-	-	-	-	2.673	2.626	2.496	2.485	2.461	2.425	2.327	2.152	1.974
300	-	-	-	-	-	-	-	-	-	-	2.657	2.525	2.514	2.490	2.454	2.355	2.178	1.999
305	-	-	-	-	-	-	-	-	-	-	2.688	2.553	2.543	2.518	2.482	2.382	2.205	2.024
310	-	-	-	-	-	-	-	-	-	-	-	2.582	2.571	2.547	2.510	2.410	2.232	2.049
315	-	-	-	-	-	-	-	-	-	-	-	2.611	2.600	2.575	2.538	2.437	2.259	2.074
320	-	-	-	-	-	-	-	-	-	-	-	2.640	2.629	2.604	2.566	2.465	2.285	2.100
325	-	-	-	-	-	-	-	-	-	-	-	2.669	2.658	2.632	2.595	2.492	2.312	2.125
330	-	-	-	-	-	-	-	-	-	-	-	2.698	2.686	2.661	2.623	2.520	2.339	2.150
335	-	-	-	-	-	-	-	-	-	-	-	-	2.689	2.651	2.547	2.365	2.175	2.000
340	-	-	-	-	-	-	-	-	-	-	-	-	-	2.679	2.575	2.392	2.200	2.025
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.602	2.419	2.225	2.050
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.630	2.445	2.250	2.075
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.657	2.472	2.275	2.100

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003																	
Section Factor up to m ²	Table E7: Rectangular Hollow Beams: Fire Resistance Period: 90 Minutes																
	Thickness (mm) Required for a Design Temperature of																
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C
45	-	1.286	0.989	0.721	0.460	0.460	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
50	-	1.460	1.116	0.807	0.577	0.524	0.496	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
55	-	-	1.303	0.980	0.736	0.685	0.658	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448	0.448
60	-	-	1.490	1.153	0.895	0.846	0.820	0.594	0.581	0.529	0.486	0.448	0.448	0.448	0.448	0.448	0.448
65	-	-	-	1.326	1.055	1.007	0.982	0.770	0.758	0.710	0.670	0.448	0.448	0.448	0.448	0.448	0.448
70	-	-	-	1.499	1.214	1.168	1.145	0.946	0.936	0.890	0.854	0.594	0.536	0.448	0.448	0.448	0.448
75	-	-	-	1.666	1.373	1.329	1.307	1.122	1.113	1.071	1.037	0.801	0.748	0.602	0.448	0.448	0.448
80	-	-	-	1.831	1.531	1.490	1.469	1.299	1.290	1.251	1.221	1.007	0.961	0.832	0.565	0.448	0.448
85	-	-	-	1.996	1.637	1.604	1.590	1.475	1.467	1.432	1.404	1.214	1.173	1.061	0.834	0.448	0.448
90	-	-	-	2.162	1.743	1.705	1.688	1.584	1.580	1.563	1.552	1.420	1.386	1.291	1.103	0.448	0.448
95	-	-	-	2.327	1.849	1.806	1.787	1.665	1.660	1.641	1.627	1.558	1.548	1.521	1.373	0.448	0.448
100	-	-	-	2.493	1.956	1.907	1.885	1.747	1.741	1.719	1.703	1.623	1.611	1.585	1.550	0.448	0.448
105	-	-	-	2.658	2.062	2.008	1.984	1.828	1.822	1.797	1.779	1.689	1.675	1.645	1.605	1.143	0.448
110	-	-	-	-	2.168	2.109	2.082	1.910	1.903	1.875	1.855	1.754	1.739	1.705	1.660	1.555	0.448
115	-	-	-	-	2.274	2.210	2.181	1.991	1.984	1.953	1.931	1.820	1.803	1.765	1.715	1.598	0.448
120	-	-	-	-	2.381	2.311	2.279	2.073	2.064	2.031	2.007	1.885	1.866	1.825	1.770	1.641	0.865
125	-	-	-	-	2.487	2.412	2.378	2.155	2.145	2.109	2.083	1.950	1.930	1.885	1.825	1.685	1.528
130	-	-	-	-	2.593	2.513	2.476	2.236	2.226	2.187	2.158	2.016	1.994	1.945	1.880	1.728	1.557
135	-	-	-	-	2.700	2.614	2.574	2.318	2.307	2.265	2.234	2.081	2.058	2.005	1.935	1.771	1.586
140	-	-	-	-	-	-	2.673	2.399	2.388	2.342	2.310	2.147	2.121	2.065	1.991	1.815	1.616
145	-	-	-	-	-	-	-	2.481	2.468	2.420	2.386	2.212	2.185	2.125	2.046	1.858	1.645
150	-	-	-	-	-	-	-	2.562	2.549	2.498	2.462	2.278	2.249	2.185	2.101	1.901	1.674
155	-	-	-	-	-	-	-	2.644	2.630	2.576	2.538	2.343	2.313	2.245	2.156	1.944	1.703
160	-	-	-	-	-	-	-	2.725	2.711	2.654	2.614	2.408	2.376	2.305	2.211	1.988	1.732
165	-	-	-	-	-	-	-	-	-	2.732	2.689	2.474	2.440	2.365	2.266	2.031	1.762
170	-	-	-	-	-	-	-	-	-	-	-	2.539	2.504	2.425	2.321	2.074	1.791
175	-	-	-	-	-	-	-	-	-	-	-	2.605	2.567	2.486	2.376	2.117	1.820
180	-	-	-	-	-	-	-	-	-	-	-	2.670	2.631	2.546	2.431	2.161	1.849
185	-	-	-	-	-	-	-	-	-	-	-	-	-	2.606	2.487	2.204	1.879
190	-	-	-	-	-	-	-	-	-	-	-	-	-	2.666	2.542	2.247	1.908
195	-	-	-	-	-	-	-	-	-	-	-	-	-	2.726	2.597	2.290	1.937
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.652	2.334	1.966
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.707	2.377	1.996
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.420	2.025
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.463	2.054
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.507	2.083
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.550	2.113
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.593	2.142
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.636	2.171
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.680	2.200
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.230
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.259
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.288
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.317
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.346
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.376
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.405
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.434
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.463
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.493
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.522
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.551
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.580
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.610
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.639
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.668
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.535
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.562
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.589
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.617
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.644
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.671
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003																	
Section Factor up to m ²	Table E8: Rectangular Hollow Beams: Fire Resistance Period: 105 Minutes																
	Thickness (mm) Required for a Design Temperature of																
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C
45	-	-	1.348	1.074	0.850	0.820	0.806	0.709	0.703	0.679	0.660	0.539	0.515	0.460	0.460	0.448	0.448
50	-	-	-	1.216	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013	1.013
55	-	-	-	1.431	1.163	1.127	1.109	1.057	1.057	1.057	1.057	1.057	1.057	1.057	1.057	1.057	1.057
60	-	-	-	-	1.369	1.331	1.313	1.229	1.224	1.201	1.183	1.102	1.102	1.102	1.102	1.102	1.102
65	-	-	-	-	1.566	1.533	1.517	1.403	1.398	1.375	1.357	1.249	1.229	1.179	1.147	1.147	1.147
70	-	-	-	-	1.738	1.696	1.679	1.565	1.561	1.543	1.530	1.426	1.407	1.359	1.283	1.191	1.191
75	-	-	-	-	1.909	1.859	1.838	1.701	1.695	1.674	1.658	1.576	1.564	1.534	1.468	1.236	1.236
80	-	-	-	-	2.081	2.022	1.998	1.836	1.829	1.805	1.787	1.692	1.677	1.643	1.596	1.408	1.281
85	-	-	-	-	2.252	2.185	2.158	1.971	1.964	1.935	1.915	1.807	1.790	1.752	1.699	1.562	1.326
90	-	-	-	-	2.424	2.348	2.318	2.106	2.098	2.066	2.043	1.923	1.904	1.860	1.801	1.647	1.370
95	-	-	-	-	2.595	2.512	2.478	2.241	2.232	2.197	2.172	2.039	2.017	1.969	1.903	1.732	1.415
100	-	-	-	-	-	-	2.637	2.376	2.366	2.328	2.300	2.154	2.131	2.078	2.005	1.816	1.577
105	-	-	-	-	-	-	-	2.511	2.501	2.458	2.428	2.270	2.244	2.186	2.107	1.901	1.641
110	-	-	-	-	-	-	-	-	2.635	2.589	2.557	2.385	2.357	2.295	2.210	1.986	1.704
115	-	-	-	-	-	-	-	-	-	-	-	2.501	2.471	2.403	2.312	2.071	1.758
120	-	-	-	-	-	-	-	-	-	-	-	2.616	2.584	2.512	2.414	2.156	1.832
125	-	-	-	-	-	-	-	-	-	-	-	2.732	2.697	2.621	2.516	2.241	1.895
130	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.618	2.326	1.959
135	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.411	2.023
140	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.496	2.086
145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.581	2.150
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.666	2.214
155	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.277
160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.341
165	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.405
170	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.468
175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.532
180	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.596
185	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.659
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.264
195	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.309
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.353
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.398
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.443
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.488
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.532
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.577
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.622
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.666
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.711
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.



FIRETEX FX1003/FX2003																		
Section Factor up to m ²	Table E9: Rectangular Hollow Beams: Fire Resistance Period: 120 Minutes																	
	Thickness (mm) Required for a Design Temperature of																	
	350°C	400°C	450°C	500°C	544°C	550°C	553°C	575°C	576°C	580°C	583°C	600°C	603°C	610°C	620°C	650°C	700°C	750°C
45	-	-	-	-	1.202	1.172	1.158	1.054	1.050	1.031	1.016	0.931	0.917	0.881	0.827	0.678	0.448	0.448
50	-	-	-	-	1.368	1.333	1.316	1.196	1.190	1.168	1.151	1.057	1.057	1.057	1.057	1.057	1.057	1.057
55	-	-	-	-	-	-	-	1.439	1.434	1.410	1.393	1.289	1.271	1.227	1.162	1.057	1.057	1.057
60	-	-	-	-	-	-	-	-	-	-	-	1.525	1.507	1.461	1.393	1.236	1.102	1.102
65	-	-	-	-	-	-	-	-	-	-	-	1.699	1.683	1.645	1.593	1.422	1.147	1.147
70	-	-	-	-	-	-	-	-	-	-	-	1.872	1.854	1.811	1.751	1.587	1.207	1.191
75	-	-	-	-	-	-	-	-	-	-	-	2.045	2.024	1.976	1.909	1.724	1.405	1.236
80	-	-	-	-	-	-	-	-	-	-	-	2.219	2.195	2.142	2.068	1.862	1.569	1.281
85	-	-	-	-	-	-	-	-	-	-	-	2.392	2.366	2.307	2.226	2.000	1.680	1.326
90	-	-	-	-	-	-	-	-	-	-	-	2.566	2.537	2.473	2.384	2.137	1.791	1.574
95	-	-	-	-	-	-	-	-	-	-	-	-	-	2.639	2.542	2.275	1.902	1.659
100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.413	2.013	1.745
105	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.550	2.124	1.830
110	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.235	1.916
115	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.346	2.001
120	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.457	2.087
125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.568	2.172
130	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.679	2.258
135	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.343
140	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.429
145	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.514
150	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.600
155	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.951
160	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.996
165	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.041
170	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.085
175	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.130
180	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.175
185	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.219
190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.264
195	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.309
200	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.353
205	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.398
210	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.443
215	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.488
220	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.532
225	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.577
230	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.622
235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.666
240	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	2.711
245	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
250	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
255	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
260	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
265	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
270	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
275	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
280	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
295	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
300	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
305	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
310	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
315	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
320	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
325	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
335	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
340	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
350	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
355	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Table applies to columns with protection to all sides. Thickness is intumescent only.