



HIGH-PERFORMANCE DECORATIVE INTERIOR MARINE DECKING

Sherwin-Williams SeaGuard Decorative Color Flake System is an ultra-high-solids, low-odor, seamless and decorative, durable system qualified to U.S. Navy decking specifications and designed to maximize performance and minimize environmental impact. SeaGuard Decorative Color Flake System is ideal for both wet and dry spaces and allows for easy application on properly prepared surfaces, including steel, aluminum, sealed underlayment and properly cured primers.

QUALIFIED TO MIL-PRF-32584, DECK COVERING MATERIALS MONOLITHIC

Type IV: Chemical-resistant flooring, underlayment required

Class 1: Shipboard use

Class 2: Submarine use

Grade A: All system coatings have a VOC content of less than 250 g/L

Composition E: Epoxy

Qualified under MIL-PRF-32584 for up to 100 percent color flake addition.

Meets IMO 2010 FTP Code Parts 2 and 5 of Annex 1.

SeaGuard Grout Coat is qualified to ANSI A118.10, American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-set Ceramic Tile and Dimension Stone Installation — 2014, **allowing it to serve as a waterproof membrane in wet spaces**. This approval eliminates the need for an additional waterproof membrane coat often required by competitive systems. Using SeaGuard Grout Coat **reduces the number of coats**, saves schedule and labor, and provides overall system cost savings.

BENEFITS



EASE OF APPLICATION

- Excellent working times
- Ultra-lightweight (ULW) underlayment designed for superior workability via trowel
- Ideal recoat windows for maximum productivity
- Reduced number of coats



PERFORMANCE

- Approved for both surface ships and submarines
- Approved for use in wet spaces, such as heads and showers
- Tough, durable, seamless finish



SUSTAINABILITY

- Low VOC
- Bio-renewable
- Ultra-high-solids coatings with less than 250 g/L VOC
- Crystalline silica free



AESTHETICS

- Custom decorative options including logo designs and fleet colors
- Safety markings/stripping

FROM SPEC TO PROTECT


sherwin-williams.com/protective

SEAGUARD® DECORATIVE COLOR FLAKE SYSTEM

INTERIOR MARINE DECKING

SYSTEM LAYERS

- 1 Substrate: Steel or Aluminum Deck
- 2 SeaGuard Bond Coat
- 3 SeaGuard ULW Underlayment
- 4 SeaGuard Grout Coat
- 5 SeaGuard Epoxy Color Coat
- 6 SeaGuard Clear Sealer

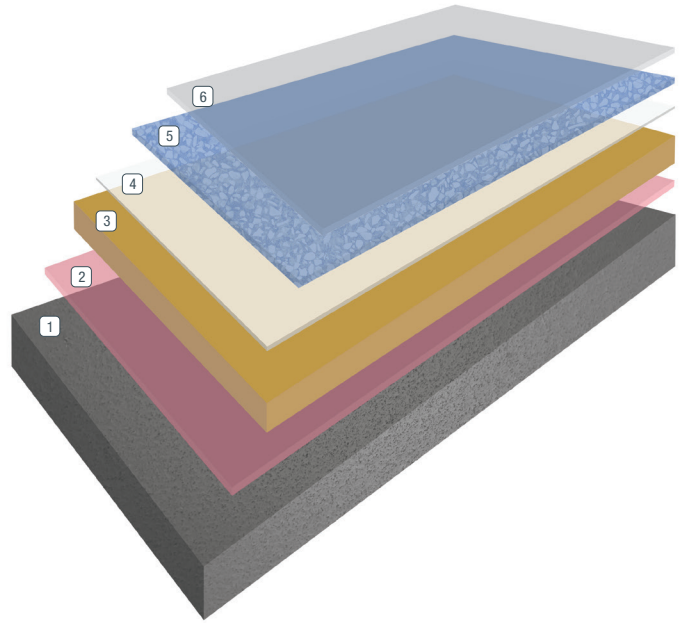

FEATURES

- Recommended uses include wet spaces, galleys, passageways and areas where deck irregularities are present. It is also used to create slope-to-drain areas.
- This system is formulated for excellent flexibility and adhesion to steel and aluminum decks.
- The revolutionary bio-renewable underlayment is designed to fair and level decks (or slope-to-drain).
- Vibrant epoxy pigments and vinyl flakes allow for a wide variety of design options.

UNMATCHED DISTRIBUTION AND SERVICE

Products You Need Right Now

Get the products you need with same- or next-day delivery and gain access to local inventory at more than 5,000 company-owned distribution points in North America.

Technical Service for Optimal Applications

Our technical service team brings extensive technology and product knowledge, as well as manufacturer equipment training, to ensure proficiency throughout the entire coatings process.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams Protective & Marine delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe. Our broad portfolio of high-performance coatings and systems that excel at combating corrosion helps customers achieve smarter, time-tested asset protection. We serve a wide array of markets across our rapidly growing international distribution footprint, including Oil & Gas, Water & Wastewater, Bridge & Highway, Steel Fabrication, Flooring, Food & Beverage, Fire Protection, Marine, Rail and Power.

North America

sherwin-williams.com/protective
swprotective@sherwin.com

SHERWIN-WILLIAMS®

©2023 The Sherwin-Williams Company
Protective & Marine Coatings
PM-919007-SS 5/23