

RESUFLOR™ TOPCOAT HTS


Resuflor Topcoat HTS is an epoxy resin based coating system with a light textured urethane topcoat. The system provides a highly durable satin finish with high chemical resistance and UV stability. Well suited to use in laboratories, cleanrooms, precision manufacturing and many other areas requiring a fine textured, chemical resistant floor finish.

BENEFITS

- Lightly textured profile reduces slip potential
- High chemical resistance
- Resistant to many solvents, fuels and Skydrol
- Durable finish
- Satin finish
- UV stable
- Seamless
- Hygienic

USES

- Aircraft hangars
- Aerospace manufacturing
- Automotive manufacturing
- Semiconductor manufacturing
- Electronics manufacturing
- Pharmaceutical manufacturing
- Chemical plants
- Workshops
- Laboratories
- Cleanrooms

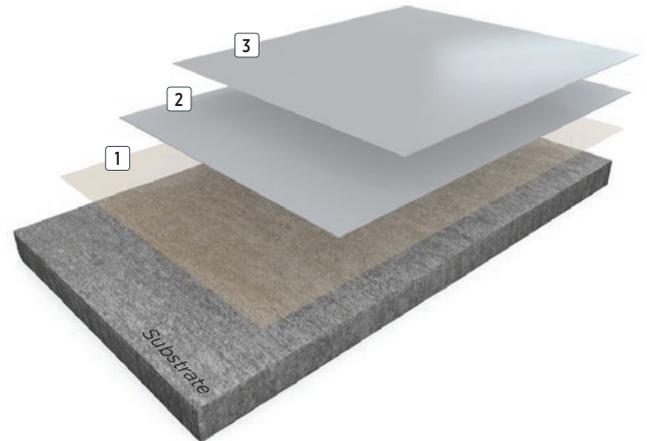

3 Topcoat: **Resutile™ HTS**

2 Base coat: **Resuflor HB**

1 Primer: **Resuprime™ ST**

0.5mm



FEATURED COLOURS



Canada Grey



Light Grey



Black



Sandy Beige



Rich Green



Regal Blue



Rotunda Red



White



Bright Yellow



Steel Grey



Charcoal



Tile Red

* Also available in **Safety Red** and **Safety Yellow**.

This reproduction approximates the actual colour. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat, or method of application may cause colour variance. Substituting other manufacturers' colours may not be representative of our blends. Contact your Sherwin-Williams representative for details.

SYSTEM COMPOSITION

Coat	Product options	Theoretical consumption kg/m ²	Application
Primer	Resuprime TM ST	0.3	Squeegee/Roller
Build coat	Resuflo TM HB	0.5	Squeegee/Roller
Topcoat	Resutile TM HTS	0.12	Roller

Approximate thickness: 0.5mm

TYPICAL CURE TIMES

Temperature	10°C	20°C	30°C
Foot traffic	24 hrs	24 hrs	24 hrs
Full traffic	48 hrs	48 hrs	48 hrs
Full chemical cure	14 days	14 days	14 days

CHEMICAL RESISTANCE

Chemical	7 days exposure
Hydrochloric Acid 30%	No change
Acetic Acid 10%	No change
Citric Acid 10%	No change
Oleic Acid	No change
Sodium Hydroxide 50%	No change
Ethylene Glycol (Antifreeze)	No change
JP-4 Jet Fuel	No change
Skydrol 500B	No change
Skydrol LD4	No change
Sodium Chloride 20%	No change

TYPICAL PHYSICAL PROPERTIES

Abrasion resistance	ASTM D4060	CS-17 wheel, 1000gm load, 1000 cycles – 11.7 mg loss
Compressive strength	BS EN ISO 604:2003	9.6 MPa
Tensile strength	BS EN ISO 527 - 2:2012	3.6 MPa
Flexural strength	ISO 178:2010	3.2 N/mm ²
Bond strength	BS EN 13892 - 8:2002	>3 N/mm ² (substrate failure)
Impact resistance	BS EN 1504-2:2004	Class II
Temperature resistance	Temperatures up to 60°C	
Chemical resistance	Excellent	
Reaction to fire	BS EN 13501 - 1:2018	B _{fl} - s1
Slip resistance	BS EN 16165:2021	Wet 24, Dry 99

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

FIND YOUR
LOCAL CONTACT

