RESUFLOR™ TOPCOAT SR3 ST

Resuflor Topcoat SR3 ST is a UV stable floor system with a medium/heavy slip resistant texture for application as a durable coating for all areas where a high chemical resistant floor is required. Applied by squeegee and roller the system is a proven solution for automotive and aviation workshops as well as manufacturing facilities.

BENEFITS

- UV colour stability
- Gloss finish
- Slip resistant
- High chemical resistance
- Hygienic
- Easy application
- Seamless
- Available in a wide range of colours

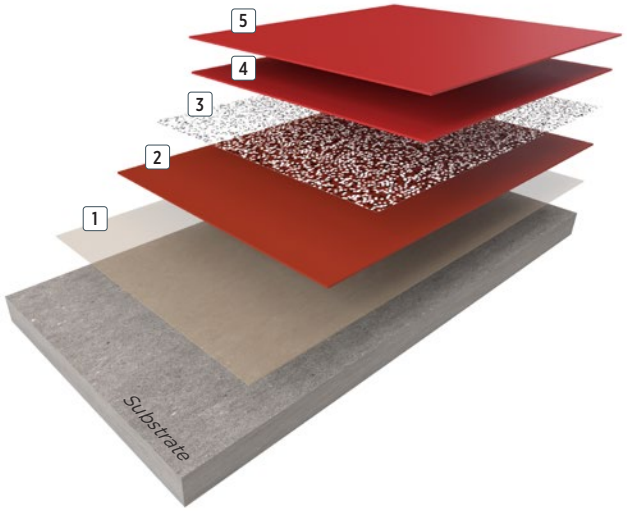

5 Seal coat: **Resutile™ ST Colour**

4 Topcoat: **Resuflor HB Coloured**

3 Broadcast: **0.6 - 1.2mm Quartz sand**

2 Base coat: **Resuflor HB**

1 Primer: **Resuprime™ ST**

1.5mm

USES

- Automotive workshops
- Automotive manufacturing
- Plant rooms
- Engineering workshops
- Aerospace manufacturing
- Hangars
- Paper manufacturing
- Heavy manufacturing
- Warehouses
- Pharmaceutical manufacturing
- Chemical plants
- Wash bays



FEATURED COLOURS (also available in a range of RAL colours)


White


Stirling


Flint


Black


Buff


Savannah


Marigold


Kingfisher


Poppy Red


Salsa


Forest Green


Tuscan Glade

This reproduction approximates the actual colour. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat, or method of application may cause colour variance. Substituting other manufacturers' colours may not be representative of our blends. Contact your Sherwin-Williams representative for details.

SYSTEM COMPOSITION

Coat	Product options	Theoretical consumption kg/m²	Application
Primer	Resuprime™ ST	0.30	Squeegee / roller
Base coat	Resuflor HB	0.50	Squeegee / roller
Broadcast	0.6 - 1.2mm Quartz sand	0.5	Scatter
Topcoat	Resuflor HB Coloured	0.6	Squeegee / roller
Seal coat	Resutile™ ST Colour	0.2	Squeegee / roller
Approximate thickness: 1.5mm			

TYPICAL CURE TIMES

Temperature	10°C	20°C	30°C
Foot traffic	24 - 36 hrs	24 hrs	8 - 12 hrs
Full traffic	48 - 72 hrs	72 hrs	16 - 24 hrs
Full chemical cure	10 days	7 days	5 days

CHEMICAL RESISTANCE

Chemical	3 days exposure
Skydrol	No change
Hyjet	No change
Kerosene	No change
Toluene	No change
Xylene	No change
Ehtanol	No change
Methyl Ethyl Ketone (MEK)	No change
Acetone	No change
Acetic Acid 10%	No change
Sodium Chloride	No change

TYPICAL PHYSICAL PROPERTIES

Abrasion resistance	ASTM D4060 - 14	67mg loss per 1000 cycles
Compressive strength	BS EN ISO 604:2003	9.6 MPa
Tensile strength	BS EN ISO 527 - 2:2012	3.6 MPa
Flexural strength	BS EN ISO 178:2010+A1:2013	3.2 N/mm²
Bond strength	BS EN 13892 - 8:2002	>3 N/mm² (substrate failure)
Temperature resistance	Temperatures up to 60°C	
Chemical resistance	High	
Reaction to fire	BS EN 13501-1:2018	B_{fl} – s1
Slip resistance	BS 7976 - 2:2002+A1:2013	>36
FeRFA category	4	

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

FIND YOUR LOCAL CONTACT

resinflooring.sherwin.eu

02.25 HPF0076/01