

RESUFLOOR™ TOPFLOOR SL SR2


Resuflor Topfloor SL SR2 includes a self-levelling epoxy resin broadcast with a 0.3-0.8mm quartz sand and sealed with a high-build epoxy coating. The system provides a slip-resistant, gloss finish which is resistant to chemical attack and abrasion. The system is well suited to a variety of industrial and commercial uses.

BENEFITS

- Slip-resistant
- Gloss finish
- Reflective finish
- Hard wearing
- Hygienic
- Good chemical resistance
- Good colour stability
- Low odour
- Seamless
- Impermeable
- Available in a wide range of colours

USES

- Automotive manufacturing
- Automotive workshops
- Pharmaceutical manufacturing
- Aerospace manufacturing
- Hangars
- Engineering workshops
- Paper manufacturing
- Heavy manufacturing
- Warehouses
- Commercial premises
- Corridors
- Data centres
- Prisons
- Custodial suites

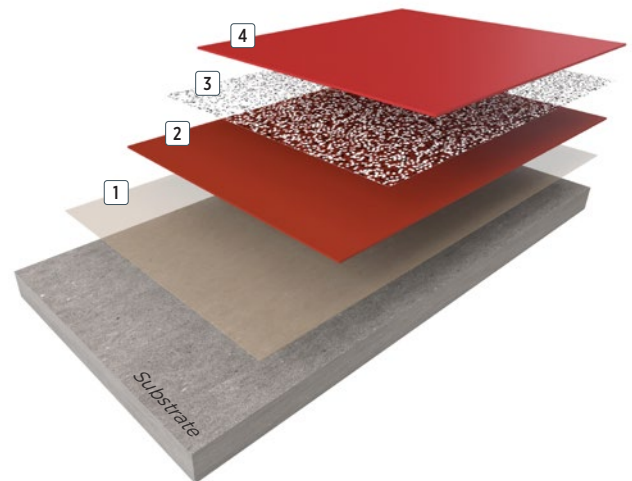

4 Topcoat: **Resuflor HB Coloured**

3 Broadcast: **0.3 - 0.8mm quartz sand**


2 Base: **Resuflor SLX**

1 Primer: **Resuprime™ ST**

3mm



FEATURED COLOURS (also available in a range of RAL colours)



White



Stirling



Flint



Black



Buff



Savannah



Marigold



Kingfisher



Poppy Red



Salsa



Forest Green



Tuscan Glade

This reproduction approximates the actual colour. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat, or method of application may cause colour variance. Substituting other manufacturers' colours may not be representative of our blends. Contact your Sherwin-Williams representative for details.

SYSTEM COMPOSITION

Coat	Product options	Theoretical consumption kg/m ²	Application
Primer	Resuprime™ ST	0.3	Squeegee / Roller
Base	Resufloor SLX	5.7	Trowel / Spiked roller
Broadcast	0.3 - 0.8mm quartz sand	6	Broadcast
Topcoat	Resufloor HB Coloured	0.3	Squeegee / Roller
Approximate thickness: 3mm			

TYPICAL CURE TIMES

Temperature	10°C	20°C	30°C
Foot traffic	24 - 36 hrs	12 - 16 hrs	8 - 12 hrs
Full traffic	48 - 72 hrs	24 - 36 hrs	16 - 24 hrs
Full chemical cure	10 days	7 days	5 days

CHEMICAL RESISTANCE

Chemical	3 days exposure
Spor-Klenz	No change
DyClean	No change
Assurance	No change
Windex	No change
Simple Green	No change
Super Shine All	No change
Liquinox	No change
3M Stainless Steel	No change
CIP 100	No change
Decon-Quat 100	No change

TYPICAL PHYSICAL PROPERTIES

Abrasion resistance	ASTM D4060	CS-17 wheel, 1000gm load, 1000 cycles - 140 mg loss
Compressive strength	BS EN ISO 604:2003	9.6 MPa
Tensile strength	3.6 N/mm ²	
Flexural strength	BS EN 13892-2:2002)	3.2 MPa
Bond strength	BS EN 13892 - 8:2002	>3 N/mm ² (substrate failure)
Impact resistance	BS EN 1504-2:2004	Class II
Temperature resistance	Tolerant of temperatures up to 60°C	
Chemical resistance	Good	
Reaction to fire	BS EN 13501 - 1:2018	B _{fl} -s1
FeRFA category	5	

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

