


RESUFLOOR™ MECHANICAL ROOM SB

Sherwin-Williams Resufloor Mechanical Room SB

is a flexible, reinforced flooring system. It is comprised of a prime coat of a flexible waterproofing membrane applied at 3-5 mils, two additional applications. This is followed by two additional applications of the same coating at 20 mils per coat, followed by a broadcast of silica sand. The grout coat is a high solids epoxy applied at 15 mils, finished with a topcoat of light-stable, satin finish urethane for added chemical resistance and durability.

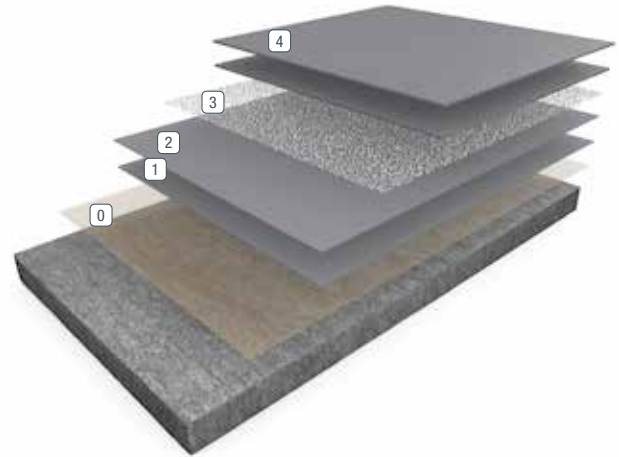

BENEFITS

- Bridges hairline cracks in concrete
- Absorbs substrate movement and vibration
- Durable and slip resistant
- Waterproof
- Chemical and stain resistant
- LEED® v4 compliant

USES

- Mechanical equipment rooms
- Mezzanines
- Clean rooms
- Locker rooms and showers
- Computer rooms

- ① Primer
- ② Membrane Build Coat
- ③ Flexible Broadcast Coat
- ④ Broadcast
- ⑤ Grout Coat and Topcoat

TYPICAL PHYSICAL PROPERTIES

Abrasion ASTM D 4060, CS-17 Wheel, 1,000 cycles	18 mg/loss Result based on independent lab testing of Resutile™ HTS
Hardness, Shore A (epoxy) ASTM D 2240	85 @ 0 sec 80 @ 15 sec
Hardness, Shore D (epoxy) ASTM D 2240	40 @ 0 sec 35 @ 15 sec
Tensile Strength (7 mils, 3-day cure) ASTM D2370	18,530 psi
Elongation (7 mils, 3-day cure) ASTM D2370	125%
Adhesion ACI 503R	300 psi concrete failure
Flammability ASTM D635	182 mm/min

Results are based on conditions at 77°F

INSTALLATION

Sherwin-Williams High Performance Flooring materials shall only be installed by approved contractors. The following information is to be used as a guideline for the installation of the Resuflo Mechanical Room SB. Contact the Sherwin-Williams Technical Service Department for assistance prior to application.

SURFACE PREPARATION — GENERAL

Sherwin-Williams systems can be applied to a variety of substrates if the substrate is properly prepared. Preparation of surfaces other than concrete will depend on the type of substrate, such as wood, concrete block, quarry tile, etc. Should there be any questions regarding a specific substrate or condition, please contact the Sherwin-Williams Technical Service Department prior to starting the project. Refer to Surface Preparation Form G-1.

SURFACE PREPARATION — CONCRETE

Concrete surfaces shall be abrasive blasted to remove all surface contaminants and laitance. The prepared concrete shall have a surface profile depending upon system selected. Refer to Form G-1.

After initial preparation has occurred, inspect the concrete for bug holes, voids, fins and other imperfections. Protrusions shall be ground smooth while voids shall be filled with a system compatible filler. For recommendations, consult the Sherwin-Williams Technical Service Department.

TEMPERATURE

Throughout the application process, substrate temperature should be 50-90°F. Substrate temperature must be at least 5°F above the dew point. Applications on concrete substrate should occur while temperature is falling to lessen offgassing. The material should not be applied in direct sunlight, if possible. Protect material from freezing prior to installation.

APPLICATION INFORMATION — SURFACE PREP PROFILE CSP 3-5

VOC MIXED	APPLICATION STEP	MATERIAL	MIX RATIO	THEORETICAL COVERAGE	PACKAGING
<200 g/L	Primer	Flex	1:1	321-535 sq ft / gal	10 gals
<200 g/L	Membrane Build Coat	Flex	1:1	80 sq ft / gal	10 gals
<200 g/L	Broadcast Coat	Flex	1:1	80 sq ft / gal	10 gals
0 g/L	Broadcast	5310-8 Dry Silica Sand (20-40 mesh)	NA	0.4-0.5 lbs / sq ft	50 lbs
<100 g/L 0	Grout Coat	MPE	2:1	107 sq ft / gal	5, 15, 165 or 750 gals
<50 g/L	Topcoat	HTS 100	2:1	500 sq ft / gal	1.09 or 5.5 gals

ALTERNATIVE SYSTEM #1

<200 g/L	Primer	FLP	1:1	300 sq ft / gal	10 gals
<200 g/L	Broadcast Coat	FLB	NA	50 sq ft / gal	5 gals
0 g/L	Broadcast	5310-8 Dry Silica Sand (20-40 mesh)	NA	0.4-0.5 lbs / sq ft	50 lbs
<100 g/L 0	Grout Coat	MPE	2:1	107 sq ft / gal	5, 15, 165 or 750 gals
<50 g/L	Topcoat	HTS 100	2:1	535 sq ft / gal	1.09 or 5.5 gals

GENERAL PRODUCT INFORMATION

OPTIONS: Colors in Resufloor Flex: Use colorants at a rate of one unit per 4-gallon mix. Standard Colorants in White, Yellow and Light Gray will not impart total hide. Use these colorants at a rate of two units per 4-gallon mix.

Colors in Resufloor MPE: Use colorants at a rate of one unit per 3-gallon mix. Standard Colorants in White, Yellow and Light Gray will not impart total hide. Use these colorants at a rate of two units per 3-gallon mix. Similar colorants also may not hide as well. Refer to Color Selection Guide or consult Technical Support.

Colors in Resutile HTS 100: Use Colorants at a rate of one unit per 1-gallon mix. Standard Colorants in White, Yellow and Sandy Beige will not impart total hide. Similar colorants also may not hide as well. Refer to Color Selection Guide or consult Technical Support.

LIMITATIONS: Contamination (Fisheyes): Product may fisheye if oil, silicones, mold release agents or other contaminants are present.

Properties of Resufloor Flex: Product designed as primer and build coat only. For enhanced chemical resistance and wear characteristics, product must be topcoated. Thin urethanes should not be applied directly to Resufloor Flex where there is going to be traffic of any kind. The differences in flexibility may lead to premature wear or bond issues.

APPLICATION - PRIMER - RESUFLOOR FLEX

A thin coat of primer will wet out concrete, help seal off concrete pores and minimize outgassing bubbles. Apply a tight coat of primer with a clean, flexible squeegee. Backrolling is not recommended. There should be no mil build over the high spots of the concrete.

COVERAGE RATE will depend upon coating thickness. Much of this will soak into porous concrete. A gallon of Resufloor Flex will cover:

535 sq.ft. @ 3 mils wet/dry film

400 sq.ft. @ 4 mils wet/dry film

321 sq.ft. @ 5 mils wet/dry film

PREMIX PART A using a Jiffy® mixer blade and slow speed drill. (Premixing is required for both 2- and full- filled 5-gallon units.) For full-filled, 5-gallon pails, pour out no more than 2 gallons into a measuring container. Then, pour the measured Part A into a mixing pail.

ADD RESUFLOOR FLEX PART B TO PART A (4 GALLONS TOTAL MIX). For full-filled 5-gallon pails, pour out 2 gallons B into a measuring container that is separate from the one used with the Part A. Then, add the measured Part B to the Part A already in the mixing pail. **POTLIFE:** Mix only enough material which can be applied within the work time (time between the addition of Part B to Part A and the completion of all application actions). Check the following chart for work times at various temperatures. For smaller quantities, use 1 part A to 1 part B by volume.

APPROXIMATE WORK TIME

65°F	70°F	75°F	80°F	90°F
40 min	30 min	25 min	20 min	15 min

MIX FOR 2 MINUTES using a Jiffy® mixer blade and slow speed drill. (Failure to do so could result in lower/diminished properties.)

PUSH THE FLAT SQUEEGEE at an even speed with sufficient down pressure to apply the thinnest coat. **NOTE:** The use of spiked shoes will allow freedom of movement on the wet floor. **CAUTION:** The surface will be slippery.

START THE SECOND AND REMAINING PASSES by pushing material parallel to the first stroke. Hold the bead of material near the center of the bar. **NOTE:** Resufloor Flex applied thin may “bridge” holes and cracks momentarily before soaking in--make sure the previously squeegeed area is overlapped (halfway).

TO REDUCE OUTGASSING BUBBLES, it is best to wait until the primer has set up enough to walk on before applying the build coat of Resufloor Flex.

The primer must be coated within 24 hours at floor temperatures 65°F-90°F.

APPLICATION - MEMBRANE BUILD COAT - RESUFLO FLEX

COVERAGE RATE: A gallon of Resuflo Flex will cover: 80 sq ft at 20 mils wet/dry film.

REPEAT STEPS used for mixing and spreading of the primer coat. A 3/16" notched squeegee can be used to increase the thickness applied.

COLORS: Premix Colorants to ensure uniform color. Colorant is added at the rate of 1 unit per 4-gallons mix. **NOTE:** When using colorant in the bulk units, add the colorant to the Part A that has been measured into the "mixing pail".

BACK ROLL THE MATERIAL with a 3/8" nap roller for a smooth uniform appearance. Backrolling is required to remove the puddles and squeegee lap marks in order to obtain uniform texture and a consistent mil thickness. **NOTE:** Get off the Resuflo Flex as soon as possible.

Allow the first build coat of Resuflo Flex to set until you can walk on it.

APPLICATION - FLEXIBLE BROADCAST COAT - RESUFLO FLEX

COVERAGE RATE: A gallon of Resuflo Flex will cover: 80 sq ft at 20 mils wet/dry film

Allow the build coat of Resuflo Flex to set until you can walk on it.

REPEAT STEPS used for mixing and spreading of the primer coat. A 1/16" notched squeegee can be used to increase the thickness applied.

APPLICATION - BROADCAST - SILICA SAND

IMMEDIATELY BROADCAST TO EXCESS WITH SILICA SAND into the uncured Resuflo Flex resin on the floor. Do not dump or pile the material. Gently scatter it onto the floor by hand tossing so as to cover the wet resin completely. A mechanical blower can be used to scatter silica sand. A coverage rate of 0.4 to 0.5 pounds per sq.ft. of silica sand is recommended.

ALLOW SYSTEM TO CURE 8-10 hours at 75°F.

THOROUGHLY SWEEP AND VACUUM to remove loose silica sand granules from surface. **DO NOT** reuse swept and vacuumed silica sand unless you have taken extra precautions.

TO AVOID INDENTATION/COMPRESSION of heavy objects, Resuflo Flex must be coated with a minimum of 8 mils of Resuflo MPE before traffic or a thin urethane is applied. Resuflo Flex should be set before applying Resuflo MPE. Resuflo Flex must be coated with Resuflo MPE at floor temperatures of 65-90°F within 24 hours.

DESIGNED TO PERFORM

APPLICATION - GROUT COAT - RESUFLO MPE

COVERAGE RATE: A gallon of Resuflo MPE will cover:

107 sq ft at 15 mils wet/dry film

Allow the broadcast coat of Resuflo Flex to set until you can walk on it.

PREMIX PART A using a Jiffy® mixer blade and slow speed drill. (This is required for both 3-gallon and full-filled 5-gallon units.) For full-filled 5 gallon pails, pour out 2 gallons into a measuring container. Then, pour the measured Part A into a mixing pail.

ADD RESUFLO MPE PART B TO PART A (3 GALLONS TOTAL MIX). For full-filled 5-gallon pails, pour out 1 gallon Part B into a measuring container that is separate from the one used with the Part A. Then, add the measured Part B to the Part A already in the mixing pail.

POTLIFE: Mix only enough material which can be applied within the work time (time between the addition of Part B to Part A and the completion of all application actions). Check the following chart for work times at various temperatures. For smaller quantities, use 2 parts A to 1 part B by volume.

APPROXIMATE WORK TIME

65°F	70°F	75°F	80°F	90°F
40 min	30 min	25 min	20 min	15 min

MIX FOR 2 MINUTES using a Jiffy® mixer blade and slow speed drill. (Failure to do so could result in lower/diminished coating properties.)

IMMEDIATELY POUR ALL OF THE MIXED MATERIAL onto the floor in a single bead.

PUSH THE FLAT SQUEEGEE at an even speed with sufficient down pressure to apply the thinnest coat. **NOTE:** The use of spiked shoes will allow freedom of movement on the wet floor.

START THE SECOND AND REMAINING PASSES by pushing material parallel to the first stroke. Hold the bead of material near the center of the bar. **NOTE:** Resuflo MPE applied thin may "bridge" holes and cracks momentarily before soaking in—make sure the previously squeegeed area is overlapped (halfway).

BACKROLL THE MATERIAL with a 3/8" nap roller for a smooth, uniform appearance. Backrolling is required to remove the puddles and squeegee lap marks in order to obtain uniform texture and a consistent mil thickness.

APPLICATION - TOPCOAT - RESUTILE™ HTS 100

PREMIX PART A FOR 3 MINUTES USING A JIFFY® MIXER BLADE with slow speed drill. **POTLIFE:** Mix only enough material which can be used in a two-hour period. **NOTE:** Once opened, this material cannot be resealed for later use.

COLORS: Premix Colorant before adding to Resutile HTS 100 to ensure uniform color. Add colorant to Resutile HTS 100 Part A and mix using a Jiffy® mixer blade and slow speed drill. Use colorants at a rate of one unit per 1-gallon unit of Resutile HTS 100.

POUR PART C INTO PART A while mixing.

CONTINUE TO MIX AND ADD PART B. MIX FOR 3 MINUTES using a Jiffy® mixer blade and slow speed drill. Pour into application tray.

APPLY RESUTILE HTS 100 at the rate of 500 sq.ft./gallon with a 3/8" nap roller. For proper appearance and development of physical properties, it is crucial that material is not applied above or below this rate. Dip the roller in the coating and lightly roll out excess in the application tray. Apply two 8-10 foot long paths on the concrete, making one stroke left to right and one right to left. Rewet the roller and apply two more paths adjacent to the first pair. Rewet roller and apply a third pair adjacent to the second.

SPREAD THE MATERIAL evenly with V-shaped cross passes.

MAKE SURE THE FLOOR HAS JUST ENOUGH COATING TO COVER EVENLY. Excess material could cause the floor to blister, especially in high humidity. Insufficient material will cause the floor to look non-uniform.

LEVEL THE AREA with straight passes that cross the initial material paths. These final strokes will reduce roller marks. If the appearance is not satisfactory, reroll the area.

REMIX THE MATERIAL in the tray occasionally (with the roller) to prevent settling of the Part C (filler).

NOTE: When multiple applicators are used to apply material, inconsistencies between areas may result. To ensure a more uniform finish, an individual outfitted with spike shoes may finish by pushing or pulling a roller across all applicator areas.

ALLOW COATING TO DRY 24 HOURS at 75°F, 50% relative humidity before opening to light traffic. Allow more time at low temperatures, low humidity or for heavier traffic. Full coating properties take 7-14 days to develop.

CLEANUP

Clean up mixing and application equipment immediately after use. Use toluene or xylene. Observe all fire and health precautions when handling or storing solvents.

SAFETY PRECAUTIONS

Refer to the SDS before use. Published technical data and instructions are subject to change without notice. Contact your Sherwin-Williams representative for additional technical data and instructions.

MATERIAL STORAGE

Store materials in a temperature controlled environment (50-90°F) and out of direct sunlight. Keep resins, hardeners and solvents separated from each other and away from sources of ignition.

MAINTENANCE

Occasional inspection of the installed material and spot repair can prolong system life. For specific information, contact the Sherwin-Williams Technical Service Department.

DISCLAIMER

The information and recommendations set forth in this document are based upon tests conducted by or on behalf of The Sherwin-Williams Company. Such information and recommendations set forth herein are subject to change and pertain to the product offered at the time of publication.

Consult www.sherwin-williams.com/resin-flooring to obtain the most recent Product Data information and application instructions.

WARRANTY

The Sherwin-Williams Company warrants our products to be free of manufacturing defects in accord with applicable Sherwin-Williams quality control procedures. Liability for products proven defective, if any, is limited to replacement of the defective product or the refund of the purchase price paid for the defective product as determined by Sherwin-Williams.

NO OTHER WARRANTY OR GUARANTEE OF ANY KIND IS MADE BY SHERWIN-WILLIAMS, EXPRESSED OR IMPLIED, STATUTORY, BY OPERATION OF LAW OR OTHERWISE, INCLUDING MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com