


HYBRI-FLEX FLOORING

POLY-CRETE SL

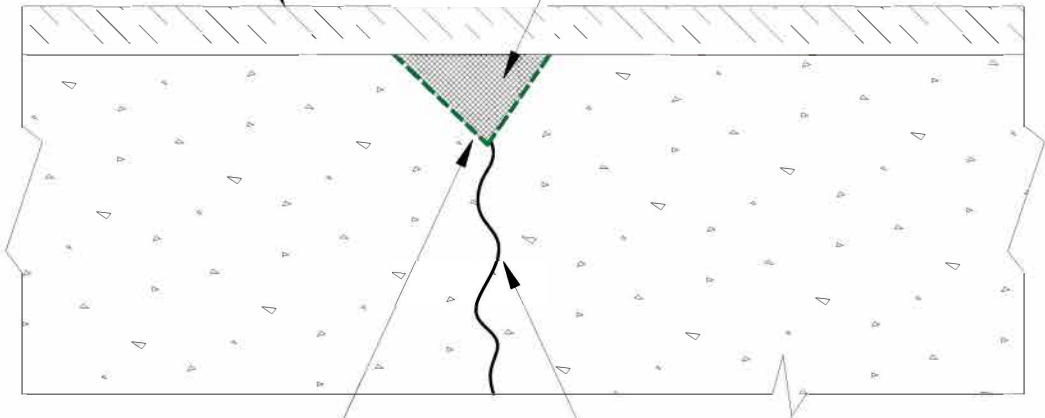

SAWCUT WITH
V-NOTCH BLADE

CRACK IN CONCRETE

**SHERWIN
WILLIAMS®**

HIGH
PERFORMANCE
FLOORING

sherwin-williams.com/resinflooring
(660) 638-5089

TITLE
HYBRI-FLEX FLOORING
STANDARD CRACK DETAIL

DATE
3/25

SCALE
NTS

DWG NO.
HF-27A

PROJECT