


HYBRI-FLEX FLOORING

1/3 DEPTH OF SLAB
OR 1-1/2" (38mm)

RIGID PATCH MATERIAL

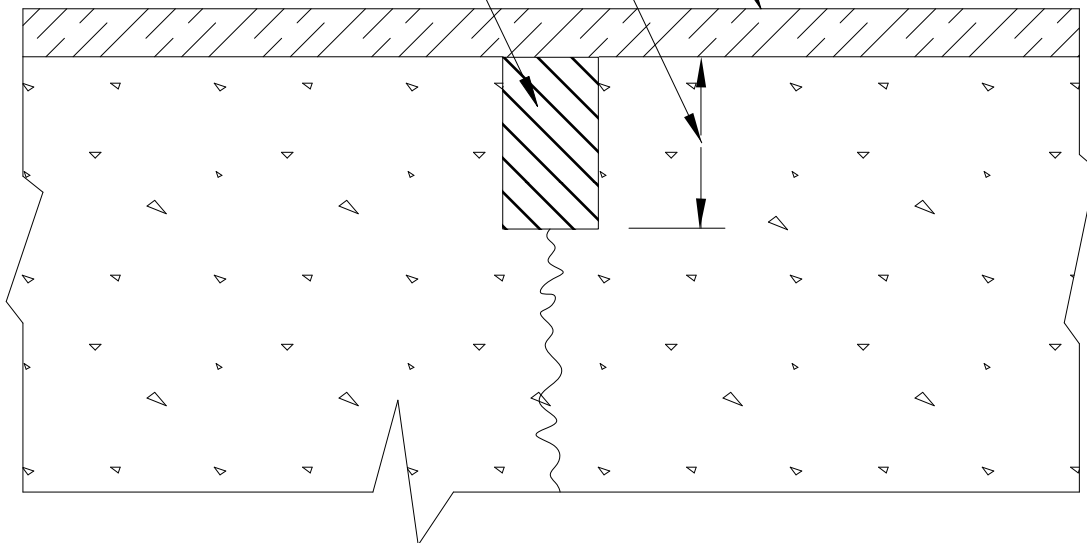

**SHERWIN
WILLIAMS®**

HIGH
PERFORMANCE
FLOORING

sherwin-williams.com/resinflooring
(660) 638-5089

TITLE

HYBRI-FLEX

CONTROL JOINT DETAIL (NO MOVEMENT)

DATE

3/25

SCALE

AS NOTED

DWG NO.

HF-4

PROJECT