


CEMENTITIOUS URETHANE FLOORING

1/3 DEPTH OF SLAB
OR 1-1/2" (38mm)

RIGID PATCH MATERIAL

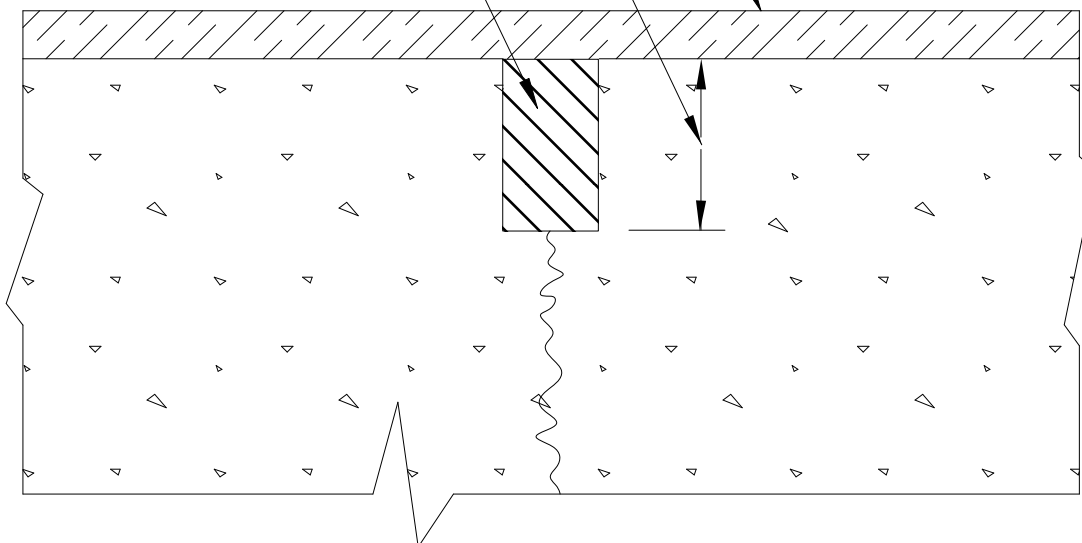

**SHERWIN
WILLIAMS®**

HIGH
PERFORMANCE
FLOORING

sherwin-williams.com/resinflooring
(660) 638-5089

TITLE

POLY-CRETE SLB

CONTROL JOINT DETAIL (NO MOVEMENT)

DATE

10 / 11

SCALE

AS NOTED

DWG NO.

PCSL-4

PROJECT