


FASTOP™ DECO FLAKE ONE

Sherwin-Williams FasTop Deco Flake One is a 3/16-1/4-inch thick decorative high performance flooring system ideal for pharmaceutical, research and biotech facilities or other applications where a decorative, heavy-duty floor is desired. The system combines a quick-curing, moisture insensitive base material with a mosaic flake broadcast. The clear grout coat and topcoat utilize Sherwin-Williams Accelera® One, a unique next generation urethane technology product that is convenient to install, while offering fast cure and excellent UV resistance and a range of chemicals and sterilants. FasTop Deco Flake One is installed over properly prepared concrete or as an overlay to existing well-bonded resinous floors.

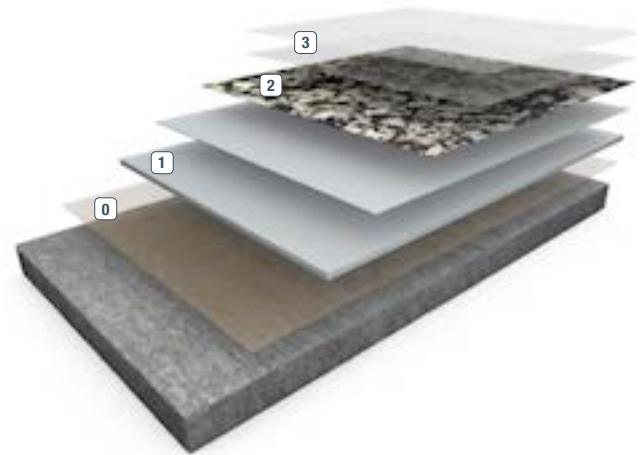

- 0 Primer (Optional)
- 1 Slurry
- 2 Broadcast Coat
- 3 Grout and Topcoat

BENEFITS

- Fast turnaround time
- Moisture insensitive and can be applied to “green” concrete
- No moisture testing required
- High temperature resistance
- Attractive yet functional
- Wide selection of colored chip blends
- Chemically resistant to a broad range of sterilants and disinfectants

USES


- Pharmaceutical, biotechnology and life science facilities
- Production floors
- Animal holding facilities/vivariums
- Laboratories
- Clean rooms and dry rooms
- Restrooms
- Change rooms



FEATURED COLORS



Snowy Blizzard



Modern Camo



Pebbled Path



Star Seeker



Blue Shadow



Celestial



Crashing Wave



Crescent Moon



Eclipse



Evening



Rebel Blue



Sapphire Velvet

Unlimited standard and custom blends available. Please see Deco Flake Color Cards for the extensive collection of standard blends. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

FOCUSED CHEMICAL RESISTANCE

Reagent	DFT (mils)	24 Hours	168 Hours
Spor-Klenz	16	No change	No change
Dyclean	16	No change	No change
Assurance	16	No change	No change
Windex	16	No change	No change
Simple Green	16	No change	No change
Super Shine All	16	No change	No change
Liquinox	16	No change	No change
3M Stainless Steel	16	No change	No change
CIP 100	16	No change	No change
Decon-Quat 100	16	No change	No change
Bleach	16	No change	No change
Vesta-Syde SQ	16	No change	No change

Tested in accordance with ASTM D1308 at 100% concentration or RTU if unspecified.

TYPICAL PHYSICAL PROPERTIES

Property	Result
Color	Refer to system color card
Gloss ASTM D523	90 units @ 60°
Dry and Cure Times	To touch: 25 minutes Foot traffic: 2 hours Recoat minimum: 2 hours Recoat maximum: 48 hours Full cure: 7 days
Abrasion Resistance ASTM D4060	80 mgs loss
Film Hardness ASTM D4366	60
Tensile Strength ASTM C 307	944 psi
Compressive Strength ASTM C 579	6,926 psi
Flexural Strength ASTM C 580	1,909 psi
Adhesion ASTM 7234	523 psi concrete failure
Impact Resistance	IR4
Reaction to Fire	Bfl – s1
Thermal Expansion Coefficient ASTM E 303	<38 PPM 0.7 DCOF
Service Temperature at 3/16"	-50°F – 266°F
Shrinkage Karsten Test (impermeable)	Nil
Water Absorption Karsten Test (impermeable)	Nil

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com