

## RESUFLOOR™ TOPFLOOR FX23


Sherwin-Williams Resufloor Topfloor FX23 combines Resufloor with hard aggregate to provide a tough traffic bearing system. Flexibility is achieved without the use of plasticizers or other additives that can separate or migrate as the system ages. The product remains flexible and continues to function for many years. Fiberglass scrim may be incorporated into the system to add tensile strength. Resufloor Topfloor FX23 provides waterproofing with the ability to bridge hairline cracks up to 1/16". The use of a hard aggregate provides abrasion and impact resistance, and skid inhibition properties. Various topcoats can be specified to protect against water, oils, chemicals and ultraviolet light.

### BENEFITS

- Abrasion and impact resistant
- Color options
- Slip resistant
- Waterproof
- Bridges hairline cracks
- Chemical and stain resistant
- Fiberglass scrim optional for maximum tensile strength
- Does not require priming in many cases

### USES


- Industrial floor
- Warehouses

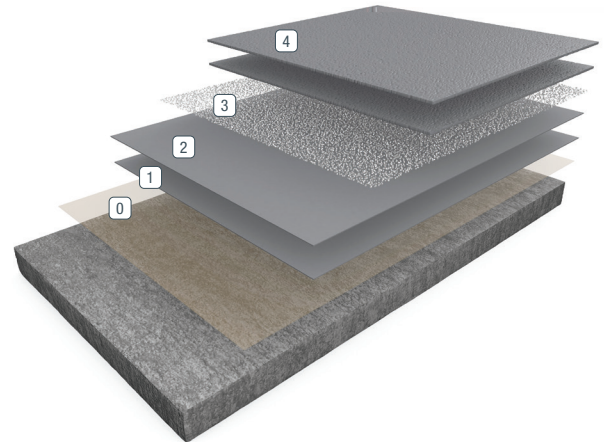

- ① Primer
- ② Resufloor Neat Membrane
- ③ Broadcast
- ④ Grout and Topcoat



**FEATURED COLORS**

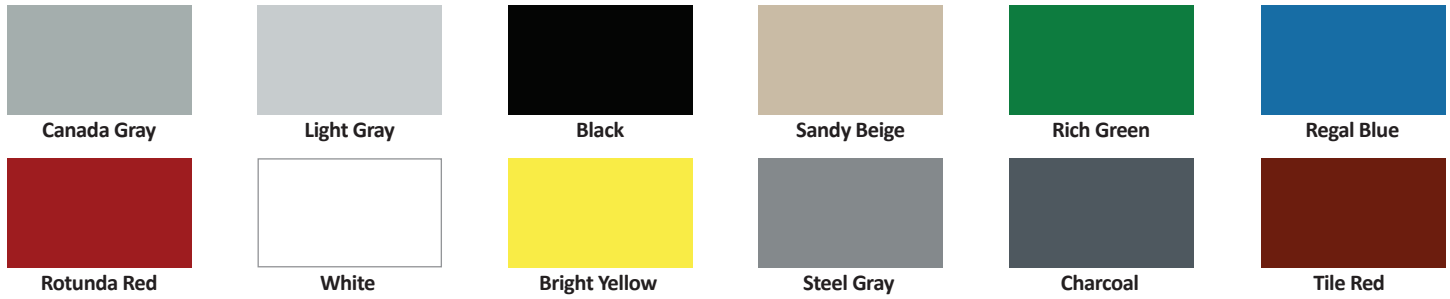

Standard and custom colors available. Please see the Resufloor Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at [floorvisualizer.sherwin-williams.com](http://floorvisualizer.sherwin-williams.com). This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

**ABOUT CHEMICAL RESISTANCE**

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

**Important considerations:**

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system’s standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

**TYPICAL PHYSICAL PROPERTIES**

Hardness, Shore D, ASTM D 2240	0/40
Tensile Strength, ASTM D 412	1,700 psi
Elongation, ASTM D 412	80%
Adhesion, ACI 503R	300 psi concrete failure
Flammability	Self-extinguishing over concrete
Thermal Cycling, ASTM C 884 (24 hours, -21°C to 25°C)	No cracking

**THE SHERWIN-WILLIAMS DIFFERENCE**

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

**United States & Canada**

[sherwin-williams.com/resin-flooring](http://sherwin-williams.com/resin-flooring)  
[swflooring@sherwin.com](mailto:swflooring@sherwin.com)