


## RESUFLOOR™ DECO FLAKE SD

**Sherwin-Williams Resuflor Deco Flake SD** is a high-gloss, static dissipative, mosaic pattern floor covering that incorporates vinyl chips in an epoxy base. These chips are sealed with a clear coat of an abrasion-resistant polyurethane glaze that provides a tough-wearing surface.

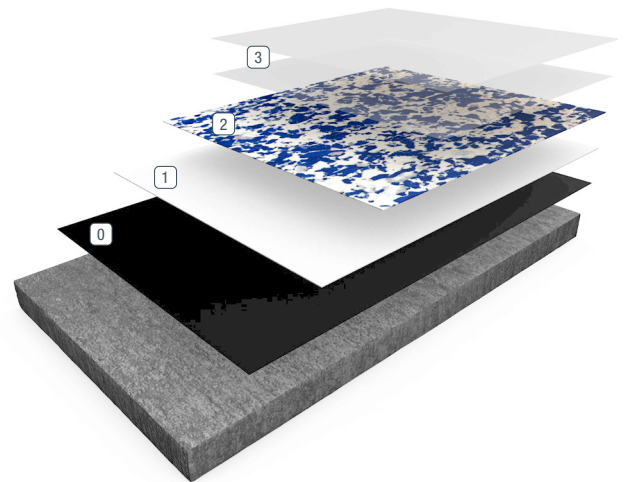

0 Primer Black

2 Broadcast

1 Base Coat

3 Grout/Seal Coat

### BENEFITS


- Aesthetically pleasing appearance
- Variety of chip blends available
- Seamless, decorative finish
- Protects against static discharge from people or equipment
- Chemical- and stain-resistant
- Meets ANSI standards for static dissipative floors

### USES

- Computer rooms
- Clean rooms and pharmaceuticals
- Hospitals
- Electronic assembly
- Quality control labs



FEATURED COLORS

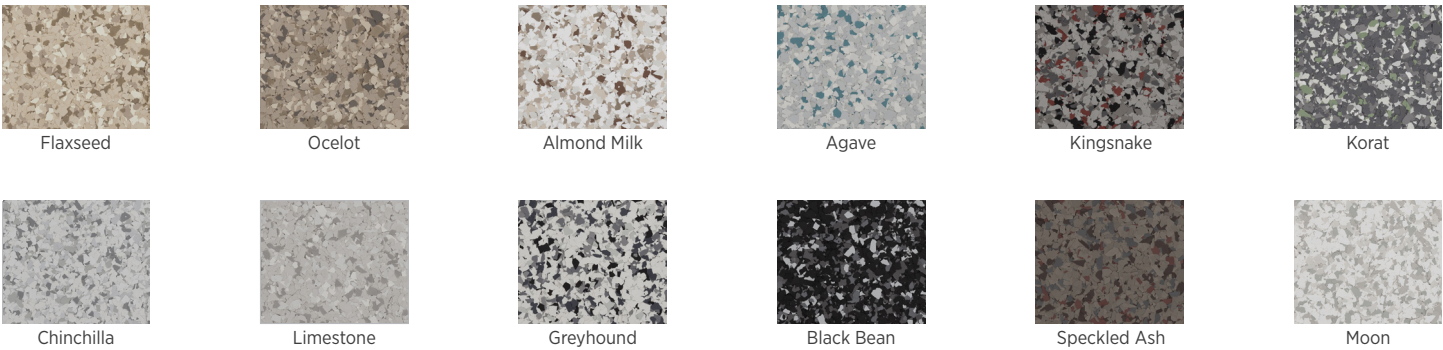

Unlimited standard and custom blends available. Please see Deco Flake Color Cards for the extensive collection of standard blends or use our Flooring Visualizer Tool to create your own custom blend at [floorvisualizer.sherwin-williams.com](https://floorvisualizer.sherwin-williams.com). This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system’s standard chemical resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Property	Result
<b>Gloss</b> (60 Gloss Meter @ 73F 50% RH)	80-100 pts
<b>Abrasion Resistance</b> ASTM D 4060, CS-17 Wheel, 1,000 cycles	38 mgs lost
<b>Ohms Resistance</b> ANSI ESD/ESD 7.1	<10 <sup>9</sup>
<b>Pencil Hardness</b> ASTM D 3363	2H
<b>Adhesion</b> ACI 503R	350 psi 100% concrete failure
<b>Flammability</b>	Self-extinguishing over concrete
<b>Impact Resistance</b> MIL-D-3134J	Direct, inch pound greater than 160, passes. Reverse, inch pound greater than 80, passes.
<b>Resistance to Elevated Temperatures 158°F</b> MIL-D-3134J	No slip or flow at required temperature of 158°F
ASTM C = Mortar System ASTM D = Resin only	

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.