

RESUFLOTM TOPCOAT CONDUCTIVE


Sherwin-Williams Resufloor Topcoat Conductive provides a thin-mil electrostatic conductive coating in an attractive polyurethane finish for superior abrasion and UV resistance.

ADVANTAGES

- Conductive 25,000 to 10⁶ ohms
- N-Methyl-2-pyrrolidone (NMP) resistance
- Abrasion resistant
- Seamless attractive finish
- UV resistance
- Easy to maintain
- Chemical resistant

Conductive uses:

- EV battery manufacturing
- Munition manufacturing
- Volatile solvent areas
- Powder environments
- Ordnance loading zone
- Combustible storage
- Fireworks assembly

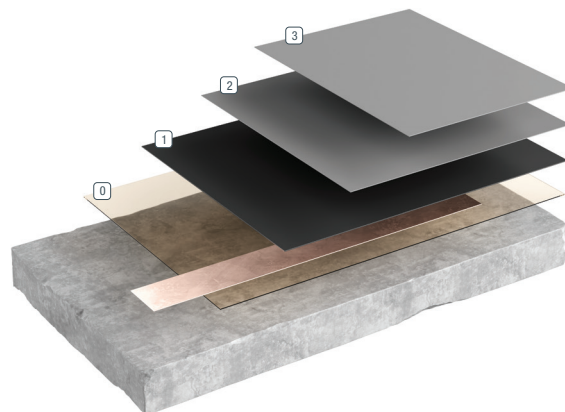

0 Standard Primer


2 First Topcoat

1 Conductive Primer

3 Second Topcoat



STANDARD COLORS

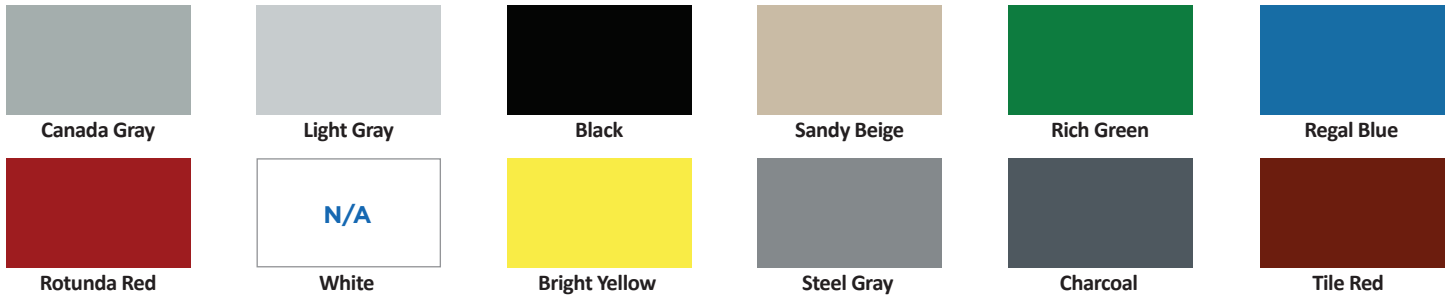

Standard and custom colors available. Please see the Resuflo Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Color	Most standard colors
Conductivity Resistance ANSI/ESD-S7.1	25,000 – 10 ⁶ ohms
Abrasion Resistance ASTM D4060	38 mg loss
Hardness @ 14 days Shore D ASTM D2240	80
Adhesion ACI 503R	300 psi concrete failure

ASTM D = Resin only

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooding@sherwin.com