

RESUFLO[™] TOPCOAT SDE


Sherwin-Williams Resufloor Topcoat SDE is a static dissipative epoxy flooring system. Installed at nominal 35 mils, it is comprised of a three-component, high-solids conductive epoxy, applied at 15-20 mils over an electrically insulating coat of epoxy. The system is ideal for moderate-use facilities that require reliable electrostatic discharge (ESD) protection.

BENEFITS

- LEED® v4 – Indoor Air Quality credits available
- Meets ANSI/ESD S20.20-2007 for resistance readings between 1×10^5 and $< 1 \times 10^9$ ohms and <100 volts body voltage generation
- Provides good chemical and stain resistance
- Withstands exposure to many solvents, fuels and chemicals
- Seamless and sanitary; easy to clean and maintain

USES

- Avionics and aerospace hangars
- Semi-conductor and electronics manufacturing
- Pharmaceutical, biotech and life science labs
- Packaging and converting facilities
- Industrial production and assembly

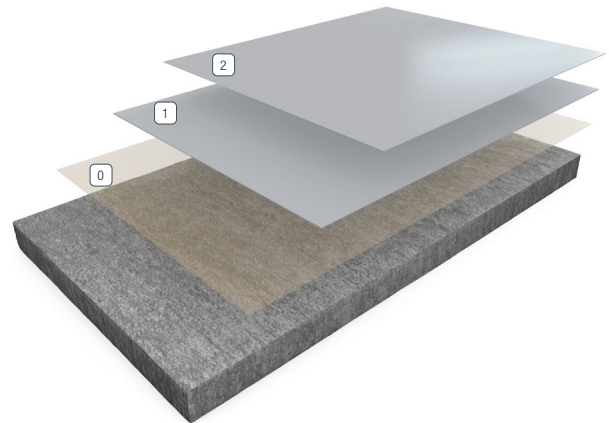


0 Primer

2 Topcoat

1 Build Coat



FEATURED COLORS

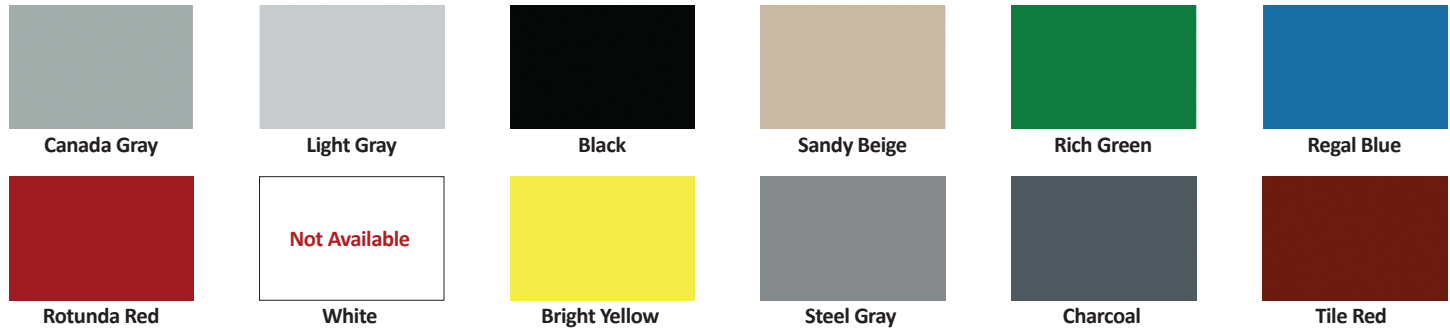

Please see the Resuflo Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Surface Resistance Point to Point/Point to Ground ESD Assoc., ANSI/ESD 7.1-2005	1x10 ⁵ ohms to <1x10 ⁹ ohms
Abrasion Resistance, ASTM D4060 Taber Abraser, CS-17 Wheel, 1,000 g load, 1,000 revolutions	90-100 mg/loss
Adhesion to Concrete, ASTM D4541	450 psi concrete failure
Adhesion to Concrete, ASTM D7234	732 psi concrete failure
Compressive Strength (epoxy), ASTM D695	13,500 psi
Shore D Hardness (epoxy), ASTM D2240	80-85 @ 0 sec 75-80 @ 15 sec
Tensile Strength, ASTM D2370	8,000 psi
Percent Elongation, ASTM D2370	5%

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com