


## RESUFLOR™ TOPCOAT SDU

Sherwin-Williams Resuflor Topcoat SDU is a high-performance, static control flooring system. Comprised of a high-solids epoxy base and a light-stable, electrostatic dissipative urethane topcoat, the system provides reliable ESD protection combined with excellent chemical resistance.

### BENEFITS

- LEED® v4 – Indoor Air Quality credits available
- Meets ANSI/ESD S20.20-2007 for resistance at  $1 \times 10^5$  to  $<1 \times 10^9$  ohms and  $<100$  volts body voltage generation
- Provides good chemical and stain resistance
- Withstands exposure to many solvents, fuels and Skydrol®
- Seamless and sanitary; easy to clean and maintain
- Attractive satin finish is available in choice of colors

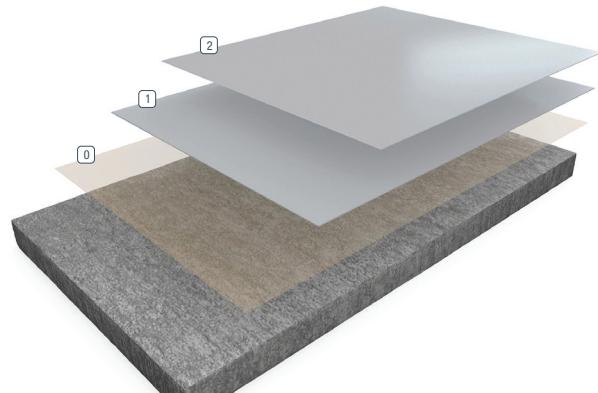

① Primer

② Topcoat


③ Build Coat

### USES

- Avionics and aircraft maintenance hangars
- Semiconductor and electronics manufacturing
- Pharmaceutical, biotech and life science labs
- Packaging and converting facilities
- Industrial production and assembly



## STANDARD COLORS

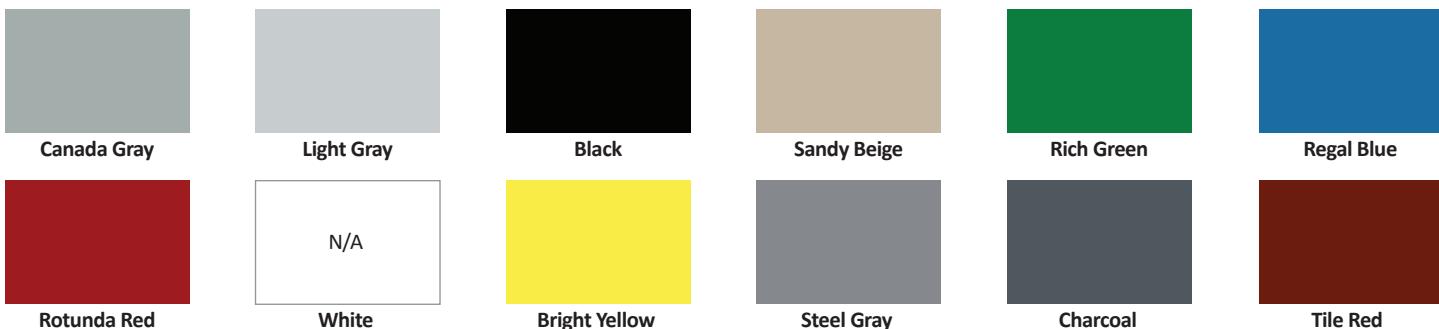

This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of the area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams representative for details.

## ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

## Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

## TYPICAL PHYSICAL PROPERTIES

Body Voltage Generation ANSI/ESD STM 97.2 (ANSI/ESD S20.20 - Method 2)	12 volts with ESD shoes 32 volts with heel straps
Body Voltage Decay (with ESD shoes or heel straps) AATCC 134-1979 (modified)	1,000 volts to <10 volts in <1.0 sec
Resistance to Ground in Combination with a Person ANSI/ESD STM 97.1 (ANSI/ESD S20.20 - Method 1)	<3.5 x 10 <sup>7</sup> ohms (ESD shoes or heel straps)
Surface Resistance Point to Point/Point to Ground ESD Assoc. ANSI/ESD 7.1-2005	1x10 <sup>5</sup> ohms to <1x10 <sup>9</sup> ohms
Abrasion Resistance, ASTM D4060 Taber Abraser, CS-17 Taber Abrasion Wheel, 1,000 g load, 1,000 revolutions.	38 mg/loss
Adhesion to Concrete, ASTM D4541	450 psi concrete failed
Adhesion to Concrete, ASTM D7234	732 psi concrete failed
Compressive Strength (epoxy) ASTM D695	13,500 psi
Flammability (topcoat resin) ASTM D635	182 mm/min
Shore D Hardness (epoxy), ASTM D2240	80-85 @ 0 sec 75-80 @ 15 sec
Tensile Strength, ASTM D2370	6,250 psi
Percent Elongation, ASTM D2370	6%

## THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

## United States &amp; Canada

[sherwin-williams.com/resin-flooring](http://sherwin-williams.com/resin-flooring)  
[swflooring@sherwin.com](mailto:swflooring@sherwin.com)

©2025 The Sherwin-Williams Company  
High Performance Flooring  
PM-1530952-08 12/25