

## RESUWALL™ AQUA GR II


Resuwall Aqua GR II Fiberglass Mat Reinforced Wall and Ceiling System is a multilayer, high build wall and ceiling surfacing system that utilizes an epoxy base coat with fiberglass mat reinforcement added for dimensional stability, strength and greater durability.

### BENEFITS

- Smooth and durable
- Highly washable surface
- Fiberglass reinforced for maximum tensile strength
- Low odor permits installation during normal working hours

### USES

- Commercial kitchens and service corridors
- Animal care and pharmaceutical facilities
- Healthcare and cleanrooms
- Food and beverage facilities
- Locker rooms, showers and restrooms
- Packaging and storage areas

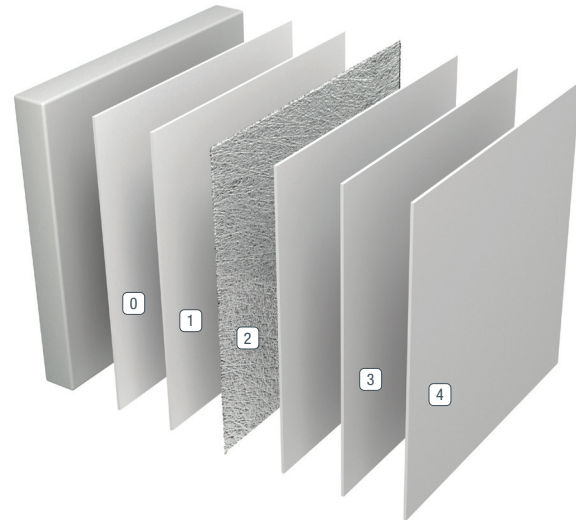

- |                      |                 |
|----------------------|-----------------|
| ① Primer             | ③ Level Coat(s) |
| ② Base/Saturant Coat | ④ Finish Coat   |
| ⑤ Reinforcement      |                 |



## ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical-resistant topcoat or surface proven to perform under typical conditions.

### Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present — as well as their concentrations and typical exposure times before cleanup — is critical for proper flooring system selection.
- During the specification process, a flooring system's standard chemical-resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical-resistant flooring is key to having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

## TYPICAL PHYSICAL PROPERTIES

|                                     |                                                  |
|-------------------------------------|--------------------------------------------------|
| Color                               | White, custom colors available                   |
| Hardness, Shore D, ASTM D 2240      | 80                                               |
| Tensile Strength, ASTM D 638        | 9,000 psi                                        |
| Adhesion, ASTM D4541                | 325 psi                                          |
| Flammability                        | Self-extinguishing over concrete                 |
| Resistance to Elevated Temperatures | No slip or flow at required temperature of 158°F |

## THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

### United States & Canada

[sherwin-williams.com/resin-flooring](https://sherwin-williams.com/resin-flooring)  
[swflooring@sherwin.com](mailto:swflooring@sherwin.com)