


RESUWALL™ AQUA HIGH BUILD WALL SYSTEM

Sherwin-Williams Resuwall Aqua High Build Wall System is a multilayer, high-build, wall and ceiling surfacing system that utilizes an epoxy base coat and urethane topcoat for durability.

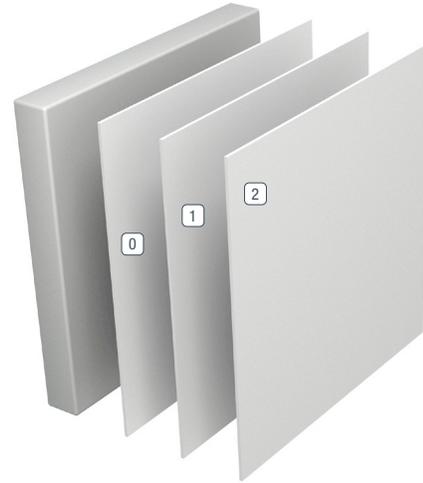

0 Primer

2 Optional Finish Coat

1 Base Coat

BENEFITS

- Smooth and durable
- Highly washable surface
- Low odor permits installation during normal work hours
- Available with antimicrobial agent

USES

- Pharmaceutical facilities
- Commercial kitchens
- Animal care
- Healthcare, clean rooms
- Food and beverage facilities
- Locker rooms, showers and restrooms
- Packaging and storage areas

LIMITATIONS

- Avoid gypsum-based substrate or repair materials in continuously wet areas



FEATURED COLORS



Canada Gray



Light Gray



Black



Sandy Beige



Rich Green



Regal Blue



Rotunda Red



White



Bright Yellow



Steel Gray



Charcoal



Tile Red

Standard and custom colors available. Please see the Resufloor Standard Industrial Color Card for details or envision a color in your space using our Flooring Visualizer Tool at floorvisualizer.sherwin-williams.com. This reproduction approximates the actual color. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat or method of application may cause color variance. Contact your Sherwin-Williams Representative for details.

ABOUT CHEMICAL RESISTANCE

Sherwin-Williams High Performance Flooring offers a broad range of systems to accommodate nearly every industrial, commercial and institutional setting. Each flooring system includes a standard chemical resistant topcoat or surface proven to perform under typical conditions.

Important considerations:

- The combination of cleaning solutions, sanitizing chemicals, processing substances and products found in any operational setting is unique.
- Knowing exactly which materials are present – as well as their concentrations and typical exposure times before cleanup – is critical for proper flooring system selection.
- During the specification process, a flooring system’s standard chemical resistant topcoat may get replaced with one better suited to unique facility conditions.

The ability of a flooring system to perform as designed relies heavily on proper selection. Matching each use case with the right chemical resistant flooring is key to a having a facility looking great and functioning at peak level over the long term.

See our Chemical Resistance Guide and other technical resources on our website. Connect with a Sherwin-Williams High Performance Flooring expert for help with specifying an optimal flooring system for your facility.

TYPICAL PHYSICAL PROPERTIES

Property	Result
Color	White, custom colors available
Hardness, Shore D ASTM D 2240	80
Resistance to Moisture	Excellent
Thermal Shock	Excellent
Adhesion to Concrete	Excellent
Fungus & Bacteria Resistance MIL-D-3134F Sec. 4.4.2.11	Will not support growth of fungus or bacteria per test specified TT-P-34
Adhesion ACI 503R	300 psi
Flammability	Self-extinguishing over concrete
Resistance to Elevated Temperatures	No slip or flow at required temperature 158°F

ASTM D = Resin only

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

United States & Canada

sherwin-williams.com/resin-flooring
swflooring@sherwin.com