

COMMERCIAL MARINE SOLUTIONS

**SHERWIN
WILLIAMS®**

VERSATILE PRODUCTS WITH PROVEN PERFORMANCE



FROM SPEC TO PROTECT

sherwin-williams.com/protective

HIGH-PERFORMANCE MARINE COATINGS THAT KEEP CUSTOMER PROJECTS ON BUDGET AND ON TIME

Your customers rely on you to be their one-stop shop for shipbuilding and repairs. From the first stroke of paint to coating restoration and touch-ups, Sherwin-Williams offers a complete line of high-performance marine coating technologies that can be delivered quickly – within the same or next day. Not only do marine coatings from Sherwin-Williams enable operational efficiencies in your coatings process, they protect vessels from corrosion, create aesthetic appeal and return vessels to service quickly.

Table of Contents

Epoxy Coatings	3
Single Component Coatings	8
Two-Part Component Coatings	11
Zinc Coatings	12
Antifoulant Coatings	14
Specialty Coatings	16
Solvents	16





EPOXY COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Carclad® Macropoxy 4200XL	76%	1:1	<185g/l; 1.5 lb/gal	5.0 – 13.0	4.0 – 10.0		MEK	50°F min / 110°F max	Epoxy mastic designed to maintain a jet black appearance after extensive weathering. May be used as a direct-to-metal protective coating.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		10-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	B58BY0422	I58BY0422	N/A		102194495		N/A		651180671				
Hardener	B58VY0422	N/A	N/A		N/A		N/A		651180689				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
DuraPlate 6000	100%	2:1	<16g/l; 0.13 lb/gal	40.0 – 125.0	40.0 – 125.0		MEK	35°F min / 150°F max	100% solids, high build, high strength, reinforced epoxy lining.			
PACKAGE COLOR	REX	KIT REX	5-GAL KIT SALES #	15-GAL KIT SALES #	3-GAL SALES #	5-GAL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
White	B62W00710	I62W00710	101852796	101852788	651104408	651104390	N/A					
Off White Part B	B62V00710	I62W00710-WK	N/A	101852788	N/A	651104465	N/A					
Black Part B	B62BV0710	I62W0710G-WK	N/A	101852804	N/A	651104473	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Fast Clad ER	100%	1:1	<85 g/l; 0.71 lb/gal	18.0 – 22.0	18.0 – 22.0		MEK1	40°F min / 110°F max	Edge retentive, ultra high solids epoxy.			
PACKAGE COLOR	REX	KIT REX	10-GAL KIT SALES #	100-DRUM KIT SALES #	5-GAL SALES #	DRUM SALES #	CARTRIDGE #	PDP LINK	EDS LINK	SDS LINK		
White	B62W00230	I62W0230C	620203919	620203943	640352621	640374799	TBD					
Blue (OAP)	B62L00230	I62L00230	620203869	620203877	640384921	650412224						
Black	B62BW0230	N/A	N/A	N/A	650696461	650374697						
Red Oxide	B62RW0230	I62RW0230	620203885	N/A	650374499	N/A						
PART B	B62V00230	N/A	N/A	N/A	640352613	640374781						



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Macropoxy 646 Fast Cure	72%	1:1	<250g/l; 2.08 lb/gal	7.0 – 13.5	5.0 – 10.0		R7K111	35°F min / 250°F max	High solids, high build, fast drying, polyamide epoxy mastic.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Black	B58B00600	I58B00600	620211383	620211391	640310280	640174355						
Mill White	B58W00610	I58W00610	620211508	620211516	640125001	640174686						
Ultradeep Tint Base	B58T00604	I58T00604	620211482	620211490	640310298	640174348						
Safety Yellow	B58Y00600	I58Y00600	620211524		640330379	640330601						
Safety Red	B58R00600	I58R00600	620211474		640330361	651151755						
Part B Hardener	B58V00600	N/A	N/A	N/A	640125027	640173597						

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Macropoxy 920 PrePrime	100%	3:1	<340g/l; 2.8 lb/gal	1.5 – 2.0	1.5 – 2.0		#54	40°F min / 120°F max	Penetrating epoxy designed for use over marginally prepared steel.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Transparent	B58T00101	I58T00101	620212100	620212118	501218705	640172805	TBD					
Part B	B58V00010	N/A	N/A	N/A	501218713	640172813	N/A					

EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Phenicon® HS	75%	4:1	<250 g/L; 2.08 lb/gal		5.0 – 7.0		#005	35°F min / 120°F max	Thin film, epoxy phenolic novolac lining for tanks, low temp B available.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Off white	CK920WA11	IK920WA11 I920WAT1L (LT)	N/A	620212902 620212910 (LT)	N/A	600102198	N/A					
Light gray	CK920A175	IK920A175 I920A175L (LT)	N/A	620212795 620212803 (LT)	N/A	600103121	N/A					
Light blue OAP	CK920L175	IK920L175 I920L175L (LT)	N/A	620212837 620212845 (LT)	N/A	650018112	N/A					
Part B	CK700C685											
Part B low temp	CK700C825	N/A	N/A	N/A	N/A	N/A	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® 5000 HS Epoxy	73%	1:1	<250 g/L; 2.08 lb/gal	7.0 – 10.0	5.0 – 10.0		#130	35°F min / 110°F max	Polyamine epoxy, highly surface tolerant, keel to mast epoxy.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Red	N11R00350	I11R00350	620217083	620217091	640358115	640351367	102087376					
Black	N11B00350	I11B00350	620213702	620213710	640358123	640350807	N/A					
White	N11W00350	I11W00350	620217125	620217133	640358107	640351375	N/A					
Buff	N11H00350	I11H00350	620213751	620217067	640414579	640414587	N/A					
Gray	N11A00350	I11A00350	620213686	620213694	640358982	640356689	102087384					
Part B	N11V00350	N/A	N/A	N/A	640358131	640350815	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® 6000	67%	4:1	<300 g/L; 2.50 lb/gal		5.0 – 7.0		#104 R6K30	20°F min / 120°F max	Epoxy Phenalkamine, damp surfaces, keel to mast epoxy.			
PACKAGE COLOR	REX	KIT REX	1.2-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Red	N11R00400	I11R00400	620217141	620217158	640354833	640354841	TBD					
Black	N11B00400	I11B00400	N/A	620217174	640399200	640358990	N/A					
White	N11W00400	I11W00400	620217216	620213843	640360038	640350104	N/A					
Buff	N11A00400	I11A00400	620217141	620217158	640354833	640354841	TBD					
Gray	N11V00400	N/A	N/A	N/A	640360046 (QT)	640350112 (GL)	N/A					
Part B	N11V00350	N/A	N/A	N/A	640358131	640350815	N/A					



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard 6100	%	4:1	<180g/l; 1.50 lb/gal	7.5 – 15.0	6.0 – 12.0		R6K10	20°F min / 120°F max	Modified high solids epoxy phenalkamine, formulated specifically for immersion and atmospheric service.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	N11B00450	I11B0450N	N/A		102717295		N/A	650045180				
Gray	N11A00450	I11A0450N	N/A		102717303		N/A	650045032				
Red Oxide	N11R00450	I11R0450N	N/A		102717311		N/A	650045057				
Hardener Part B	N11V00400	N/A	N/A		N/A		N/A	640350112 GAL				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® Tie Coat	62%	7:1	<340g/l; 2.8 lb/gal	6.0 – 12.0	4.0 – 8.0		MEK	23°F min / 110°F max	An extended overcoat window for anti-foulant application.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gold	P23Y00001	I23Y00001	102320009		102243052		651217762	651174153	N/A			
Part B	P23v00001	N/A	N/A		N/A		651217770	651174773	N/A			



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS			
Sherglass® Flake Filled	76% ±2%	4:1	<250g/l; 2.08 lb/gal	10.0 – 26.0	8.0 – 20.0		R2K4	40°F min / 120°F max	Glass flake reinforced amine epoxy coating designed for immersion service.					
PACKAGE COLOR	REX	KIT REX	5-GAL KIT SALES #		N/A		1-GAL SALES #		4-GAL SALES #		POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	B62B00525	I62B00525-WE I62B0525L-WE	620214064 620214072		N/A		N/A		640365821		N/A			
Haze Gray	B62A00525	I62A00525-WE I62A0525L-WE	620214049 620214056		N/A		N/A		640375978		N/A			
Red Oxide	B62R00525	I62R00525-WE I62R0525L-WE	620214080 620214098		N/A		N/A		640365862		N/A			
White OAP	B62W00525	I62W00525-WE I62W0525L-WE	620214106 620214114		N/A		N/A		640416723		N/A			
Standard Part B	B62V00525	N/A	N/A		N/A		640365805		N/A		N/A			
Low Temp Part B	B62V00526	N/A	N/A		N/A		640365813		N/A		N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
SherPlate 600	89%	4:1	<100g/l; 0.08 lbs/gal	5.0 – 11.0	3.0 – 10.0		MEK	35°F min / 120°F max	High solids, epoxy phenalkamide lining that meets both the health effects and testing requirements of NSF/ANSI/CAN 61.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Red	B58R00681	I58R00681 I58R0681L	102672599 102672607		102671690 102671708		651276982		651207664				
Beige	B58HW0681	I58HW0681 I58HW681L	102672656 102672664		102672573 102672581		651282386		651282394				
Light Blue	B58LW0681	I58LW0681 I58LW681L	102672615 102672623		102671716 102671724		651276990		651207680				
Mill White	B58W00681	I58W00681 I58W0681L	102672631 102672649		102671732 102672565		651277006		651277014				
Hardener Part B	B58V00680	N/A	651277030 QT		651207698 GAL		N/A		N/A				
Low Temp Part B	B58V00681	N/A	651277048 QT		651207706 GAL		N/A		N/A				



EPOXY COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Sherplate PW	100%	1:1	<85 g/l; 0.71 lb/gal	18.0 – 22.0	18.0 – 22.0		MEK1	40°F min / 110°F max	Edge retentive, ultra high solids epoxy.			
PACKAGE COLOR	REX	KIT REX	10-GAL KIT SALES #	100-DRUM KIT SALES #	5-GAL SALES #	DRUM SALES #	CARTRIDGE #	PDP LINK	EDS LINK	SDS LINK		
White	B62W00260	I62W00260	620214189	100632819	650339526	650394703						
Blue	B62L00260	I62L00260	620214148	N/A	650339518	N/A						
Part B	B62V00260	N/A	N/A	N/A	650339542	650394737						
Part B OAP	B62V00265	I62W0260P(WHITE) I62L0260P (BLUE)	620214197 (WHITE) 620214155 (BLUE)	100633254 (WHITE)	650367261	N/A						

SINGLE COMPONENT COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Corothane® I HS B65W00051	65%	1	<310g/l; 2.6 lb/gal	3.5 – 5.0	2.0 – 3.0		#15	20°F min / 100°F max	1 component, moisture curing urethane designed for low temperature.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Extra White	B65W00051	N/A	N/A	N/A	N/A	640374872	N/A					
Pastel TB	B65WX0051	N/A	N/A	N/A	650383003	640338620	N/A					
Ultradeep TB	B65TX0054	N/A	N/A	N/A	650383011	640338687	N/A					
Black	B65B00050	N/A	N/A	N/A	650356363	N/A	N/A					
Safety Yellow	B65Y00050	N/A	N/A	N/A	640349320	N/A	N/A					
Safety Red	B65R00050	N/A	N/A	N/A	640349312	N/A	N/A					



SINGLE COMPONENT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Industrial Enamel	43%	9:1	<441pgl; 3.68 lb/gal	4.5 – 9.0	1.9 – 3.9		NR	40°F min / 120°F max	Medium oil-alkyd all-purpose enamel, designed for interior and exterior use.				
PACKAGE COLOR	REX	1-GAL KIT SALES #		5-GAL KIT SALES #		N/A		N/A	N/A	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	B54B00011	006170203		006170211		N/A		N/A	N/A	N/A			
Deep Base	B54W00113	640517736		640517744		N/A		N/A	N/A	N/A			
Pure White	B54W00101	790799993		791299993		N/A		N/A	N/A	N/A			
Ultradeep	B54T00104	796999993		797499993		N/A		N/A	N/A	N/A			
Safety Red	B54R00038	006174064		640144341		N/A		N/A	N/A	N/A			
Safety Yellow	B54Y00037	006174072		640144358		N/A		N/A	N/A	N/A			
Safety Orange	B54E00039	006174056		640144325		N/A		N/A	N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
KEM Bond HS Alkyd Primer	60% ±2%	1	336g/l; 2.81 lb/gal	3.0 – 8.0	1.8 – 4.8		Xylene	40°F min / 120°F max	Fast drying, rust inhibitive, universal phenolic alkyd metal primer.				
PACKAGE COLOR	REX	1-GAL KIT SALES #		5-GAL KIT SALES #		N/A		N/A	N/A	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray	B50AZ0008	640344966		640344974		N/A		N/A	N/A	N/A			
Off White	B50WZ0004	006304539		640167151		N/A		N/A	N/A	N/A			
Red Oxide	B50NZ0003	006304521		006304497		N/A		N/A	N/A	N/A			

SINGLE COMPONENT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
KEM Kromik Universal Primer	%	9:1	<389g/l; 3.24 lb/gal	6.0 – 8.0	3.2 – 4.2		Xylene	40°F min / 120°F max	Rust inhibiting, modified phenolic alkyd resin primer, can be used as a universal primer under high performance topcoats.				
PACKAGE COLOR	REX		1-GAL KIT SALES #	5-GAL KIT SALES #		N/A		N/A	N/A	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Brown	B50NZ0006		640111746	640111753		N/A		N/A	N/A	N/A			
Gray	B50AZ0006		640348033	640348041		N/A		N/A	N/A	N/A			
Off White	B50WZ0001		640115325	640115333		N/A		N/A	N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
KEM Kromik 150 Alkyd	61%	1	<340g/l; 2.8 lb/gal	3.5 – 7.0	2.0 – 4.0		Xylene	40°F min / 120°F max	High solids, alkyd, gloss topcoat.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
White TB	N41W00651	N/A	N/A	N/A	650426737	650426745	N/A					
Ultradeep TB	N41T00654	N/A	N/A	N/A	650465107	650465115	N/A					
Black	N41B00650	N/A	N/A	N/A	651020331	651020349	N/A					
Yellow	N41Y00650	N/A	N/A	N/A	651020406	651124844	N/A					
Signal Red	N41R00650	N/A	N/A	N/A	651020356	N/A	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Pro Industrial Precat	%	1	<50gpl; 0.42 lb/gal	4.0	1.3		Water	50°F min / 120°F max	Single-component pre-catalyzed waterborne acrylic epoxy.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Extra White - Semigloss	K45W01151	N/A	N/A		N/A		650984016		650984024	N/A			
Deep Base - Semigloss	K45W01153	N/A	N/A		N/A		650984032		650984040	N/A			
Ultradeep - Semigloss	K46T01154	N/A	N/A		N/A		650984057		650984065	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Proline 1000	48%	1	<420g/l; <3.5 lb/gal	3.0 – 4.0	1.5 – 2.0		Spirits	40°F min / 100°F max	Formulated to be mildew resistant, washable, provide a gloss of over 85% at 60° and offers excellent non-yellowing characteristics.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
White	CQ0100000	N/A	N/A		N/A		008220337		008220352	N/A			
Tint Base	CQ01000BT	N/A	N/A		N/A		008222119		008222101	N/A			
Ultradeep Base	CQ01000DD	N/A	N/A		N/A		008222135		008222143	N/A			
Black	CQ0100010	N/A	N/A		N/A		008220485		N/A	N/A			

TWO-COMPONENT FINISH COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Acrolon® 218 Gloss	65%	6:1	<300g/l; 2.5 lb/gal	4.5 – 9.0	4.0 – 6.0		#58 / MEK	35°F min / 120°F max	Polyester modified, aliphatic, acrylic polyurethane / “workhorse”.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Extra White TB	B65W00611	I65W00611	620204859		620204867		640516357		640516365	TBD			
Ultradeep TB	B65T00604	I65T00604	620204834		620204842		640312484		640122313	N/A			
Safety Yellow	B65Y00600	I65Y00600	620204917		620204925		640312518		640131348	N/A			
Safety Red	B65R00600	I65R00600	620204735		N/A		640312500		N/A	N/A			
Black	B65B00600	I65B00600	620204420		N/A		640312492		640131322	TBD			
Part B	B65V00600	N/A	N/A		N/A		640312526 (QT)		640173704 (GI)	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Hi-Solids Polyurethane® 250	63%	4:1	<250g/l; 2.08 lb/gal	4.5 – 8.0	3.0 – 5.0		R7K111	20°F min / 120°F max	Low VOC aliphatic, acrylic polyurethane resin coating.			
PACKAGE COLOR	REX	KIT REX	1.25-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
White TB	B65WJ0311	I65WJ0311	620211144	620211151	601528128	601528136	TBD					
Ultradeep TB	B65TWJ304	I65TWJ304	620211128	620211136	601316011	601316029	N/A					
Safety Yellow	B65YWJ337	I65YWJ337	620211185	N/A	601539588	N/A	N/A					
Safety Red	B65RWJ338	I65RWJ338	620211110	N/A	601539620	N/A	N/A					
Part B	B60V00030	N/A	N/A	N/A	6304141 (QT)	6304281	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Pro Industrial Acrolon 100	45%	4:1	<98g/l; 0.82 lb/gal	4.0 – 8.0	1.8 – 3.6		Water	55°F min / 120°F max	An advanced technology, less than 100 grams per litre VOC, waterbased, acrylic urethane. High gloss, abrasion resistant and excellent weathering properties.				
PACKAGE COLOR	REX		KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Extra White	B65W00721		I65W00721	620215178		620215186		650022544	650022551	N/A			
Ultradeep Base	B65T00724		I65T00724	620215152		620215160		650022569	650022577	N/A			
Safety Yellow	B65Y00720		I65Y00720	620215210		N/A		650023997	N/A	N/A			
Hardener	B65V00720		N/A	N/A		N/A		650022585	650022593	N/A			



TWO-COMPONENT FINISH COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Sher-Loxane® 800 Polysiloxane	90%	4:1	<100g/l; 0.77 lb/gal	5.0 – 7.0	4.0 – 6.0		MEK	20°F min / 120°F max	DTM epoxy siloxane hybrid with a Low Temp Part B - immersion grade.			
PACKAGE COLOR	REX	KIT REX	1.25-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
White TB	B80W00501	I80W00501 I80W0501F	101271088 101967180	101271096 101967198	650972383	650972425	102153087					
Ultradeep TB	B80T00504	I80T00504 I80T0504F	101271062 101967206	101271070 101967214	650972375	650972391	N/A					
Safety Yellow	B80YW0500	I80YW0500 I80YW500F	101446730 101964872	101446722 101964880	651016065	651021123	N/A					
Safety Red	B80RW0500	I80RW0500	101446748	N/A	651023897	N/A	N/A					
Black	B80B500	I80B00500 I80B0500F	101561223 102099835	101683969 102099843	651045544	651067696	102153095					
Part B Part B Low Temp	B80V00500 B80V00502	N/A	N/A	N/A	650977184 (QT) 651124158 (QT)	650972433 651124166	N/A					

ZINC COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Corothane® Galvapak 1K	67%	1	<300g/l; 2.5 lb/gal	4.5 – 6.8	3.0 – 4.0		R7K15	20°F min / 120°F max	Moisture curing urethane, zinc-rich primer. Designed for low temperature application to steel surfaces. Low temperature application.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Gray	B65G00011	N/A	N/A	N/A	N/A	640316436	N/A					
Green	B65GG0011	N/A	N/A	N/A	N/A	650924897	N/A					
Red	B65RW0011	N/A	N/A	N/A	N/A	650197544	N/A					

ZINC COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Fast Clad® Zinc HS	62%	9:1	<300g/l; 2.50 lb/gal	3.0 – 6.5	2.0 – 4.0		MEK	40°F min / 120°F max	Inorganically reinforced zinc rich primer.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Gray / Green A	B69A00352	I69A00352	N/A	620204180	N/A	640360483	TBD					
Part B	B69V00352	N/A	N/A	N/A	N/A	640360491	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS			
Zinc Clad® II Plus	76%	3.66	<340g/l; 2.8 lb/gal	3.0 – 6.0	2.0 – 4.0		R7K111	20°F min / 130°F max	Three-component, inorganic ethyl silicate, zinc rich coating. This is fast drying, high solids, low VOC coating with 83%, by weight, of zinc in the dry film.					
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #		PDP LINK	EDS LINK	SDS LINK
Gray-Green Base, Part A	B69VZ0012	I69VZ0012	N/A		100667286		N/A		640350856	N/A				

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Zinc Clad® IV	68%	8:1	<340g/l; 2.8 lb/gal	5.0 – 8.0	3.0 – 5.0		MEK	40°F min / 120°F max	A two-component, polyamide epoxy, zinc-rich coating. It contains 85% by weight of zinc dust pigment in the dried film.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray / Green Binder U	B69A00008	620215616	N/A		N/A		N/A		006301147	N/A			
Hardener Part V	B69V00008	N/A	N/A		N/A		N/A		006301154	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Zinc Clad® 4100	74%	3	<340g/l; 2.80 lb/gal	4.0 – 7.0	3.0 – 5.0		MEK	35°F min / 120°F max	Three-component, polyamide epoxy, zinc rich coating. It conatins 89.2% by weight of zinc dust pigment in its dry film.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray-Green Base, Part A	B69A00120	I69A00120	651020539		101444206		101444198		651021818	N/A			
Hardener, Part B	B69V00120	N/A	N/A		N/A		651020554		650911142	N/A			
Zinc Dust	B69D00011	N/A	N/A		N/A		006304232		640322178	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Zinc Plate™ 3100		1:1	<0g/l; 0 lb/gal	1.7	0.6		Water		Two-package, waterborne, inorganic zinc pre-construction primer designed to provide excellent welding and weathering properties.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Gray	B69V00480	I69V00480	N/A		620215665		N/A		650391402	N/A			
Keg	B69D00480	N/A	N/A		N/A		N/A		650386196	N/A			

ZINC COATINGS (CONTINUED)


PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Zinc Plate™ Ultra II PCP	32.5%	1.74:1	<585g/l; 4.8 lb/gal	1.5 – 3.6	0.5 – 1.2		#58		Inorganic preconstruction zinc shop primer providing heat-resistance up to 1472°F (800°C), excellent welding properties, and resistance to zinc salt formation caused by weathering.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Paste - Gray, Part B	B69A00410	I69V00410	N/A	I69V00410	N/A	620215749	N/A					
Binder, Part A	B69V00410	N/A	N/A	N/A	N/A	N/A	N/A					

ANTIFOULANT COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard 1050 Voidcoat	52%	1	<12g/l; <0.1 lb/gal	8.0	4.0		Water	50°F min / 90°F max	Ideal for the tight scale and tight rust conditions normally found on the inner structures of barges and other marine structures.			
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Gray	P31A00011	N/A	N/A	N/A	N/A	101721249	N/A					
Red	P31R00011	N/A	N/A	N/A	N/A	101721264	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® Ablative AF	65%	N/A	<400g/l; 3.33 lb/gal		2.5 – 5.0		VM&P	Maximum 120°F	AF coating based on a polyamide polymer containing cuprous oxide.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Black	P30BQ0012	N/A	N/A	N/A	640355889	1600634	N/A					
Red	P30RQ0010	N/A	N/A	N/A	640355186	1600618	N/A					
Blue	P30LQ0013	N/A	N/A	N/A	640355178	1600642	N/A					

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Seaguard® Copper Bottom #45	53%	N/A	<400g/l; 3.33 lb/gal	4.0 – 5.0	2.0 – 2.5		Xylene	50°F min / 120°F max	Semi-hard, anti-fouling developed for the shallow draft trade.			
PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK		
Black	N51B00045	N/A	N/A	N/A	640345914	640345922	N/A					
Red	N51R00045	N/A	N/A	N/A	640345898	640345906	N/A					
Blue	N51L00045	N/A	N/A	N/A	640345955	640345963	N/A					

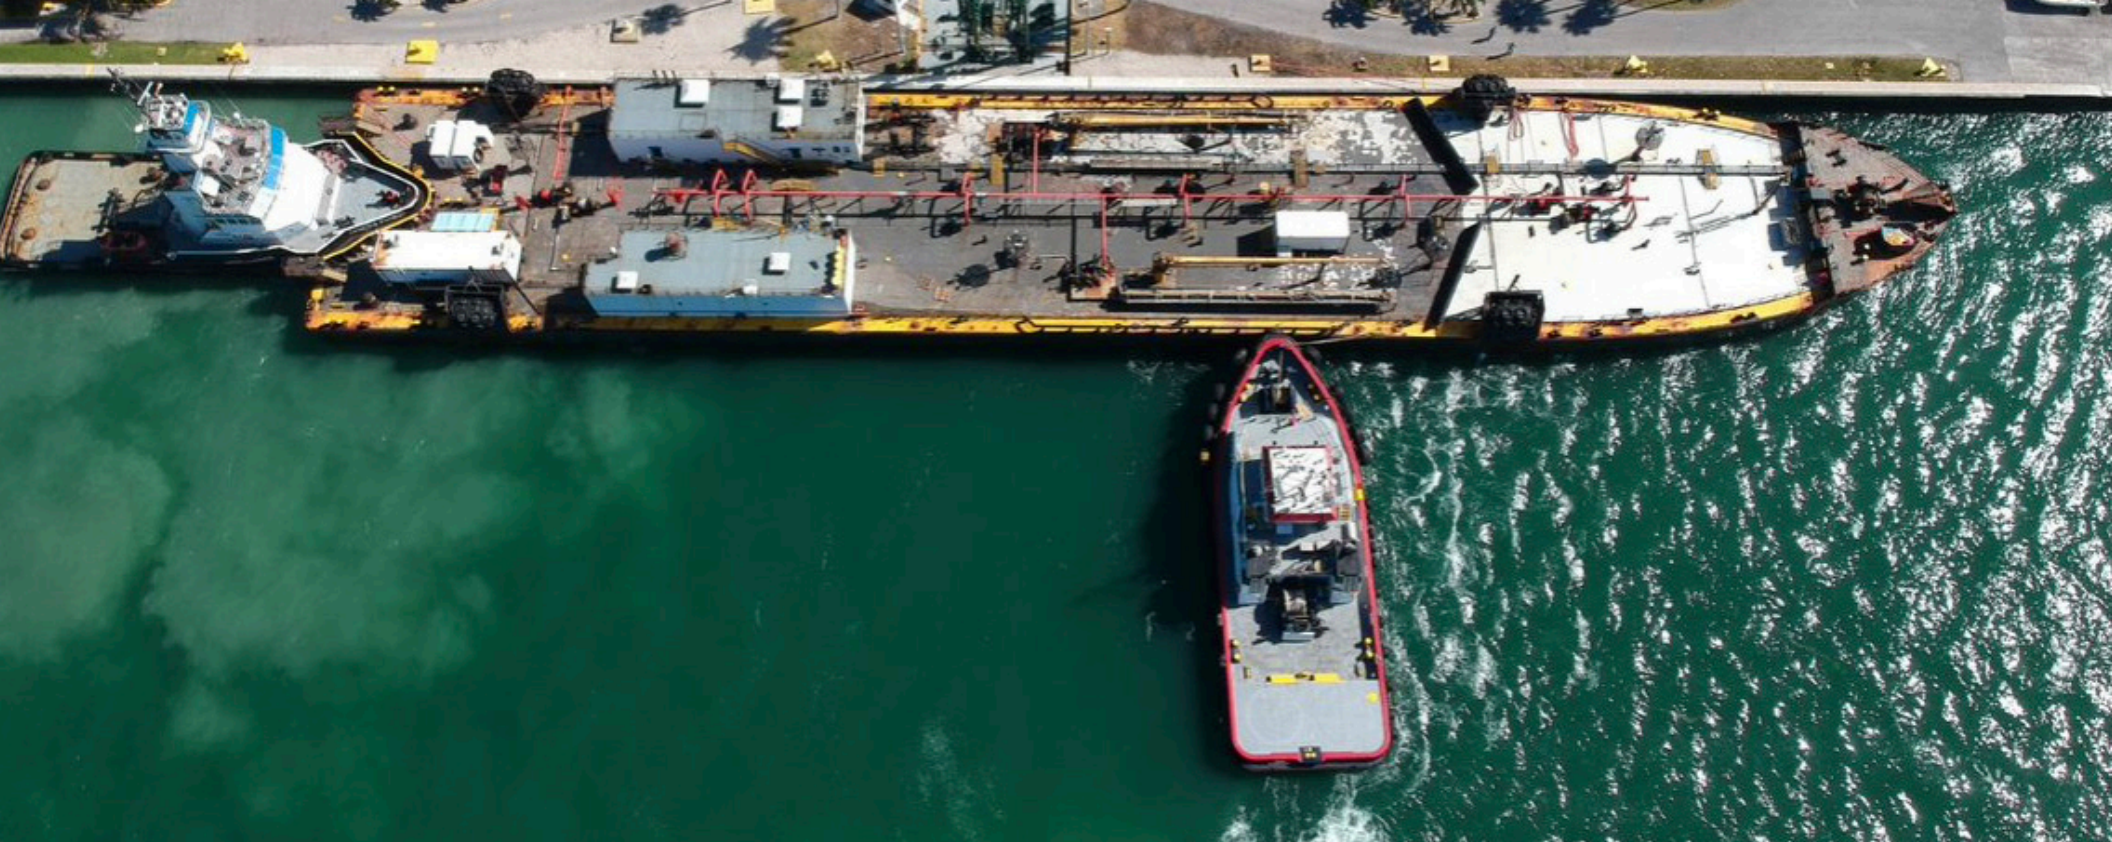

ANTIFOULANT COATINGS (CONTINUED)

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT DATA SHEET
Seaguard Soft Copper 1	55%	1	<382g/l; 3.18 lb/gal	4.5 – 9.0	2.5 – 5.0		Spirits	40°F min / 100°F max	Free eroding copper anti-fouling coating developed for commercial vessels with various activity levels and extended idle times.		

PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #	5-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Red	N50R00101	N/A	N/A	N/A	N/A	601132285	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS
Seavoyage® Copper Free AF	65%	N/A	<340g/l; 2.8 lb/gal		3.0 – 6.0		VM&P	40°F min / 100°F max	Copper and tin free ablative AF coating that deters fouling.		

PACKAGE COLOR	REX	KIT REX	2-GAL KIT SALES #	10-GAL KIT SALES #	1-GAL SALES #	PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Black	N51B00301	N/A	N/A	N/A	650096944	650096704	N/A			
Red	N51R00301	N/A	N/A	N/A	650096951	650096928	N/A			

SPECIALTY COATINGS

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS	
Pro-Line 4545 Splash Zone Compound	100%	1:1	<50 g/l; 0.42 lb/gal	1/8" – 2"	1/8" – 2"		N/A	N/A	2-component epoxy repair compound, developed for emergency repairs.			
PACKAGE COLOR	REX	KIT REX	2-QT KIT SALES #	N/A		N/A		N/A	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
Green Part A	CQ4545A00	CQ4545-34	100140854	N/A		N/A		N/A	N/A			
Part B	CQ4545B00	N/A	N/A	N/A		N/A		N/A	N/A			

PRODUCT NAME	VOLUME SOLIDS	RATIO	VOC INFORMATION	WFT	DFT	COVERAGE 30% LOSS	REDUCER	TEMPERATURE RANGE	PRODUCT DESCRIPTION	COST PER GALLON	ACCESS PRODUCT INFO AND DATA SHEETS		
Steel-Seam FT910	%	9:1	<	3	2		M	4	100% solids epoxy surfacing compound for steel.				
PACKAGE COLOR	REX	KIT REX	1-GAL KIT SALES #		5-GAL KIT SALES #		1-GAL SALES #		PAIL SALES #	POUCH SALES #	PDP LINK	EDS LINK	SDS LINK
White	B58W00910	I58W00910	100140854		620214379		N/A		640398566	N/A			
Black	B58V00910	N/A	N/A		N/A		N/A		640398574	N/A			

SOLVENTS

SOLVENT NAME	1-GAL SALES NUMBER	5-GAL SALES NUMBER	SDS	EDS
REDUCER #130 REDUCES: Seaguard 5000 HS	640312914	640312922		
REDUCER #104 / MAK REDUCES: Seaguard 6000	640312237	640312245		
REDUCER #54 REDUCES: Macropoxy 920 Pre-Prime	005308671	005308689		
REDUCER #111 REDUCES: Compliant Solvent	501136436	501248629		
R7K15 REDUCES: Macropoxy PW	640320834	640174389		
MEK REDUCES: Sher-Loxane 800 / Fast Clad Zinc / Tie Coat	001548734	001542414		
VM&P NAPHTHA REDUCES: Seaguard Ablative Antifoulant	001548700	001542356		
XYLENE REDUCES: KEM Kromik 150 / KEM Bond Primer	001548684	001542398		

COMMERCIAL MARINE SOLUTIONS

VERSATILE PRODUCTS WITH PROVEN PERFORMANCE

THE SHERWIN-WILLIAMS DIFFERENCE

The industry experts at Sherwin-Williams Protective & Marine are renowned authorities in their respective fields of knowledge – including Bridge & Highway, Fire Protection, Flooring, Food & Beverage, Freight Rail, Marine, Oil & Gas, Pharmaceutical, Power Generation, Steel Fabrication and Water & Wastewater. Our global technology expertise in areas including tank linings, passive fire protection, corrosion under insulation (CUI) testing and fusion-bonded epoxy drives game-changing innovation and influences global industry standards.



Unparalleled
distribution network



Global
industry expertise



Unmatched technical
and specification service



One-stop shop for
equipment and supplies

North America

sherwin-williams.com/protective
swprotective@sherwin.com

SHERWIN-WILLIAMS®

© 2023 The Sherwin-Williams Company

PM-854967-BR 1/23