SHERWIN-WILLIAMS.

SEAGUARD ONE-STEP SYSTEM



HIGH-PERFORMANCE INTERIOR MARINE DECKING

Sherwin-Williams SeaGuard One-Step System is an extremely durable, ultra-high-solids, low-odor system with a unique quartz-like finish. This system is qualified to U.S. Navy decking specifications and comes in eight stock colors (custom blends available). The One-Step System works in both wet and dry spaces and is easily applied on properly prepared surfaces, including steel, aluminum, sealed underlayment and properly cured primers. This provides a seamless, durable decking system that can include a cove base.

QUALIFIED TO MIL-PRF-32584, DECK COVERING MATERIALS MONOLITHIC

Type IV: Chemical-resistant flooring, underlayment required

Type V: Chemical rResistant flooring, no underlayment required

Class 1: Shipboard use Class 2: Submarine use

Grade A: All system coatings have a VOC content of less than 250 g/L

Composition E: Epoxy

The SeaGuard Bond Coat, SeaGuard Grout Coat and SeaGuard Clear Sealer meet IMO 2010 FTP Code Parts 2 and 5 of Annex 1.

SeaGuard Grout Coat is qualified to ANSI A118.10, American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-set Ceramic Tile and Dimension Stone Installation — 2014, allowing it to serve as a waterproof membrane in wet spaces. This approval eliminates the need for an additional waterproof membrane coat often required by competitive systems. Using SeaGuard Grout Coat reduces the number of coats, saves schedule and labor, and provides overall system cost savings.

BENEFITS



SUSTAINABILITY

- Low VOC
- Bio-renewable
- Ultra-high-solids coatings with less than 250 g/L VOC



EASE OF APPLICATION

- Excellent working times
- Ideal recoat windows for maximum productivity
- Reduced number of coats



PERFORMANCE

- Approved for both surface ships and submarines
- Tough, seamless quartz-like finish that can be formed into cove base



AESTHETICS

- Custom decorative options including logo designs and fleet colors
- · Safety markings/striping

FROM SPEC TO PROTECT

sherwin-williams.com/protective




SEAGUARD® ONE-STEP SYSTEM

INTERIOR MARINE DECKING

SYSTEM LAYERS

- 1 SeaGuard Substrate: Steel or Aluminum Deck
- 2 SeaGuard Bond Coat
- 3 SeaGuard One-Step Epoxy Decking
- 4 SeaGuard Grout Coat (as needed)
- 5 SeaGuard Clear Sealer

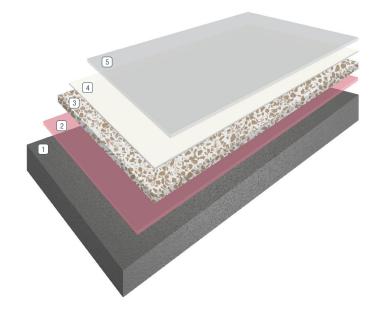

FEATURES

- Recommended uses include wet spaces, galleys, passageways and areas where deck irregularities are present. It is also used to create slope-to-drain and cove base areas.
- This system is formulated for excellent flexibility and adhesion to steel and aluminum decks.
- The SeaGuard Grout Coat is optimally designed for easy application as a sealer for porous surfaces and underlayment.
- SeaGuard Clear Sealer is formulated not to blush and provides a uniform, tough topcoat, which can be applied by brush, roller or squeegee.

UNMATCHED DISTRIBUTION AND SERVICE

Products You Need Right Now

Get the products you need with same- or next-day delivery and gain access to local inventory at more than 5,000 company-owned distribution points in North America.

Technical Service for Optimal Applications

Our technical service team brings extensive technology and product knowledge, as well as manufacturer equipment training, to ensure proficiency throughout the entire coatings process.

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams Protective & Marine delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe. Our broad portfolio of high-performance coatings and systems that excel at combating corrosion helps customers achieve smarter, time-tested asset protection. We serve a wide array of markets across our rapidly growing international distribution footprint, including Oil & Gas, Water & Wastewater, Bridge & Highway, Steel Fabrication, Flooring, Food & Beverage, Fire Protection, Marine, Rail and Power.