

ACRYDUR™ TOPFLOOR SL SR


Acrydur Topfloor SL SR is a very fast cure Methyl Methacrylate (MMA) self-levelling resin flooring system with a slip resistant finish. The system includes a tough elastic base coat with a quartz aggregate and UV stable topcoat. This provides a durable, hygienic finish perfect for fast turnaround areas.

BENEFITS

- Very fast cure
- Slip-resistant finish
- Sheen finish
- UV stable - non yellowing
- High chemical resistance
- Resistant to hot water
- Abrasion resistant
- Hard wearing
- Impermeable
- Fast turnaround time


USES

- Pharmaceutical manufacturing
- Laboratories
- Automotive manufacturing
- Aerospace manufacturing
- Workshops
- Heavy manufacturing
- Hangars
- Data centres
- Packaging areas
- Retail
- Commercial
- Studios
- Museums

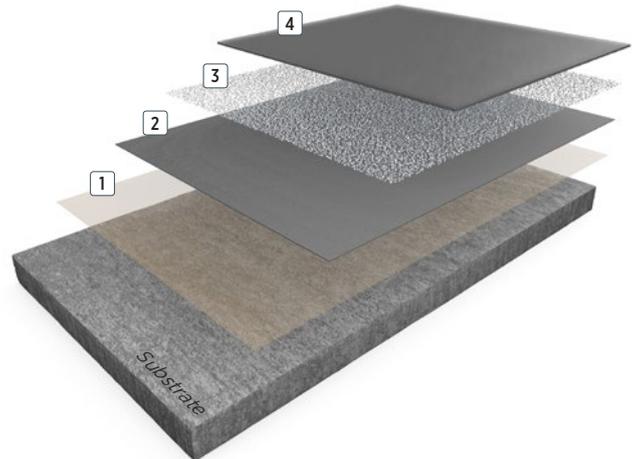

- 4 Topcoat: **Acrydur TC02**
- 3 Broadcast: **0.3 - 0.8mm quartz sand**
- 2 Base coat: **Acrydur BC02**
- 1 Primer: **Acrydur PR01**

3mm

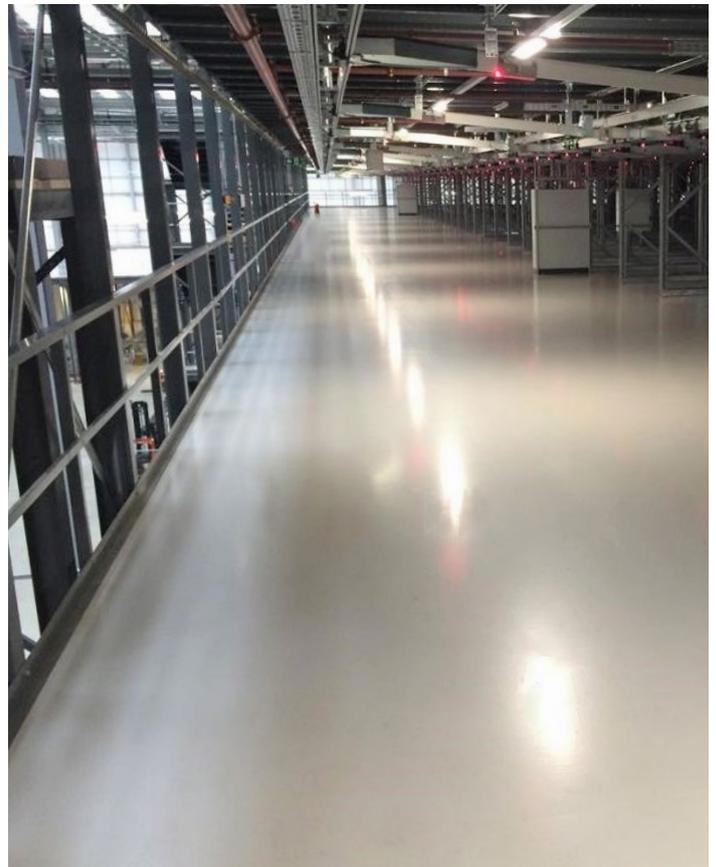

FEATURED COLOURS



RAL 7042 Light Grey



RAL 7037 Mid Grey



RAL 7012 Dark Grey



RAL 5010 Blue



Buff



Yellow



Red



RAL 6002 Green

This reproduction approximates the actual colour. Factors such as the type of product, degree of gloss, texture, size and shape of area, lighting, heat, or method of application may cause colour variance. Substituting other manufacturers' colours may not be representative of our blends. Contact your Sherwin-Williams representative for details.

SYSTEM COMPOSITION

Coat	Product options	Theoretical consumption kg/m ²	Application
Primer	Acrydur PR01	0.40	Roller
Base coat	Acrydur BC02	4	Trowel
Broadcast	0.3 - 0.8mm quartz sand	4	Broadcast
Topcoat	Acrydur TC02	0.45	Squeegee / roller
Approximate thickness: 3mm			

TYPICAL CURE TIMES

Temperature	10°C	20°C	30°C
Peroxide addition	4%	2%	1%
Pot life	15 mins	12 mins	10 mins
Cure time	40 mins	30 mins	30 mins

CHEMICAL RESISTANCE

Chemical	7 days exposure
Diesel	No change
Ethyl Alcohol	No change
Formaldehyde	No change
Beer	No change
Animal Fats	No change
Castor Oil	No change
Hydrochloric Acid 36%	No change
Mineral Oil	No change
Lactic Acid	No change
Potassium Hydroxide	No change

TYPICAL PHYSICAL PROPERTIES

Compressive strength	DIN 1164	45 N/mm ²
Tensile strength	DIN 1164	25 N/mm ²
Bond strength	BS EN 13892-8:2002	>1.5 N/mm ²
Impact resistance	BS EN ISO 6272-1:2011	IR4
Abrasion resistance	BS EN 13892-4:2002	AR1
Reaction to fire	EN 13501-1:2018	Class II
Temperature resistance	E _n	
Wear resistance	DIN 53 122	125 mg
FeRFA category	5	

THE SHERWIN-WILLIAMS DIFFERENCE

Sherwin-Williams High Performance Flooring delivers world-class industry subject matter expertise, unparalleled technical and specification service, and unmatched regional commercial team support to our customers around the globe.

